



FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

50Ω 0.01 to 5 GHz

THE BIG DEAL

- Excellent Gain Flatness and Return Loss over 50-1000 MHz
- High IP3 vs. DC Power consumption
- Broadband High Dynamic Range without external Matching Components
- Gain, 20 dB typ. at 0.4 GHz
- Gain flatness: ±0.3 dB over 50-1000 MHz
- Excellent Input Return Loss, up to 2 GHz, 17-24 dB
- High Pout, P1dB 20.0 dBm typ. at 0.4 GHz
- Excellent ESD protection, Class 1C for HBM
- No external matching components required



Generic photo used for illustration purposes only

CASE STYLE: DF782

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Base station infrastructure
- Portable Wireless
- CATV & DBS
- MMDS & Wireless LAN
- LTE

PRODUCT OVERVIEW

GVA-60+ (RoHS compliant) is a wideband amplifier fabricated using HBT technology and offers ultra flat gain over a broad frequency range and with high IP3. In addition, the GVA-60+, has good input and output return loss over a broad frequency range without the need for external matching components and has demonstrated excellent reliability. It has repeatable performance from lot to lot and is enclosed in a SOT-89 package for very good thermal performance.

KEY FEATURES

Feature	Advantages
Broad Band: 0.01 to 5.0 GHz	Broadband covering a broad range of IF frequencies and the primary wireless communications bands: Cellular, PCS, LTE, WiMAX
High IP3 vs. DC power Consumption 40 dBm typical at 0.05 GHz 35 dBm typical at 0.85 GHz	The GVA-60+ matches industry leading IP3 performance relative to device size and power consumption. The combination of the design and HBT Structure provides enhanced linearity over a broad frequency range as evidence in the IP3 being typically 16 dB above the P 1dB point to 0.85 GHz. This feature makes this amplifier ideal for use in: <ul style="list-style-type: none"> • Driver amplifiers for complex waveform up converter paths • Drivers in linearized transmit systems
Outstanding Input Return Loss up to 1 GHz: better than 20 dB.	The GVA-60+ provides excellent input return loss: 20 dB up to 1 GHz and 16.8 dB up to 2 GHz making this amplifier an ideal IF gain block that can be embedded in RF chains that have highly reflective components, and still maintain good system performance
No External Matching Components Required 10-24 dB to 2 GHz	GVA-60+ provides good Input and Output Return Loss without the need for any external matching components

REV. B
ECO-010563
GVA-60+
TH/RS/CP
110921





FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

Mini-Circuits

ELECTRICAL SPECIFICATIONS¹ AT 25°C AND VCC=5V, UNLESS NOTED

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.01		5	GHz
Gain	0.05	18.3	20.3	22.4	dB
	0.4	—	20.1	—	
	0.85	—	19.8	—	
	2.0	16.6	18.4	20.3	
	3.0	—	17.0	—	
	4.0	—	15.4	—	
	5.0	—	14.2	—	
Input Return Loss	0.05	—	23.1	—	dB
	0.4	—	24.0	—	
	0.85	16.0	21.2	—	
	2.0	—	16.8	—	
	3.0	—	11.5	—	
	4.0	—	8.9	—	
	5.0	—	8.1	—	
Output Return Loss	0.05	—	11.2	—	dB
	0.4	—	11.8	—	
	0.85	10.0	12.0	—	
	2.0	—	9.6	—	
	3.0	—	8.0	—	
	4.0	—	7.5	—	
	5.0	—	7.8	—	
Reverse Isolation	2.0		25.2		dB
Output Power at 1dB Compression	0.05	0.05	20.1	—	dBm
	0.4	0.4	19.9	—	
	0.85	0.85	19.5	—	
	2.0	—	17.9	—	
	3.0	—	14.6	—	
	4.0	—	12.1	—	
	5.0	—	10.0	—	
Output IP3	0.05		40.5		dBm
	0.4		39.3		
	0.85		35.6		
	2.0		28.9		
	3.0		24.5		
	4.0		21.5		
	5.0		19.3		
Noise Figure	0.05	—	3.9	5.9	dB
	0.4	—	4.0	6.0	
	0.85	—	4.0	—	
	2.0	—	4.1	—	
	3.0	—	4.1	—	
	4.0	—	4.3	—	
	5.0	—	4.5	—	
Device Operating Voltage		4.8	5.0	5.2	V
Device Operating Current			92.0	99.0	mA
Device Current Variation vs. Temperature ³			172		µA/°C
Device Current Variation vs. Voltage			0.041		mA/mW
Thermal Resistance, junction-to-ground lead			37		°C/W

(1) Measured on Mini-Circuits Characterization test board TB-313. See Characterization Test Circuit (Fig. 1)

(2) Low Frequency cut-off determined by external coupling capacitors and external bias choke.

(3) Current at 85°C – Current at -45°C)/130

Mini-Circuits®



FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

Mini-Circuits®

MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature (ground lead)	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Operating Current at 5V	140 mA
Power Dissipation	0.7 W
Input Power (CW)	28 dBm (10-1000 MHz, +5 minutes) 13 dBm (1000-5000 MHz, +5 minutes) 8 dBm (continuous) 28 dBm (10-1000 MHz, +5 minutes)
DC Voltage on Pin 3	6V

Permanent damage may occur if any of these limits are exceeded.

Electrical maximum ratings are not intended for continuous normal operation.

For continuous operation, do not exceed 5.2V device voltage.

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

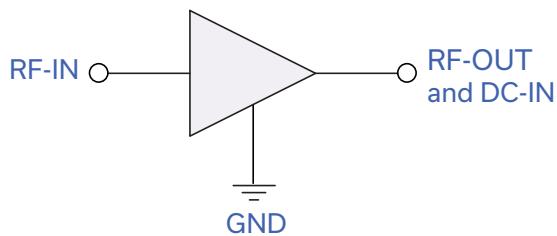

Function	Pin Number	Description
RF IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit", Fig. 2
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.



FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

Mini-Circuits®

CHARACTERIZATION TEST CIRCUIT

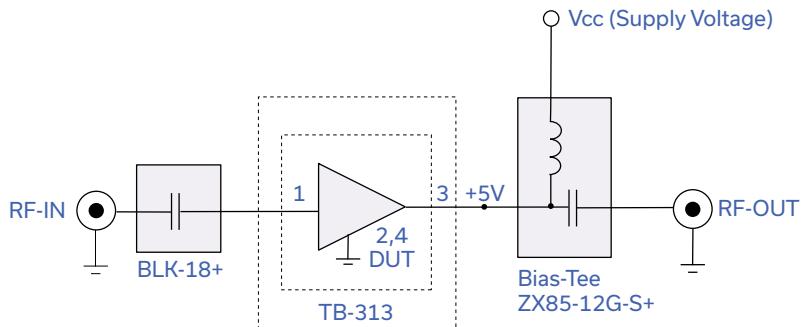


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-313)
Gain, Return loss, Output power at 1dB compression ($P_{1\text{ dB}}$) , output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: $\text{Pin} = -25\text{dBm}$
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, $-18\text{ dBm}/\text{tone}$ at input.

RECOMMENDED APPLICATION CIRCUIT

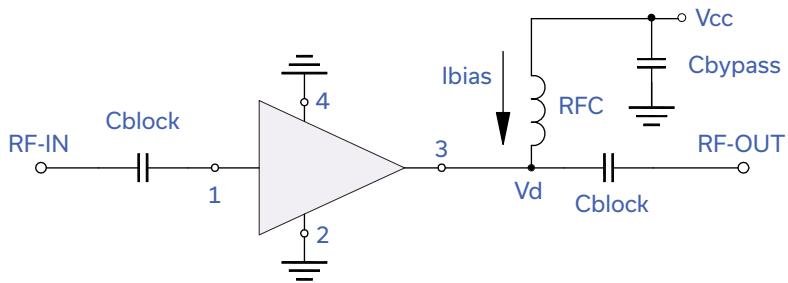


Fig 2. Test Board includes case, connectors, and components soldered to PCB

PRODUCT MARKING



Marking may contain other features or characters for internal lot control

Mini-Circuits®



FLAT GAIN, HIGH IP3

Monolithic Amplifier

GVA-60+

Mini-Circuits®

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS

[CLICK HERE](#)

Performance Data	Data Table Swept Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 (SOT 89) Plastic package, exposed paddle lead finish: Matte-tin
Tape & Reel Standard quantities available on reel	F55 7" reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL-255
Evaluation Board	TB-596-60+
Environmental Ratings	ENV08T1


ESD RATING

Human Body Model (HBM): Class 1C (1000 to <2000V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M2 (100 to <200V) in accordance with ANSI/ESD STM5.2-1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

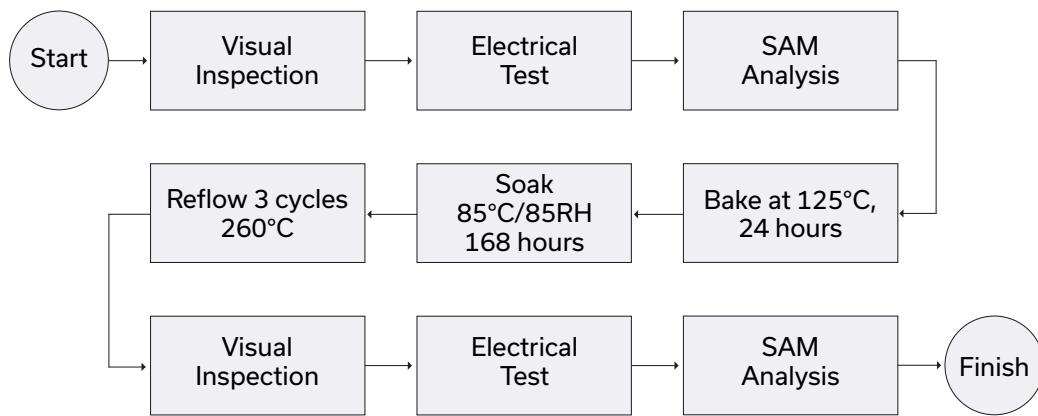MSL TEST FLOW CHART**NOTES**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

*Typical Performance Data***NOTE: Use PDF Bookmarks to view DATA at required conditions****Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 90.89 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.16	26.10	15.22	8.50	1.05	0.52	--	19.38	3.28
30.0	20.51	24.54	21.12	10.55	1.05	0.50	44.38	20.45	3.86
50.0	20.34	24.40	23.09	11.20	1.06	0.52	40.26	20.75	3.83
70.0	20.30	24.29	24.13	11.37	1.06	0.51	41.06	20.66	3.79
90.0	20.28	24.25	24.86	11.45	1.06	0.51	40.87	20.69	3.79
100.0	20.27	24.29	24.94	11.51	1.07	0.52	39.45	20.69	3.83
200.0	20.21	24.29	24.99	11.65	1.07	0.53	39.53	20.90	3.71
300.0	20.17	24.29	24.47	11.71	1.07	0.53	39.81	20.88	3.96
400.0	20.12	24.32	23.97	11.78	1.08	0.54	39.07	20.69	3.95
500.0	20.07	24.39	23.35	11.86	1.09	0.55	37.99	20.67	3.96
600.0	20.02	24.39	22.69	11.93	1.09	0.55	37.41	20.58	3.92
700.0	19.95	24.44	22.12	11.99	1.10	0.56	36.54	20.48	3.95
800.0	19.87	24.51	21.54	12.11	1.11	0.58	35.92	20.39	3.94
900.0	19.78	24.55	20.96	12.18	1.12	0.59	35.86	20.52	3.96
1000.0	19.69	24.61	20.50	12.25	1.13	0.60	35.04	20.40	4.00
1200.0	19.50	24.69	19.72	12.29	1.15	0.62	33.48	19.86	3.97
1400.0	19.27	24.83	19.16	12.27	1.17	0.65	32.83	19.57	3.98
1500.0	19.16	24.86	18.89	12.20	1.18	0.65	32.09	19.33	4.00
1600.0	19.01	24.99	18.46	12.17	1.20	0.67	31.74	18.84	4.02
1800.0	18.77	25.08	18.19	11.89	1.22	0.69	30.77	18.35	4.01
2000.0	18.49	25.19	17.70	11.62	1.25	0.71	30.02	17.94	4.02
2100.0	18.34	25.28	17.53	11.47	1.26	0.72	29.36	17.49	4.02
2200.0	18.21	25.29	17.38	11.27	1.27	0.73	28.71	17.09	4.07
2300.0	18.08	25.28	17.12	11.06	1.27	0.73	28.73	16.86	4.07
2400.0	17.93	25.32	16.95	10.88	1.28	0.74	27.96	16.37	4.02
2500.0	17.77	25.36	16.59	10.74	1.30	0.75	27.80	16.27	4.08
2600.0	17.61	25.36	16.44	10.60	1.30	0.76	27.43	15.76	4.09
2700.0	17.48	25.34	16.04	10.34	1.30	0.76	26.79	15.48	4.19
2800.0	17.30	25.37	15.98	10.26	1.32	0.77	26.64	15.12	4.18
2900.0	17.18	25.37	15.51	10.03	1.32	0.78	26.02	14.83	4.17
3000.0	17.03	25.28	15.31	9.84	1.31	0.78	25.96	14.59	4.09
3100.0	16.87	25.30	15.13	9.75	1.32	0.79	25.70	14.22	4.12
3200.0	16.65	25.46	15.09	9.85	1.36	0.80	25.44	13.98	4.17
3300.0	16.56	25.26	14.61	9.50	1.33	0.80	24.70	13.51	4.23
3400.0	16.41	25.17	14.33	9.34	1.32	0.80	24.73	13.31	4.20
3500.0	16.27	25.05	14.11	9.13	1.31	0.81	24.49	13.15	4.21
3600.0	16.13	25.15	13.67	9.07	1.32	0.82	24.04	12.62	4.23
3700.0	15.92	25.09	13.75	9.04	1.33	0.82	23.90	12.43	4.28
3800.0	15.81	24.88	13.44	8.78	1.30	0.82	23.86	12.06	4.22
3900.0	15.67	25.03	13.11	8.73	1.32	0.83	23.59	11.91	4.25
4000.0	15.48	24.83	13.07	8.55	1.31	0.83	23.41	11.58	4.27
4100.0	15.27	25.17	12.97	8.79	1.39	0.85	23.36	11.43	4.27
4200.0	15.20	24.65	12.55	8.30	1.29	0.84	23.11	11.11	4.24
4300.0	15.01	24.77	12.48	8.37	1.32	0.85	23.01	10.76	4.32
4400.0	14.85	24.68	12.31	8.22	1.32	0.85	22.83	10.66	4.36
4500.0	14.68	24.76	12.16	8.24	1.34	0.86	22.74	10.35	4.33
4600.0	14.60	24.51	11.61	7.89	1.28	0.86	22.49	10.07	4.31
4700.0	14.35	24.40	11.86	7.85	1.30	0.85	22.36	9.71	4.38
4800.0	14.27	24.37	11.31	7.64	1.27	0.86	22.32	9.70	4.34
4900.0	14.08	24.24	11.28	7.57	1.27	0.86	22.55	9.46	4.41
5000.0	13.88	24.26	11.32	7.49	1.30	0.86	22.41	9.49	4.44



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



MMIC Amplifier

Typical Performance Data

GVA-60+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 81.29 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.08	25.17	14.64	8.01	1.01	0.42	--	18.67	3.17
30.0	20.46	24.43	20.69	10.44	1.05	0.49	40.43	19.68	3.79
50.0	20.29	24.42	22.34	11.09	1.07	0.52	38.97	19.91	3.75
70.0	20.26	24.30	23.55	11.27	1.06	0.51	39.10	19.85	3.71
90.0	20.23	24.26	24.16	11.36	1.06	0.52	39.44	19.88	3.74
100.0	20.22	24.28	24.21	11.41	1.07	0.52	38.28	19.89	3.76
200.0	20.16	24.26	24.27	11.55	1.07	0.52	38.60	20.06	3.66
300.0	20.12	24.25	23.89	11.59	1.07	0.53	37.94	20.05	3.88
400.0	20.08	24.33	23.37	11.69	1.08	0.54	37.81	19.92	3.87
500.0	20.02	24.34	22.84	11.77	1.09	0.55	37.45	19.92	3.93
600.0	19.96	24.38	22.31	11.84	1.09	0.56	36.38	19.84	3.89
700.0	19.89	24.40	21.79	11.90	1.10	0.56	35.70	19.79	3.89
800.0	19.81	24.46	21.23	12.01	1.11	0.58	35.17	19.71	3.84
900.0	19.72	24.51	20.72	12.07	1.12	0.59	35.05	19.82	3.86
1000.0	19.63	24.56	20.26	12.15	1.13	0.60	34.40	19.76	3.92
1200.0	19.43	24.66	19.51	12.20	1.15	0.62	32.83	19.33	3.92
1400.0	19.20	24.79	18.96	12.18	1.17	0.65	32.11	19.09	3.89
1500.0	19.09	24.78	18.72	12.11	1.18	0.65	31.56	18.85	3.91
1600.0	18.93	24.93	18.31	12.08	1.20	0.67	31.09	18.38	3.98
1800.0	18.69	24.98	18.03	11.81	1.22	0.69	30.18	17.91	3.95
2000.0	18.40	25.07	17.56	11.54	1.24	0.71	29.49	17.51	3.92
2100.0	18.25	25.17	17.39	11.41	1.26	0.72	28.84	17.06	3.97
2200.0	18.12	25.18	17.27	11.22	1.27	0.73	28.27	16.66	3.98
2300.0	17.98	25.15	17.01	11.00	1.27	0.73	28.14	16.44	3.97
2400.0	17.83	25.20	16.82	10.83	1.28	0.74	27.47	15.96	3.93
2500.0	17.67	25.25	16.49	10.69	1.29	0.75	27.29	15.86	4.01
2600.0	17.51	25.31	16.34	10.56	1.31	0.76	27.00	15.36	4.00
2700.0	17.38	25.24	15.94	10.31	1.30	0.76	26.32	15.07	4.06
2800.0	17.21	25.25	15.88	10.24	1.31	0.77	26.18	14.74	4.07
2900.0	17.08	25.23	15.45	10.01	1.31	0.77	25.56	14.44	4.07
3000.0	16.93	25.16	15.27	9.82	1.31	0.78	25.54	14.19	3.98
3100.0	16.77	25.22	15.08	9.73	1.32	0.79	25.21	13.83	3.99
3200.0	16.54	25.35	15.05	9.83	1.36	0.80	25.00	13.57	4.07
3300.0	16.45	25.16	14.60	9.50	1.33	0.80	24.20	13.10	4.13
3400.0	16.31	25.10	14.31	9.33	1.32	0.80	24.30	12.90	4.10
3500.0	16.16	24.96	14.11	9.14	1.31	0.81	24.05	12.74	4.12
3600.0	16.02	25.06	13.69	9.07	1.32	0.82	23.62	12.21	4.12
3700.0	15.82	25.03	13.77	9.05	1.34	0.82	23.49	12.03	4.16
3800.0	15.70	24.81	13.47	8.78	1.31	0.82	23.42	11.68	4.12
3900.0	15.56	24.93	13.13	8.75	1.33	0.83	23.16	11.53	4.08
4000.0	15.37	24.71	13.10	8.57	1.31	0.83	22.94	11.20	4.10
4100.0	15.16	25.10	13.02	8.82	1.39	0.85	22.97	11.06	4.18
4200.0	15.09	24.58	12.61	8.32	1.29	0.84	22.72	10.71	4.15
4300.0	14.90	24.71	12.54	8.39	1.33	0.85	22.55	10.34	4.19
4400.0	14.75	24.65	12.37	8.24	1.33	0.85	22.40	10.27	4.22
4500.0	14.58	24.68	12.22	8.25	1.35	0.86	22.32	9.96	4.23
4600.0	14.50	24.49	11.67	7.91	1.29	0.86	22.08	9.67	4.17
4700.0	14.24	24.37	11.93	7.87	1.31	0.85	21.95	9.35	4.23
4800.0	14.17	24.29	11.39	7.65	1.28	0.86	21.90	9.32	4.24
4900.0	13.98	24.19	11.35	7.59	1.28	0.86	22.12	9.07	4.28
5000.0	13.79	24.20	11.39	7.51	1.31	0.86	22.01	9.08	4.31



ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

MMIC Amplifier

GVA-60+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 101.11 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.16	24.88	14.87	8.14	1.00	0.39	--	19.70	3.40
30.0	20.53	24.52	21.33	10.60	1.05	0.50	44.18	20.99	3.94
50.0	20.37	24.39	23.21	11.26	1.06	0.51	42.01	21.39	3.95
70.0	20.33	24.31	24.62	11.45	1.06	0.51	41.94	21.21	3.88
90.0	20.30	24.36	25.42	11.56	1.07	0.52	42.06	21.25	3.91
100.0	20.29	24.34	25.47	11.61	1.07	0.52	40.73	21.23	3.93
200.0	20.23	24.32	25.53	11.75	1.07	0.53	41.41	21.50	3.85
300.0	20.19	24.34	25.00	11.80	1.07	0.53	40.42	21.46	4.04
400.0	20.15	24.40	24.36	11.89	1.08	0.54	39.43	21.18	4.10
500.0	20.10	24.42	23.65	11.95	1.09	0.55	38.84	21.14	4.09
600.0	20.04	24.45	23.04	12.02	1.09	0.56	37.57	21.02	4.04
700.0	19.98	24.49	22.36	12.07	1.10	0.57	36.98	20.87	4.06
800.0	19.90	24.55	21.78	12.18	1.11	0.58	36.19	20.76	4.05
900.0	19.82	24.60	21.16	12.25	1.12	0.59	36.03	20.89	4.10
1000.0	19.73	24.62	20.69	12.32	1.13	0.60	35.38	20.72	4.11
1200.0	19.54	24.77	19.86	12.34	1.15	0.62	33.89	20.12	4.08
1400.0	19.33	24.84	19.26	12.31	1.17	0.64	33.09	19.85	4.10
1500.0	19.22	24.87	19.02	12.25	1.18	0.65	32.40	19.60	4.13
1600.0	19.07	25.02	18.56	12.22	1.20	0.67	31.93	19.13	4.14
1800.0	18.84	25.15	18.27	11.93	1.22	0.69	31.11	18.63	4.14
2000.0	18.56	25.27	17.74	11.64	1.25	0.71	30.44	18.25	4.17
2100.0	18.41	25.30	17.60	11.50	1.26	0.72	29.74	17.79	4.17
2200.0	18.28	25.30	17.43	11.30	1.26	0.73	29.18	17.39	4.19
2300.0	18.15	25.38	17.13	11.07	1.27	0.73	29.08	17.17	4.23
2400.0	18.01	25.34	16.95	10.89	1.28	0.74	28.41	16.68	4.21
2500.0	17.85	25.43	16.54	10.74	1.29	0.75	28.26	16.59	4.24
2600.0	17.69	25.47	16.41	10.60	1.31	0.76	27.95	16.08	4.22
2700.0	17.56	25.39	15.99	10.36	1.30	0.76	27.30	15.80	4.32
2800.0	17.39	25.44	15.91	10.26	1.31	0.77	27.10	15.45	4.33
2900.0	17.26	25.46	15.41	10.03	1.31	0.78	26.56	15.16	4.32
3000.0	17.12	25.32	15.21	9.84	1.30	0.78	26.49	14.92	4.23
3100.0	16.95	25.35	15.00	9.75	1.31	0.79	26.18	14.56	4.24
3200.0	16.73	25.47	14.98	9.85	1.35	0.80	26.00	14.29	4.34
3300.0	16.64	25.30	14.50	9.50	1.32	0.80	25.21	13.84	4.37
3400.0	16.49	25.20	14.18	9.33	1.31	0.81	25.25	13.62	4.32
3500.0	16.35	25.13	13.96	9.11	1.30	0.81	25.01	13.45	4.35
3600.0	16.20	25.15	13.53	9.05	1.31	0.82	24.59	12.95	4.40
3700.0	15.99	25.12	13.61	9.03	1.32	0.82	24.45	12.75	4.46
3800.0	15.88	24.94	13.28	8.76	1.29	0.82	24.40	12.38	4.38
3900.0	15.73	25.02	12.93	8.71	1.31	0.83	24.11	12.24	4.41
4000.0	15.55	24.79	12.89	8.55	1.29	0.83	23.93	11.93	4.37
4100.0	15.33	25.11	12.81	8.78	1.36	0.85	23.96	11.77	4.45
4200.0	15.26	24.65	12.38	8.27	1.27	0.84	23.68	11.44	4.41
4300.0	15.06	24.76	12.31	8.34	1.31	0.85	23.54	11.08	4.46
4400.0	14.90	24.71	12.12	8.20	1.31	0.85	23.43	11.00	4.50
4500.0	14.73	24.78	11.97	8.21	1.33	0.86	23.34	10.67	4.51
4600.0	14.64	24.48	11.44	7.86	1.26	0.86	23.09	10.40	4.45
4700.0	14.38	24.43	11.68	7.83	1.29	0.86	22.96	10.07	4.51
4800.0	14.31	24.33	11.13	7.62	1.25	0.86	22.93	10.07	4.56
4900.0	14.11	24.21	11.08	7.55	1.26	0.86	23.12	9.83	4.56
5000.0	13.91	24.23	11.12	7.48	1.28	0.86	23.02	9.82	4.61



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

GVA-60+

12/18/2012

Page 3 of 9

MMIC Amplifier

GVA-60+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 73.59 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.24	25.33	17.82	8.88	1.02	0.47	--	18.97	2.58
30.0	20.59	23.91	24.75	10.74	1.02	0.45	34.48	19.77	3.17
50.0	20.42	23.74	28.22	11.34	1.02	0.45	34.24	19.95	3.08
70.0	20.38	23.71	29.91	11.44	1.03	0.46	33.90	19.94	3.03
90.0	20.35	23.74	31.54	11.48	1.03	0.46	34.02	19.95	3.05
100.0	20.34	23.69	31.49	11.49	1.03	0.46	33.51	19.97	3.06
200.0	20.28	23.75	29.69	11.51	1.04	0.47	33.86	20.15	2.91
300.0	20.26	23.71	29.60	11.90	1.04	0.48	33.92	20.17	3.15
400.0	20.24	23.74	28.81	12.24	1.04	0.49	33.89	20.09	3.19
500.0	20.18	23.77	26.41	12.30	1.05	0.50	33.61	20.09	3.22
600.0	20.13	23.80	24.88	12.29	1.05	0.50	33.62	20.04	3.18
700.0	20.06	23.88	23.56	12.26	1.06	0.52	33.64	20.00	3.20
800.0	19.98	23.93	22.40	12.28	1.07	0.53	33.54	19.94	3.12
900.0	19.89	23.95	21.56	12.30	1.08	0.53	33.53	20.02	3.18
1000.0	19.81	24.07	20.95	12.39	1.09	0.55	32.15	20.00	3.20
1200.0	19.62	24.16	19.56	12.52	1.11	0.58	32.38	19.70	3.22
1400.0	19.39	24.30	19.01	12.52	1.13	0.60	31.78	19.55	3.18
1500.0	19.28	24.35	18.79	12.47	1.14	0.61	30.88	19.34	3.18
1600.0	19.15	24.47	18.39	12.41	1.16	0.63	30.56	18.92	3.21
1800.0	18.91	24.62	18.13	12.06	1.18	0.65	29.51	18.56	3.23
2000.0	18.62	24.76	17.65	11.76	1.21	0.68	28.33	18.17	3.23
2100.0	18.49	24.88	17.60	11.50	1.22	0.69	27.75	17.76	3.26
2200.0	18.34	24.90	17.51	11.35	1.23	0.70	27.01	17.40	3.23
2300.0	18.20	24.96	17.39	11.10	1.24	0.70	26.77	17.24	3.25
2400.0	18.04	25.04	17.14	10.98	1.26	0.72	26.25	16.77	3.25
2500.0	17.90	25.07	16.90	10.71	1.26	0.72	26.11	16.70	3.26
2600.0	17.75	25.13	16.44	10.48	1.27	0.73	25.64	16.25	3.26
2700.0	17.58	25.18	16.05	10.32	1.29	0.74	24.97	15.94	3.33
2800.0	17.43	25.22	15.57	10.09	1.29	0.75	24.87	15.69	3.36
2900.0	17.25	25.29	15.40	10.06	1.31	0.76	24.31	15.40	3.38
3000.0	17.16	25.20	14.88	9.73	1.29	0.76	24.13	15.25	3.25
3100.0	17.02	25.11	14.87	9.53	1.29	0.76	23.81	14.89	3.24
3200.0	16.88	25.20	14.61	9.42	1.30	0.77	23.35	14.67	3.29
3300.0	16.70	25.13	14.61	9.32	1.30	0.78	22.85	14.23	3.40
3400.0	16.53	25.16	14.38	9.21	1.31	0.79	22.91	14.01	3.39
3500.0	16.38	25.05	14.18	9.04	1.30	0.79	22.59	13.90	3.36
3600.0	16.27	25.13	13.51	8.96	1.30	0.81	22.29	13.44	3.41
3700.0	16.10	25.04	13.32	8.86	1.30	0.81	22.02	13.29	3.41
3800.0	15.94	24.96	13.17	8.72	1.30	0.81	22.01	12.98	3.40
3900.0	15.82	24.80	12.92	8.48	1.27	0.81	21.78	12.90	3.38
4000.0	15.59	24.90	13.07	8.60	1.31	0.82	21.57	12.59	3.37
4100.0	15.55	24.89	12.28	8.41	1.28	0.83	21.26	12.40	3.38
4200.0	15.37	24.66	12.28	8.18	1.26	0.83	21.31	12.12	3.40
4300.0	15.21	24.60	12.07	8.06	1.26	0.84	21.01	11.78	3.40
4400.0	15.06	24.51	11.88	7.88	1.24	0.84	20.88	11.71	3.45
4500.0	14.92	24.50	11.60	7.79	1.24	0.84	20.71	11.48	3.44
4600.0	14.70	24.52	11.76	7.83	1.28	0.85	20.63	11.16	3.41
4700.0	14.56	24.43	11.58	7.71	1.26	0.85	20.41	10.89	3.46
4800.0	14.41	24.23	11.36	7.42	1.23	0.84	20.34	10.90	3.48
4900.0	14.27	24.08	10.95	7.24	1.20	0.85	20.35	10.68	3.52
5000.0	14.05	24.00	11.01	7.14	1.21	0.85	20.27	10.66	3.56



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

GVA-60+

12/18/2012

Page 4 of 9

MMIC Amplifier

Typical Performance Data

GVA-60+

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 61.95 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.18	24.59	17.40	8.53	0.99	0.38	--	17.92	2.46
30.0	20.53	23.70	24.86	10.46	1.01	0.42	32.22	18.77	2.99
50.0	20.37	23.48	28.27	11.05	1.01	0.43	31.76	18.89	3.01
70.0	20.32	23.62	30.07	11.17	1.02	0.45	31.57	18.91	2.93
90.0	20.30	23.59	31.48	11.19	1.02	0.45	31.80	18.91	2.97
100.0	20.28	23.57	31.55	11.20	1.02	0.45	31.35	18.94	2.96
200.0	20.23	23.61	29.71	11.21	1.03	0.46	31.46	19.08	2.82
300.0	20.21	23.57	29.59	11.57	1.03	0.46	31.55	19.09	3.12
400.0	20.18	23.57	28.68	11.91	1.03	0.47	31.52	19.07	3.08
500.0	20.13	23.64	26.30	11.98	1.04	0.48	31.23	19.07	3.12
600.0	20.07	23.70	24.74	11.97	1.05	0.49	31.21	19.02	3.11
700.0	19.99	23.72	23.50	11.95	1.05	0.50	31.19	19.00	3.13
800.0	19.91	23.78	22.23	11.97	1.06	0.51	31.05	18.94	3.05
900.0	19.82	23.82	21.42	11.99	1.07	0.52	30.97	18.98	3.09
1000.0	19.73	23.92	20.82	12.10	1.08	0.54	30.03	18.99	3.14
1200.0	19.53	24.02	19.34	12.22	1.10	0.57	30.00	18.79	3.11
1400.0	19.30	24.18	18.79	12.24	1.13	0.60	29.59	18.71	3.11
1500.0	19.18	24.25	18.53	12.18	1.14	0.61	28.80	18.54	3.10
1600.0	19.04	24.36	18.15	12.13	1.15	0.63	28.52	18.25	3.13
1800.0	18.79	24.48	17.88	11.82	1.18	0.65	27.67	17.99	3.13
2000.0	18.49	24.64	17.36	11.55	1.21	0.67	26.73	17.62	3.15
2100.0	18.35	24.70	17.30	11.30	1.22	0.68	26.25	17.26	3.13
2200.0	18.20	24.82	17.21	11.14	1.23	0.69	25.56	16.91	3.17
2300.0	18.06	24.83	17.11	10.93	1.24	0.70	25.35	16.77	3.18
2400.0	17.89	24.97	16.85	10.81	1.26	0.72	24.86	16.34	3.13
2500.0	17.74	24.97	16.61	10.57	1.27	0.72	24.75	16.26	3.19
2600.0	17.59	24.99	16.18	10.33	1.27	0.73	24.34	15.84	3.20
2700.0	17.41	25.06	15.79	10.17	1.29	0.74	23.72	15.54	3.26
2800.0	17.26	25.12	15.33	9.96	1.30	0.75	23.65	15.27	3.27
2900.0	17.07	25.23	15.12	9.95	1.32	0.76	23.12	15.00	3.27
3000.0	16.98	25.14	14.65	9.62	1.30	0.76	22.96	14.85	3.14
3100.0	16.83	25.05	14.64	9.44	1.30	0.77	22.68	14.51	3.15
3200.0	16.69	25.13	14.38	9.33	1.31	0.78	22.24	14.29	3.19
3300.0	16.50	25.09	14.35	9.25	1.32	0.78	21.74	13.86	3.29
3400.0	16.33	25.09	14.16	9.14	1.32	0.79	21.84	13.63	3.24
3500.0	16.17	24.98	13.97	8.96	1.31	0.79	21.54	13.53	3.26
3600.0	16.06	25.08	13.37	8.90	1.32	0.81	21.23	13.08	3.30
3700.0	15.88	24.99	13.15	8.80	1.32	0.81	20.97	12.93	3.31
3800.0	15.72	24.93	12.94	8.69	1.32	0.82	20.98	12.64	3.32
3900.0	15.59	24.74	12.76	8.46	1.29	0.82	20.75	12.56	3.27
4000.0	15.37	24.89	12.83	8.57	1.34	0.83	20.56	12.27	3.24
4100.0	15.32	24.85	12.15	8.38	1.30	0.84	20.28	12.06	3.30
4200.0	15.12	24.60	12.09	8.20	1.28	0.84	20.31	11.81	3.25
4300.0	14.97	24.49	11.96	8.05	1.27	0.84	20.07	11.47	3.34
4400.0	14.81	24.47	11.81	7.88	1.27	0.84	19.93	11.38	3.35
4500.0	14.68	24.44	11.49	7.80	1.26	0.85	19.78	11.14	3.31
4600.0	14.46	24.39	11.70	7.83	1.29	0.85	19.70	10.85	3.30
4700.0	14.31	24.43	11.49	7.73	1.30	0.86	19.48	10.58	3.35
4800.0	14.15	24.13	11.21	7.45	1.25	0.85	19.43	10.60	3.37
4900.0	14.00	24.02	10.90	7.28	1.22	0.85	19.49	10.39	3.39
5000.0	13.78	23.92	10.92	7.19	1.23	0.85	19.39	10.35	3.39



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR
GVA-60+
12/18/2012

Page 5 of 9

MMIC Amplifier

GVA-60+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 85.23 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.27	25.49	17.31	9.01	1.03	0.49	--	19.87	2.66
30.0	20.62	24.04	24.36	10.93	1.02	0.46	37.38	20.69	3.27
50.0	20.46	23.83	27.31	11.54	1.03	0.46	36.41	20.92	3.17
70.0	20.42	23.90	29.39	11.64	1.04	0.48	36.53	20.88	3.11
90.0	20.39	23.82	30.59	11.68	1.03	0.47	36.51	20.91	3.15
100.0	20.38	23.84	30.55	11.69	1.04	0.47	36.11	20.92	3.17
200.0	20.32	23.85	29.09	11.71	1.04	0.48	35.84	21.13	3.07
300.0	20.30	23.87	29.33	12.12	1.05	0.49	36.22	21.15	3.27
400.0	20.27	23.90	28.77	12.45	1.05	0.50	36.16	21.03	3.29
500.0	20.23	23.91	26.47	12.52	1.05	0.51	35.92	21.02	3.32
600.0	20.17	23.95	25.04	12.50	1.06	0.52	35.95	20.95	3.28
700.0	20.11	24.01	23.71	12.47	1.07	0.53	36.22	20.89	3.26
800.0	20.03	24.04	22.55	12.48	1.07	0.53	35.86	20.83	3.23
900.0	19.95	24.13	21.74	12.51	1.08	0.55	35.35	20.93	3.20
1000.0	19.87	24.15	21.17	12.59	1.09	0.56	34.06	20.86	3.33
1200.0	19.69	24.29	19.75	12.72	1.11	0.58	34.26	20.43	3.32
1400.0	19.48	24.40	19.29	12.72	1.13	0.61	33.41	20.19	3.30
1500.0	19.37	24.47	19.03	12.66	1.14	0.62	32.28	19.94	3.29
1600.0	19.24	24.60	18.67	12.59	1.16	0.64	31.85	19.47	3.33
1800.0	19.02	24.68	18.45	12.24	1.18	0.65	30.74	19.05	3.34
2000.0	18.73	24.90	17.95	11.92	1.21	0.68	29.44	18.64	3.33
2100.0	18.61	24.97	17.89	11.65	1.22	0.69	28.89	18.21	3.36
2200.0	18.47	24.98	17.77	11.50	1.23	0.70	28.08	17.84	3.33
2300.0	18.34	25.00	17.66	11.25	1.24	0.70	27.81	17.66	3.37
2400.0	18.18	25.15	17.39	11.10	1.26	0.72	27.34	17.19	3.31
2500.0	18.05	25.15	17.17	10.85	1.26	0.72	27.17	17.11	3.63
2600.0	17.90	25.16	16.68	10.60	1.26	0.73	26.69	16.64	3.39
2700.0	17.73	25.26	16.28	10.41	1.28	0.74	26.09	16.35	3.44
2800.0	17.59	25.29	15.80	10.19	1.29	0.75	25.95	16.08	3.44
2900.0	17.42	25.33	15.62	10.15	1.30	0.76	25.37	15.78	3.45
3000.0	17.33	25.30	15.06	9.81	1.29	0.76	25.19	15.62	3.40
3100.0	17.20	25.19	15.07	9.60	1.28	0.76	24.87	15.26	3.37
3200.0	17.06	25.26	14.78	9.48	1.29	0.77	24.40	15.04	3.42
3300.0	16.89	25.21	14.79	9.39	1.29	0.78	23.93	14.58	3.47
3400.0	16.72	25.17	14.56	9.27	1.29	0.79	23.94	14.36	3.45
3500.0	16.58	25.07	14.33	9.07	1.28	0.79	23.62	14.24	3.45
3600.0	16.47	25.25	13.64	8.99	1.30	0.80	23.31	13.78	3.51
3700.0	16.31	25.13	13.46	8.88	1.29	0.81	23.03	13.62	3.53
3800.0	16.15	24.97	13.31	8.72	1.27	0.81	22.98	13.31	3.52
3900.0	16.04	24.83	13.03	8.50	1.25	0.81	22.73	13.22	3.51
4000.0	15.81	24.99	13.22	8.61	1.30	0.82	22.55	12.90	3.48
4100.0	15.77	24.97	12.41	8.41	1.27	0.83	22.21	12.71	3.50
4200.0	15.59	24.68	12.38	8.18	1.24	0.83	22.22	12.43	3.49
4300.0	15.44	24.60	12.18	8.05	1.23	0.83	21.93	12.09	3.54
4400.0	15.30	24.54	11.98	7.87	1.22	0.83	21.79	12.01	3.58
4500.0	15.16	24.54	11.69	7.76	1.22	0.84	21.60	11.74	3.57
4600.0	14.94	24.54	11.85	7.81	1.25	0.84	21.51	11.46	3.56
4700.0	14.80	24.46	11.67	7.68	1.24	0.84	21.25	11.17	3.62
4800.0	14.66	24.26	11.43	7.37	1.20	0.84	21.18	11.18	3.60
4900.0	14.52	24.14	11.02	7.19	1.17	0.84	21.19	10.96	3.63
5000.0	14.30	24.08	11.07	7.10	1.19	0.84	21.07	10.93	3.66



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

GVA-60+

12/18/2012

Page 6 of 9

MMIC Amplifier

GVA-60+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 95.9 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.01	25.19	14.75	8.03	1.02	0.43	--	19.15	3.76
30.0	20.38	24.41	20.79	10.46	1.05	0.50	42.26	20.40	4.41
50.0	20.22	24.45	22.70	11.14	1.07	0.53	41.19	20.79	4.39
70.0	20.18	24.20	24.13	11.38	1.06	0.52	41.46	20.60	4.34
90.0	20.16	24.23	25.05	11.54	1.07	0.52	40.93	20.64	4.34
100.0	20.15	24.24	25.27	11.62	1.07	0.53	39.65	20.62	4.38
200.0	20.10	24.19	26.34	11.97	1.07	0.53	39.73	20.85	4.29
300.0	20.05	24.19	25.14	11.91	1.08	0.54	39.46	20.78	4.56
400.0	20.00	24.29	23.61	11.81	1.08	0.55	38.53	20.49	4.52
500.0	19.94	24.31	22.46	11.74	1.09	0.55	37.47	20.48	4.59
600.0	19.88	24.37	21.80	11.74	1.10	0.56	36.56	20.35	4.51
700.0	19.81	24.40	21.18	11.77	1.10	0.57	35.66	20.23	4.56
800.0	19.74	24.44	20.46	11.85	1.11	0.58	35.17	20.10	4.51
900.0	19.65	24.50	19.72	11.87	1.12	0.59	34.75	20.24	4.51
1000.0	19.56	24.58	19.17	11.88	1.13	0.60	33.82	20.05	4.59
1200.0	19.36	24.73	18.33	11.90	1.15	0.63	32.74	19.43	4.61
1400.0	19.14	24.86	17.65	11.87	1.18	0.65	32.02	19.10	4.56
1500.0	19.02	24.94	17.42	11.83	1.19	0.66	31.38	18.86	4.60
1600.0	18.89	25.00	17.11	11.82	1.20	0.68	30.95	18.35	4.65
1800.0	18.63	25.06	16.82	11.62	1.22	0.70	30.32	17.77	4.67
2000.0	18.33	25.24	16.34	11.39	1.25	0.72	29.75	17.35	4.68
2100.0	18.19	25.21	16.18	11.16	1.26	0.73	29.20	16.88	4.66
2200.0	18.03	25.27	15.95	11.05	1.27	0.74	28.71	16.45	4.70
2300.0	17.88	25.21	15.70	10.84	1.27	0.75	28.67	16.19	4.73
2400.0	17.71	25.22	15.46	10.69	1.27	0.76	27.99	15.71	4.66
2500.0	17.54	25.27	15.21	10.54	1.29	0.77	27.89	15.58	4.77
2600.0	17.37	25.26	14.92	10.40	1.29	0.78	27.60	15.08	4.77
2700.0	17.20	25.21	14.64	10.19	1.29	0.78	27.15	14.80	4.85
2800.0	17.02	25.22	14.29	10.07	1.30	0.79	26.90	14.43	4.89
2900.0	16.82	25.17	14.14	10.00	1.30	0.80	26.55	14.13	4.86
3000.0	16.68	25.11	13.66	9.77	1.29	0.81	26.53	13.89	4.82
3100.0	16.50	25.03	13.50	9.62	1.29	0.81	26.20	13.51	4.78
3200.0	16.31	25.03	13.18	9.56	1.30	0.83	26.01	13.27	4.86
3300.0	16.12	24.95	13.01	9.42	1.30	0.83	25.37	12.82	4.95
3400.0	15.93	24.87	12.73	9.34	1.30	0.84	25.49	12.64	4.87
3500.0	15.74	24.74	12.60	9.17	1.29	0.84	25.40	12.44	4.92
3600.0	15.55	24.76	12.31	9.16	1.30	0.85	24.96	11.95	4.95
3700.0	15.36	24.68	12.20	9.05	1.31	0.86	24.84	11.75	4.96
3800.0	15.18	24.58	11.95	8.89	1.30	0.86	24.89	11.41	4.96
3900.0	15.00	24.44	11.77	8.74	1.29	0.87	24.61	11.25	4.95
4000.0	14.75	24.31	11.77	8.69	1.29	0.87	24.52	10.96	4.96
4100.0	14.57	24.45	11.56	8.66	1.32	0.88	24.55	10.82	5.03
4200.0	14.40	24.38	11.28	8.57	1.32	0.89	24.41	10.50	4.99
4300.0	14.17	24.15	11.20	8.45	1.31	0.89	24.24	10.19	5.06
4400.0	14.00	24.15	10.99	8.34	1.31	0.89	24.22	10.11	5.11
4500.0	13.82	24.28	10.88	8.36	1.35	0.90	24.12	9.81	5.14
4600.0	13.58	23.96	10.67	8.17	1.32	0.90	24.05	9.56	5.08
4700.0	13.39	23.92	10.50	8.06	1.32	0.90	23.85	9.25	5.14
4800.0	13.23	23.83	10.21	7.90	1.31	0.90	23.89	9.26	5.16
4900.0	13.05	23.89	10.00	7.91	1.33	0.91	24.09	9.04	5.20
5000.0	12.78	23.63	10.11	7.75	1.33	0.90	24.03	9.01	5.26



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

GVA-60+

12/18/2012

Page 7 of 9

MMIC Amplifier

GVA-60+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 85.76 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	20.99	25.96	14.78	8.27	1.06	0.51	--	18.73	3.69
30.0	20.35	24.46	20.49	10.39	1.05	0.50	39.63	19.82	4.26
50.0	20.19	24.32	22.12	11.07	1.07	0.52	38.91	20.11	4.27
70.0	20.15	24.18	23.51	11.27	1.06	0.51	39.03	20.01	4.25
90.0	20.13	24.15	24.40	11.43	1.06	0.52	39.23	20.03	4.24
100.0	20.12	24.12	24.57	11.50	1.06	0.52	38.34	20.03	4.27
200.0	20.07	24.15	25.58	11.85	1.07	0.53	38.81	20.23	4.16
300.0	20.02	24.17	24.60	11.82	1.08	0.53	38.26	20.19	4.49
400.0	19.97	24.18	23.17	11.70	1.08	0.54	37.50	19.97	4.41
500.0	19.90	24.27	22.13	11.63	1.09	0.55	37.00	19.96	4.43
600.0	19.84	24.32	21.48	11.64	1.09	0.56	35.85	19.85	4.42
700.0	19.77	24.38	20.93	11.69	1.10	0.57	35.14	19.77	4.46
800.0	19.69	24.41	20.23	11.76	1.11	0.58	34.62	19.66	4.43
900.0	19.60	24.48	19.55	11.77	1.12	0.59	34.50	19.82	4.43
1000.0	19.51	24.54	19.00	11.80	1.13	0.60	33.66	19.68	4.49
1200.0	19.31	24.68	18.21	11.82	1.15	0.62	32.46	19.11	4.45
1400.0	19.07	24.81	17.55	11.80	1.18	0.65	31.76	18.79	4.48
1500.0	18.96	24.84	17.33	11.76	1.19	0.66	31.23	18.54	4.50
1600.0	18.82	24.93	17.06	11.75	1.20	0.67	30.77	18.03	4.53
1800.0	18.56	25.04	16.76	11.56	1.23	0.70	30.02	17.47	4.55
2000.0	18.25	25.15	16.32	11.32	1.25	0.72	29.41	17.04	4.55
2100.0	18.12	25.14	16.16	11.08	1.25	0.73	28.78	16.56	4.55
2200.0	17.95	25.19	15.95	10.98	1.27	0.74	28.34	16.14	4.59
2300.0	17.81	25.19	15.71	10.78	1.27	0.75	28.29	15.88	4.61
2400.0	17.64	25.21	15.49	10.62	1.28	0.76	27.66	15.39	4.52
2500.0	17.47	25.17	15.24	10.48	1.28	0.76	27.52	15.26	4.60
2600.0	17.29	25.21	14.99	10.33	1.29	0.77	27.23	14.76	4.63
2700.0	17.13	25.18	14.73	10.13	1.29	0.78	26.73	14.46	4.72
2800.0	16.95	25.20	14.37	10.02	1.30	0.79	26.55	14.11	4.70
2900.0	16.76	25.14	14.22	9.94	1.31	0.80	26.10	13.81	4.72
3000.0	16.61	25.10	13.76	9.72	1.30	0.81	26.02	13.56	4.65
3100.0	16.44	24.99	13.62	9.57	1.29	0.81	25.78	13.19	4.63
3200.0	16.25	25.03	13.30	9.51	1.31	0.82	25.58	12.96	4.69
3300.0	16.06	24.84	13.13	9.37	1.30	0.83	24.89	12.49	4.79
3400.0	15.88	24.86	12.87	9.29	1.31	0.84	25.02	12.30	4.75
3500.0	15.69	24.70	12.74	9.11	1.29	0.84	24.93	12.10	4.76
3600.0	15.51	24.73	12.46	9.10	1.31	0.85	24.48	11.62	4.79
3700.0	15.32	24.68	12.34	9.01	1.31	0.85	24.36	11.40	4.82
3800.0	15.15	24.59	12.12	8.84	1.31	0.86	24.39	11.07	4.77
3900.0	14.97	24.42	11.93	8.68	1.29	0.86	24.13	10.93	4.80
4000.0	14.74	24.27	11.94	8.62	1.29	0.86	24.04	10.60	4.82
4100.0	14.55	24.40	11.72	8.58	1.32	0.87	24.03	10.46	4.87
4200.0	14.38	24.32	11.49	8.52	1.32	0.88	23.85	10.14	4.83
4300.0	14.17	24.12	11.39	8.38	1.31	0.88	23.74	9.85	4.91
4400.0	14.01	24.15	11.14	8.26	1.31	0.88	23.66	9.75	4.96
4500.0	13.82	24.31	11.06	8.30	1.36	0.89	23.60	9.45	4.94
4600.0	13.60	23.94	10.83	8.10	1.31	0.89	23.54	9.22	4.92
4700.0	13.41	23.87	10.67	7.98	1.32	0.89	23.32	8.87	4.97
4800.0	13.26	23.82	10.36	7.82	1.30	0.90	23.38	8.86	4.97
4900.0	13.08	23.91	10.17	7.86	1.33	0.91	23.55	8.65	5.00
5000.0	12.81	23.61	10.26	7.66	1.32	0.90	23.57	8.61	5.05



ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR

GVA-60+

12/18/2012

Page 8 of 9

MMIC Amplifier

GVA-60+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 107.84 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
10.0	21.06	25.97	15.20	8.29	1.05	0.51	--	19.35	3.93
30.0	20.41	24.45	21.18	10.55	1.05	0.50	42.43	20.68	4.60
50.0	20.25	24.44	23.30	11.25	1.07	0.53	42.82	21.21	4.50
70.0	20.21	24.25	24.68	11.47	1.06	0.52	41.64	20.91	4.46
90.0	20.19	24.21	25.71	11.62	1.07	0.52	41.85	20.95	4.50
100.0	20.18	24.24	25.98	11.71	1.07	0.53	40.48	20.93	4.49
200.0	20.13	24.18	27.15	12.05	1.07	0.53	40.68	21.22	4.40
300.0	20.09	24.24	25.71	12.02	1.08	0.54	39.49	21.13	4.71
400.0	20.03	24.32	23.97	11.89	1.08	0.55	39.22	20.78	4.66
500.0	19.97	24.35	22.79	11.83	1.09	0.55	37.23	20.75	4.74
600.0	19.92	24.36	22.08	11.83	1.09	0.56	36.06	20.58	4.66
700.0	19.85	24.45	21.41	11.87	1.10	0.57	35.48	20.44	4.66
800.0	19.78	24.52	20.64	11.93	1.11	0.58	34.83	20.30	4.64
900.0	19.69	24.55	19.87	11.93	1.12	0.59	34.72	20.48	4.71
1000.0	19.60	24.62	19.29	11.97	1.13	0.60	33.79	20.25	4.74
1200.0	19.42	24.76	18.39	11.98	1.15	0.62	32.72	19.60	4.72
1400.0	19.19	24.90	17.69	11.97	1.18	0.65	32.07	19.30	4.72
1500.0	19.08	24.93	17.44	11.92	1.19	0.66	31.57	19.07	4.72
1600.0	18.95	25.04	17.15	11.92	1.20	0.68	31.06	18.56	4.76
1800.0	18.70	25.16	16.80	11.72	1.23	0.70	30.36	17.98	4.77
2000.0	18.39	25.28	16.30	11.47	1.25	0.72	29.96	17.60	4.80
2100.0	18.26	25.24	16.15	11.25	1.25	0.73	29.35	17.13	4.85
2200.0	18.10	25.27	15.92	11.14	1.26	0.74	28.95	16.72	4.84
2300.0	17.95	25.34	15.61	10.94	1.27	0.75	28.95	16.45	4.91
2400.0	17.78	25.29	15.38	10.78	1.28	0.76	28.30	15.98	4.89
2500.0	17.60	25.32	15.11	10.63	1.28	0.77	28.20	15.86	4.91
2600.0	17.43	25.31	14.83	10.47	1.29	0.78	27.98	15.35	4.90
2700.0	17.26	25.22	14.53	10.28	1.28	0.79	27.48	15.09	5.00
2800.0	17.07	25.25	14.16	10.17	1.29	0.80	27.30	14.73	5.02
2900.0	16.87	25.19	13.99	10.10	1.30	0.81	26.97	14.44	5.04
3000.0	16.73	25.14	13.50	9.86	1.29	0.81	26.89	14.19	4.98
3100.0	16.54	25.02	13.34	9.71	1.28	0.82	26.57	13.84	4.94
3200.0	16.34	25.07	13.01	9.64	1.30	0.83	26.45	13.60	5.00
3300.0	16.15	24.95	12.83	9.50	1.29	0.84	25.81	13.14	5.11
3400.0	15.96	24.93	12.55	9.44	1.30	0.85	25.97	12.95	5.05
3500.0	15.76	24.70	12.42	9.26	1.28	0.85	25.87	12.77	5.08
3600.0	15.57	24.75	12.13	9.26	1.30	0.86	25.44	12.29	5.12
3700.0	15.36	24.66	12.00	9.14	1.30	0.87	25.35	12.07	5.16
3800.0	15.19	24.56	11.76	8.98	1.29	0.87	25.37	11.74	5.13
3900.0	14.99	24.41	11.56	8.85	1.28	0.87	25.13	11.61	5.15
4000.0	14.74	24.31	11.58	8.81	1.29	0.88	25.14	11.33	5.20
4100.0	14.55	24.42	11.36	8.78	1.32	0.89	25.02	11.19	5.22
4200.0	14.39	24.32	11.05	8.67	1.31	0.89	24.87	10.87	5.20
4300.0	14.14	24.09	10.98	8.55	1.30	0.89	24.74	10.56	5.29
4400.0	13.97	24.18	10.78	8.46	1.32	0.90	24.64	10.48	5.34
4500.0	13.78	24.29	10.66	8.47	1.36	0.91	24.57	10.19	5.33
4600.0	13.53	23.94	10.50	8.30	1.32	0.91	24.56	9.95	5.34
4700.0	13.34	23.90	10.31	8.19	1.33	0.91	24.39	9.62	5.34
4800.0	13.17	23.79	10.02	8.02	1.31	0.91	24.44	9.62	5.37
4900.0	12.98	23.86	9.82	8.03	1.34	0.92	24.56	9.42	5.44
5000.0	12.70	23.69	9.94	7.90	1.35	0.92	24.55	9.41	5.49



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site











The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com










IF/RF MICROWAVE COMPONENTS

REV. OR
GVA-60+
12/18/2012
Page 9 of 9

Typical Performance Curves

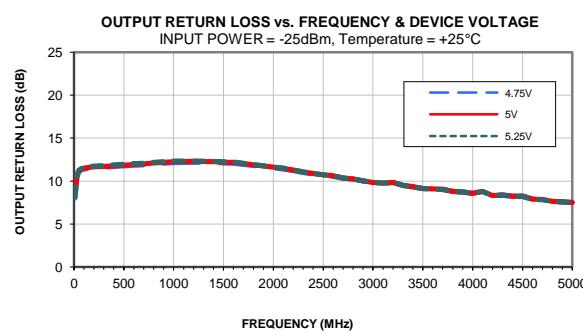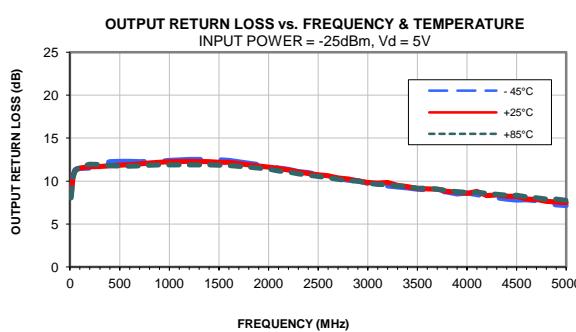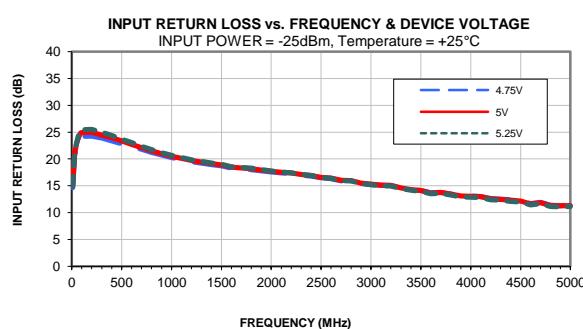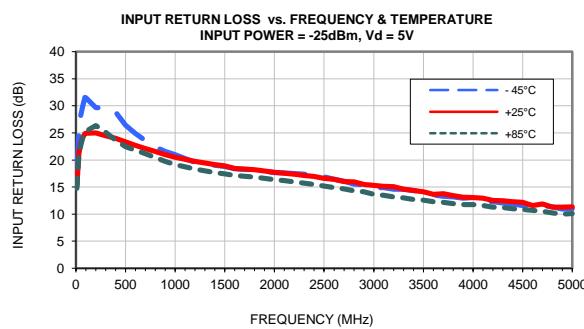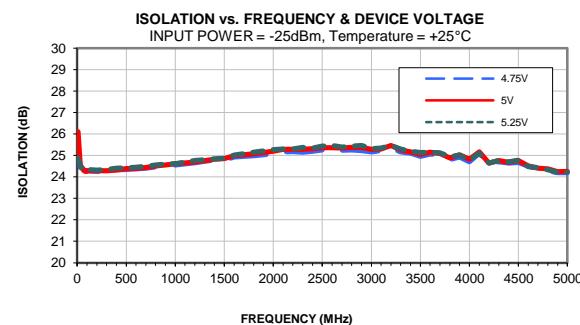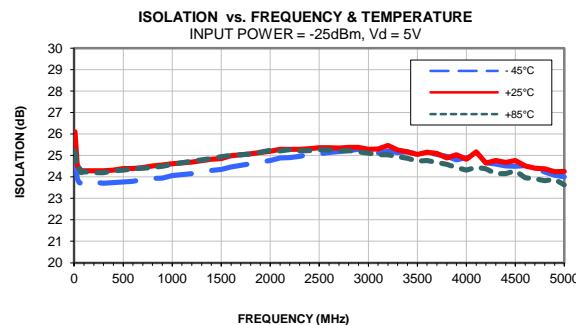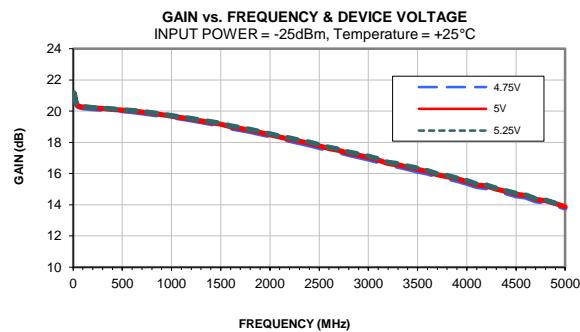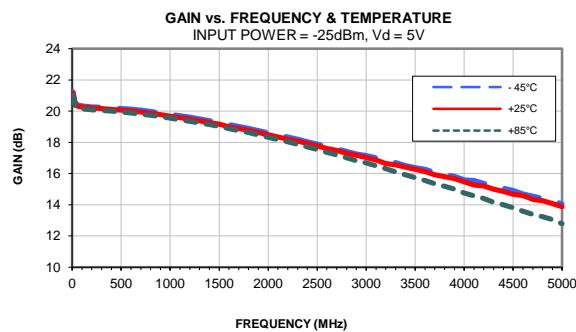

Typical Performance Curves

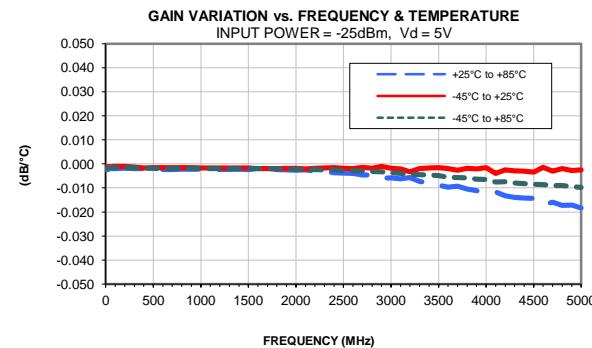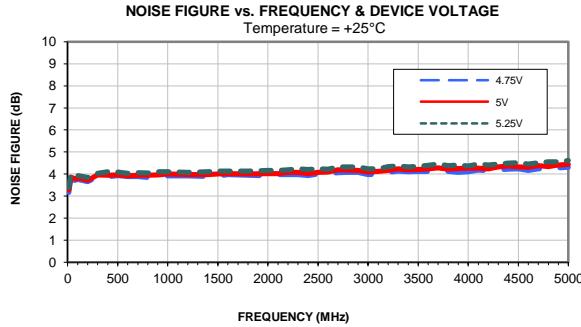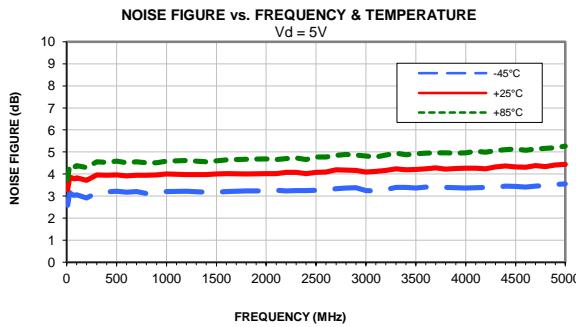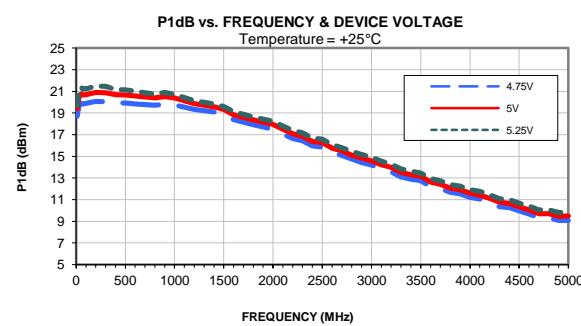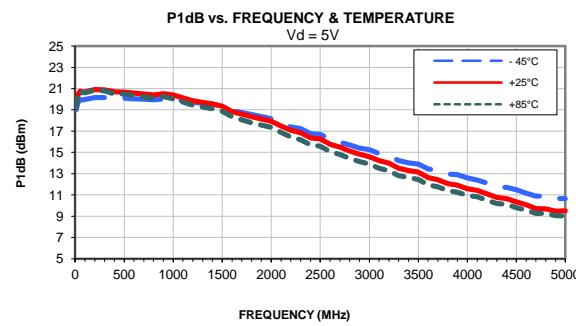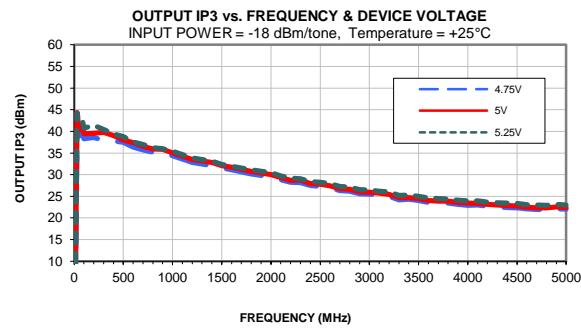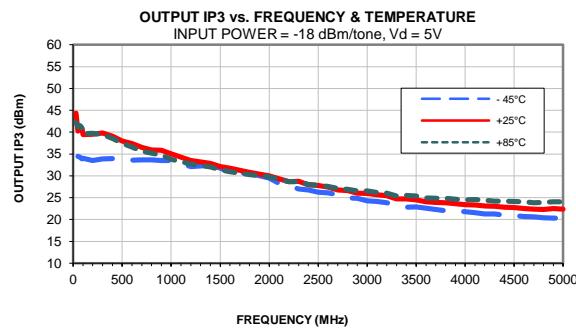


Case Style


DF

DF782

Outline Dimensions

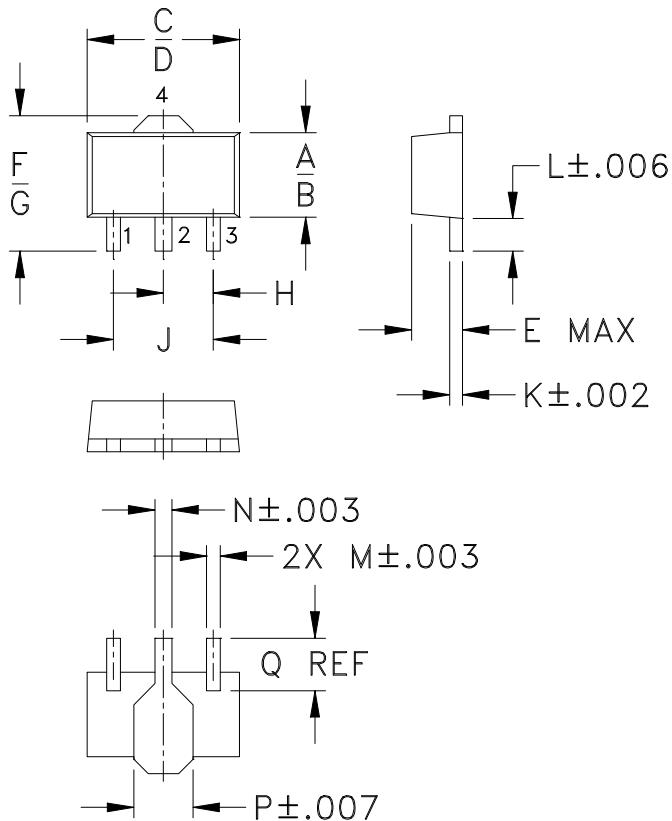

PCB Land Pattern

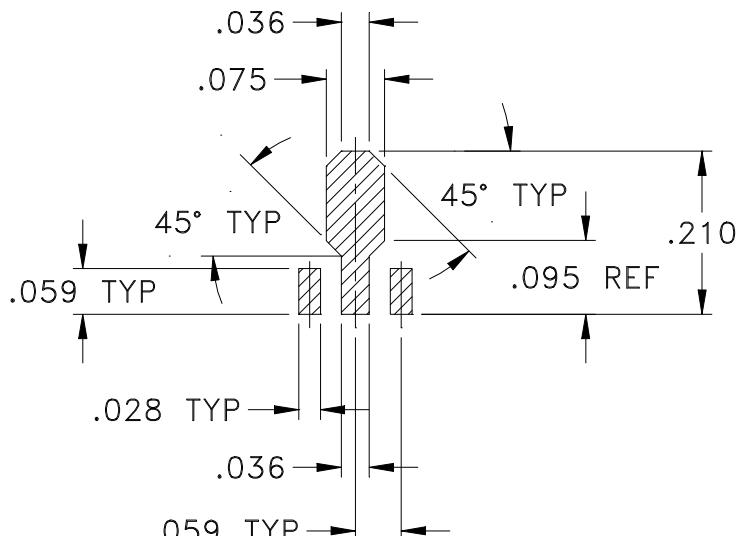

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. ±.01; 3Pl. ±.005

Notes:

1. Case material: Plastic.
2. Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

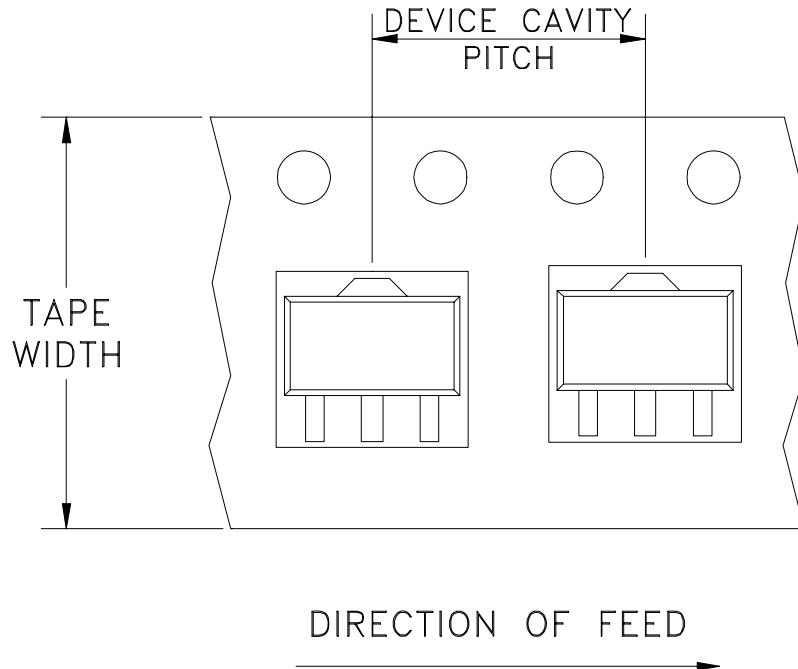

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
			50	50
			100	100
			200	200
			500	500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISI

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M108433	NEW RELEASE	11/14/06	PW	IG
A	M124803	"04AM03" WAS "mz", MODIFIED TB IN TITLE	10/23/09	MMG	DJ


SUGGESTED MOUNTING CONFIGURATION
FOR DF782 CASE STYLE, "04AM03" PIN CONNECTION

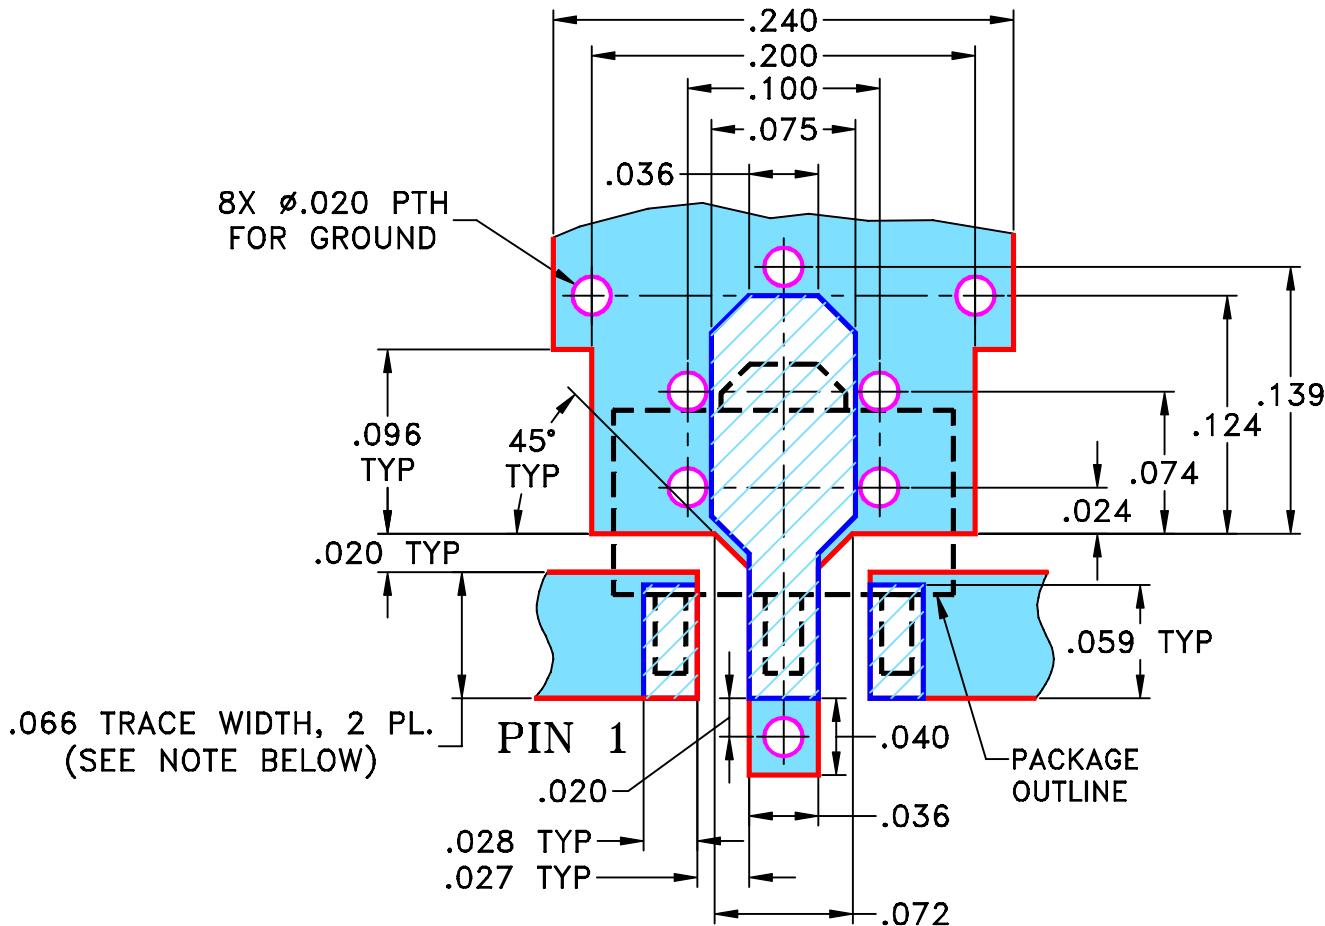

- NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

PW

11/14/06

TOLERANCES ON:

CHECKED

IL

11/14/06

2 PL DECIMALS ± .005

APPROVED

IG

11/14/06

ANGLES ±



FRACTIONS ±



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235


PL, 04AM03, DF782, GVA, TB-410-XX+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-255	A
FILE:	98PL255	SCALE: 10:1	SHEET: 1 OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

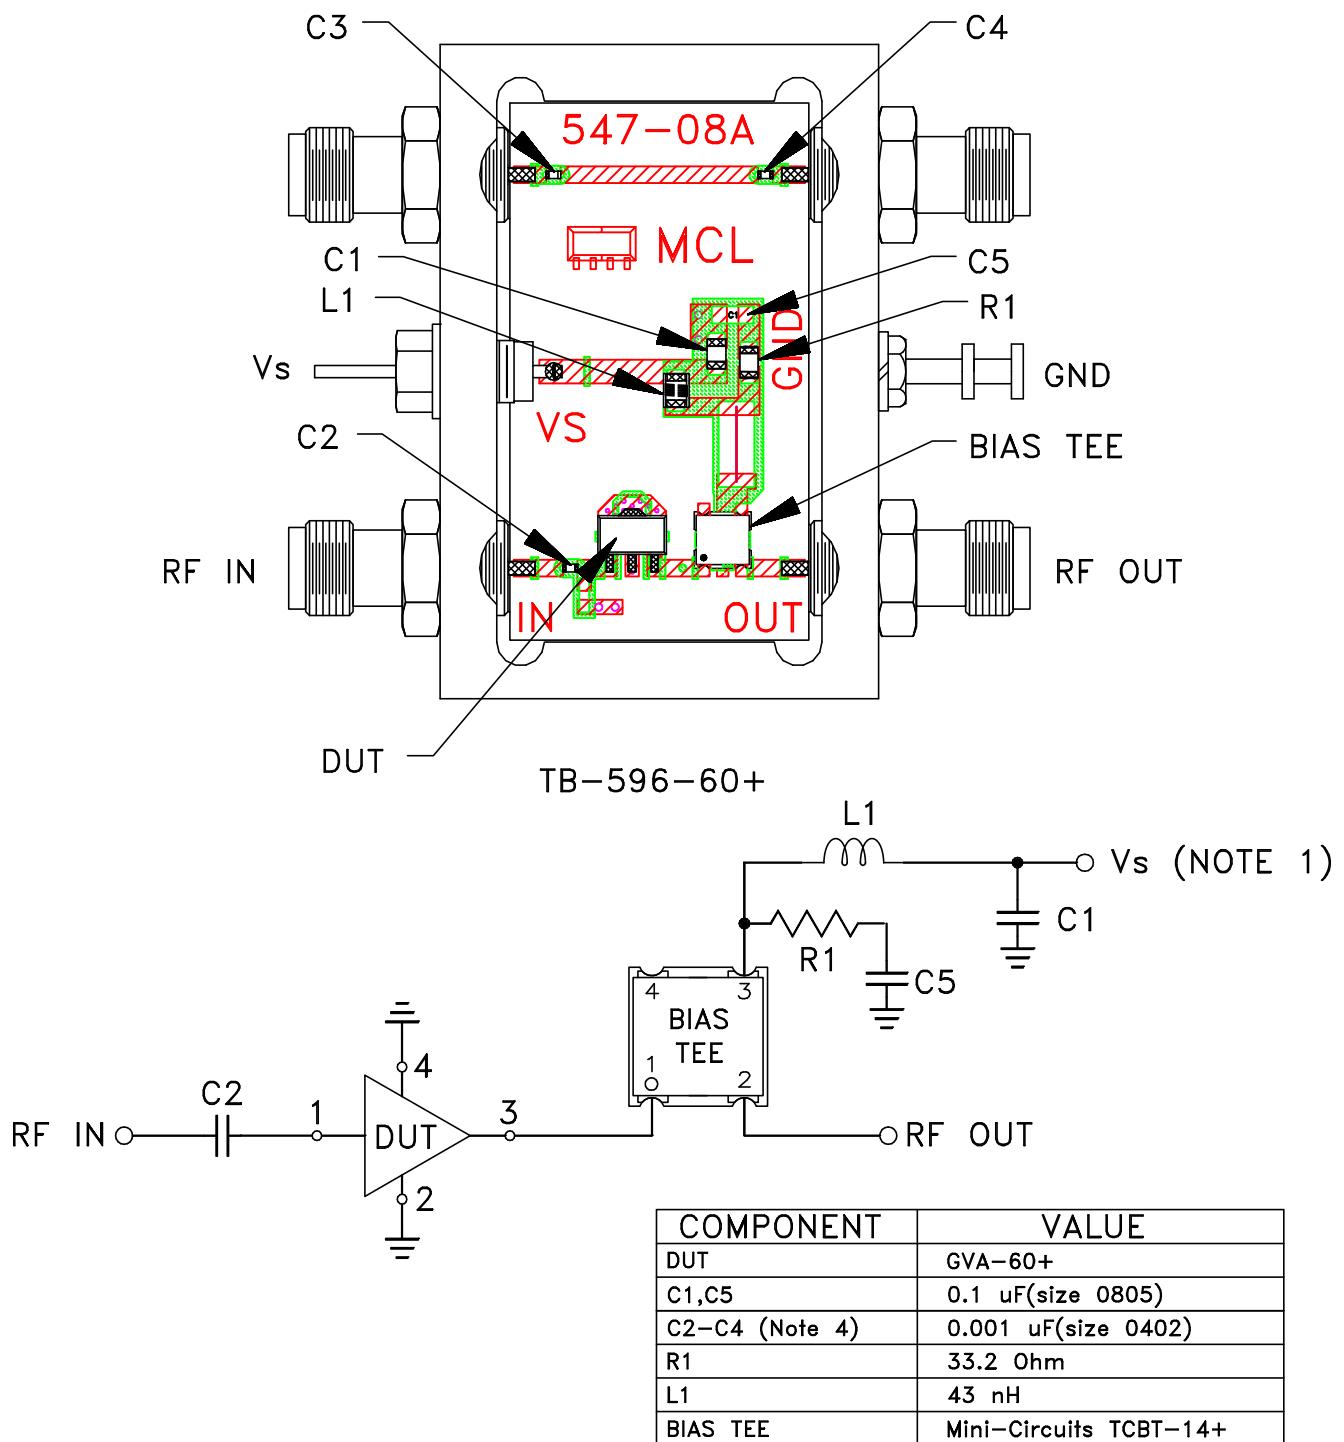

NOTES:

Schematic Diagram

1. Vs voltage: $+5 \pm 0.2\text{V}$.
2. SMA Female connectors.
3. PCB material: Rogers RO4350 or equivalent, dielectric constant=3.5, dielectric thickness=.020 inch.
4. Capacitor C2-C4 should be free of resonance up to the highest frequency specified.

 Mini-Circuits®



Environmental Specifications

ENV08T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C or -45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	