



## TEST ACCESSORY

# Heatsink

## HSK-2425-250+

### THE BIG DEAL

- Accessory for amplifier ZHL-2425-250X+
- Contains screw holes located at the same coordinates as the ZHL-2425-250X+
- Easy to attach

### APPLICATIONS

- Heat sink designed for air cooling applications

### PRODUCT OVERVIEW

Mini-Circuits' model HSK-2425-250+ is a custom heatsink designed for high-power amplifier ZHL-2425-250X+. It comes ready for use with appropriate screw holes and it is easy to attach to the power amplifier.



Model No.	HSK-2425-250+
Case Style	VK3236


#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### MAXIMUM RATINGS

Parameters	Ratings
Operating Temperature	0°C to 65°C
Storage Temperature	-20°C to 85°C

### OUTLINE DRAWING

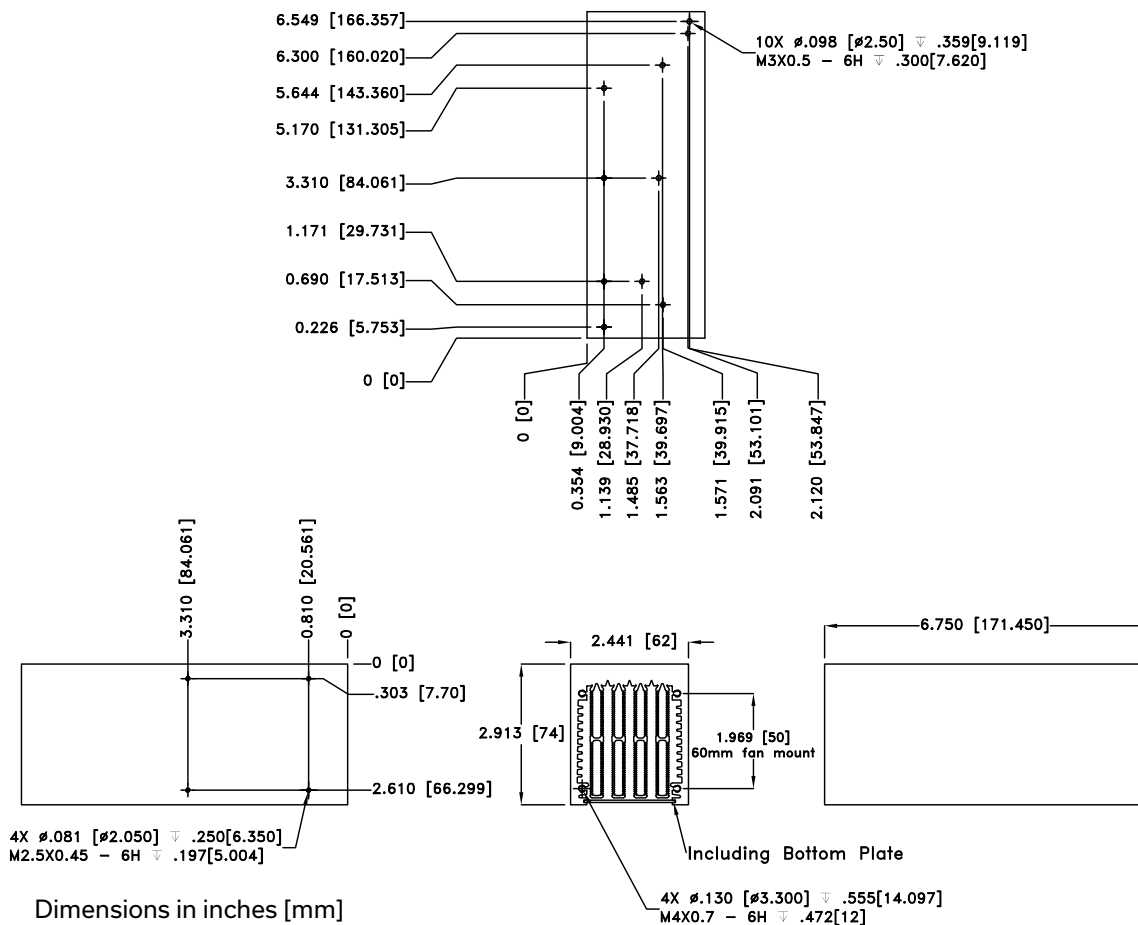

### Outline Dimensions

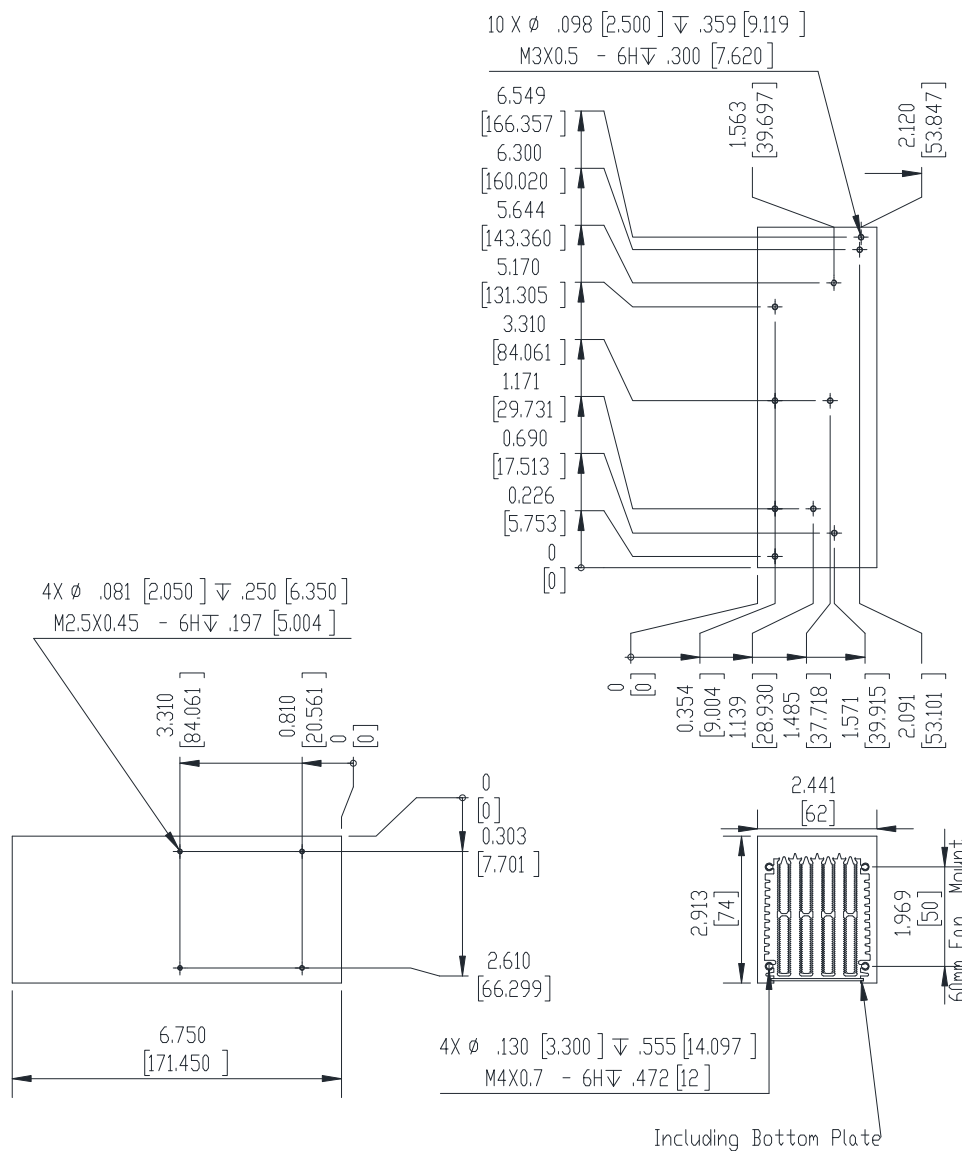

Weight: 827.85 grams

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$  (0.254); 3 Pl.  $\pm .005$  (0.127)

#### Notes:

1. Case material: EN-AW 6060-T66(AlMgSi)
2. Finish: Black anodized SA



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	0° to 65° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 85° C Ambient Environment	Individual Model Data Sheet