

Ultra High IP3 Amplifier Module

HXG-242-4+

50Ω 0.7 to 2.4 GHz



Ceramic Package

The Big Deal

- Industry leading High IP3, 46 dBm typ.
- Integrated optimization circuits
- Linearity with low current consumption

LTE Performance

Product Overview

The HXG-242-4+ (RoHS compliant) is an advanced amplifier module combining high dynamic range MMIC technology and optimization circuits to provide industry leading linearity over a focused frequency range. It is packaged in a Mini-Circuits System in Package (MSiP) module (6.4mm x 7.0mm x 2.4mm) using a sealed ceramic cover and having gold over Ni for excellent solderability.

Key Features

Feature	Advantages
Optimized Frequency Range	Covering primary wireless communications bands: Cellular, PCS, LTE
Extremely High IP3 vs. Current 46.6 dBm typ at 1500 MHz versus DC Power Consumption of 146mA	The HXG-242-4+ offers industry leading IP3 performance relative to device size and power consumption. The combination of the design and E-PHEMT provides enhanced linearity as evidence in the IP3. This feature makes this amplifier ideal for use in: <ul style="list-style-type: none"> • Driver amplifiers for complex waveform up converter paths • Drivers in linearized transmit systems • Secondary amplifiers in ultra High Dynamic range receivers
No External Matching Components Required	Unlike competing products, Mini-Circuits HXG-242-4+ provides Input and Output Return Loss of 10 dB up to 1.5 GHz without the need for any external matching components
Low Noise Figure: 2.4dB typ.	A unique feature of the HXG-242-4+ which separates this design from all competitors is the low noise figure performance in combination with the high dynamic range.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ultra High IP3 Amplifier Module 0.7-2.4 GHz

Product Features

- Ultra High IP3, +46 dBm typ. at 1.5 GHz
- Gain, 14.3 dB typ. at 2 GHz
- High Pout, P1dB +23 dBm typ.
- Low noise figure, 2.4 dB
- Internally matched for optimized IP3 performance
- No external matching components required



HXG-242-4+

CASE STYLE: LZ1671

Typical Applications

- Base station infrastructure
- Portable Wireless
- LTE

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

LTE Performance

General Description

The HXG-242-4+ (RoHS compliant) is an advanced amplifier module in a Mini-Circuits System in Package (MSIP) which includes internal matching networks to offer extremely high dynamic range module. It is housed in a ceramic package 6.4mm x 7.0mm x 2.4mm.

simplified schematic and pin description

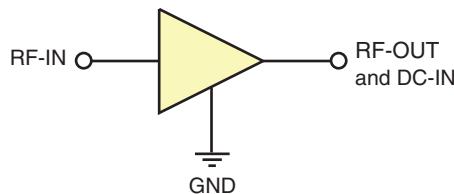

Function	Pin Number	Description
RF IN	2	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	5	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit", Fig. 2
GND	1,3,4,6	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Electrical Specifications⁽¹⁾ at 25°C and 5V, unless noted

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.7		2.4	GHz
Gain	0.7	—	16.0	—	dB
	0.9	—	15.9	—	
	1.2	—	15.3	—	
	1.5	—	14.9	—	
	1.8	13.0	14.4	15.8	
	2.1	—	14.0	—	
	2.4	—	13.6	—	
Input Return Loss	0.7		17.5		dB
	0.9		15.8		
	1.2		13.7		
	1.5		11.6		
	1.8		9.7		
	2.1		7.8		
	2.4		6.3		
Output Return Loss	0.7		19.1		dB
	0.9		18.8		
	1.2		18.2		
	1.5		17.9		
	1.8		16.5		
	2.1		14.7		
	2.4		12.5		
Reverse Isolation	2.0		20.0		dB
Output Power @ 1 dB compression	0.7		22.2		dBm
	0.9		22.3		
	1.2		22.6		
	1.5		22.9		
	1.8		23.0		
	2.1		23.2		
	2.4		23.3		
Output IP3	0.7	—	41.3	—	dBm
	0.9	—	41.7	—	
	1.2	—	44.2	—	
	1.5	42.0	45.7	—	
	1.8	42.0	44.4	—	
	2.1	—	45.0	—	
	2.4	—	42.9	—	
Noise Figure	0.7		2.2		dB
	0.9		2.3		
	1.2		2.3		
	1.5		2.3		
	1.8		2.4		
	2.1		2.5		
	2.4		2.5		
Device Operating Voltage (V_d)		4.8	5.0	5.2	V
Device Operating Current		110	140	180	mA
Device Current Variation vs. Temperature ⁽²⁾			+14		µA/°C
Device Current Variation vs Voltage			0.05		mA/mV
Thermal Resistance, junction-to-ground lead			85		°C/W

⁽¹⁾ Measured on Mini-Circuits Characterization test board TB-640+. See Characterization Test Circuit (Fig.1)⁽²⁾ Current at 85°C — Current at -45°C)/130**Absolute Maximum Ratings**

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Operating Current at 5V	210 mA
Power Dissipation	1 W
Input Power (CW)	24 dBm
DC Voltage on Pin 3	6 V

Note:


Permanent damage may occur if any of these limits are exceeded.

Electrical maximum ratings are not intended for continuous normal operation.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

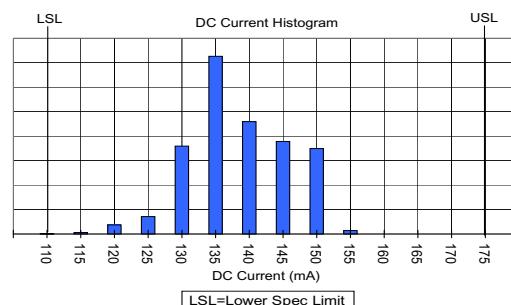C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Characterization Test Circuit

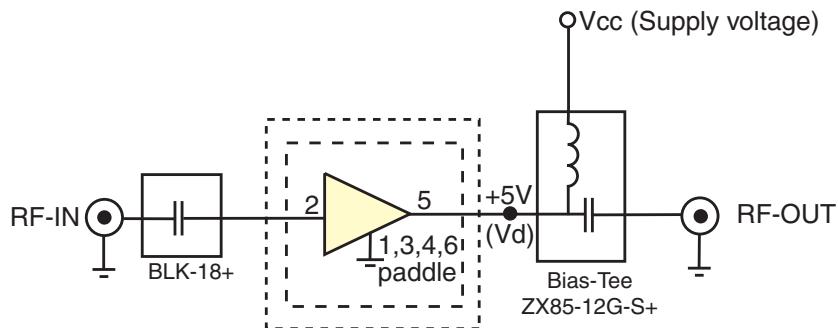


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-640+) Gain, Return loss, Output power at 1dB compression (P1 dB) , output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: Pin= -25dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 5 dBm/tone at output.

Recommended Application Circuit


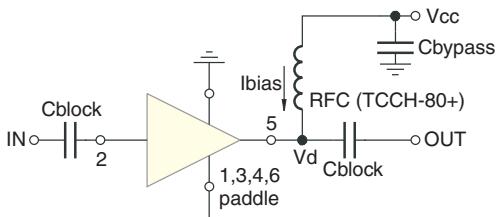


Fig 2. Test Board includes case, connectors, and components soldered to PCB

Product Marking



Markings in addition to model number designation may appear for internal quality control purposes.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Additional Detailed Technical Information*additional information is available on our dash board.*

Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	LZ1671 Ceramic package, exposed paddle, lead finish: gold plating over nickel
Tape & Reel Standard quantities available on reel	F78 7" reels with 20, 50, 100, 200 and 13" with 500, or 1K devices.
Suggested Layout for PCB Design	PL-350
Evaluation Board	TB-641-242+
Environmental Ratings	ENV-59

ESD Rating

Human Body Model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD STM 5.1-2001

Machine Model (MM): Class M1 (<100V) in accordance with ANSI/ESD STM 5.2-1999 passes 25V

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



*Typical Performance Data***NOTE: Use PDF Bookmarks to view DATA at required conditions****Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.00V, Id = 145.16mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
500.0	16.33	20.73	18.07	18.73	1.12	0.66	41.42	22.87	1.89
600.0	16.18	20.70	18.27	18.17	1.13	0.67	41.36	22.81	1.99
700.0	16.10	20.63	17.34	17.08	1.12	0.67	40.74	22.74	1.95
800.0	15.97	20.57	16.84	16.20	1.13	0.68	43.11	22.97	2.06
900.0	15.83	20.50	16.37	16.08	1.13	0.69	41.52	22.82	2.05
1000.0	15.75	20.46	15.59	15.41	1.11	0.69	43.22	23.10	2.14
1050.0	15.66	20.46	15.75	14.97	1.13	0.70	43.58	23.05	2.15
1100.0	15.60	20.33	15.21	14.59	1.12	0.70	45.68	23.19	2.09
1150.0	15.57	20.30	14.64	14.29	1.13	0.71	43.97	23.17	2.18
1200.0	15.45	20.27	14.61	14.35	1.12	0.71	44.67	23.05	2.15
1250.0	15.45	20.25	14.11	13.84	1.12	0.71	44.67	23.07	2.17
1300.0	15.35	20.23	14.18	13.91	1.12	0.72	43.46	23.06	2.19
1350.0	15.25	20.21	13.99	13.78	1.12	0.72	45.57	23.16	2.18
1400.0	15.20	20.10	13.46	13.33	1.12	0.72	47.25	23.27	2.22
1450.0	15.12	20.02	13.14	13.32	1.12	0.73	46.61	23.42	2.26
1500.0	15.06	20.06	13.00	13.38	1.12	0.73	44.72	23.40	2.28
1550.0	15.03	19.95	12.65	13.05	1.11	0.73	45.54	23.24	2.26
1600.0	14.94	19.91	12.40	12.90	1.12	0.75	50.85	23.54	2.26
1650.0	14.82	19.91	12.13	12.74	1.11	0.75	47.38	23.58	2.31
1700.0	14.75	19.86	12.24	12.88	1.11	0.75	49.71	23.54	2.23
1750.0	14.67	19.79	11.87	12.69	1.11	0.76	45.40	23.48	2.15
1800.0	14.66	19.74	11.42	12.57	1.12	0.76	45.25	23.39	2.35
1850.0	14.65	19.67	11.14	12.49	1.11	0.76	46.27	23.71	2.29
1900.0	14.49	19.58	11.01	12.68	1.11	0.77	45.80	23.63	2.24
1950.0	14.40	19.57	10.90	12.63	1.11	0.78	46.10	23.74	2.49
2000.0	14.40	19.55	10.54	12.66	1.10	0.79	48.53	23.64	2.39
2050.0	14.25	19.50	10.57	12.81	1.09	0.79	48.46	23.59	2.35
2100.0	14.22	19.39	10.13	12.28	1.10	0.79	49.53	23.79	2.35
2150.0	14.11	19.39	9.95	12.68	1.10	0.81	49.03	23.73	2.37
2200.0	14.07	19.29	9.67	12.62	1.09	0.81	47.11	23.83	2.37
2250.0	14.01	19.20	9.47	12.38	1.08	0.81	46.55	23.83	2.42
2300.0	13.94	19.11	9.09	12.84	1.09	0.82	45.11	23.90	2.43
2350.0	13.89	19.15	8.91	12.85	1.08	0.82	46.73	23.99	2.29
2400.0	13.81	19.05	8.52	12.81	1.07	0.83	48.48	23.85	2.38
2500.0	13.71	18.94	8.16	12.87	1.06	0.84	47.08	23.90	2.53
2600.0	13.54	18.84	7.74	13.06	1.05	0.85	46.52	23.87	2.51
2700.0	13.44	18.74	7.21	13.46	1.02	0.86	46.21	23.88	2.63
2800.0	13.30	18.68	6.74	13.21	0.99	0.88	44.81	23.85	2.68
2900.0	13.19	18.48	6.27	13.57	0.97	0.89	47.87	23.70	2.68
3000.0	13.04	18.43	5.73	13.58	0.94	0.90	45.38	23.70	2.78



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 133.07mA @ Temperature = +25degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
500.0	16.22	20.66	18.17	18.65	1.12	0.66	42.98	22.33	1.89
600.0	16.09	20.64	18.39	18.16	1.12	0.67	42.46	22.29	1.98
700.0	16.00	20.53	17.46	16.92	1.12	0.67	41.42	22.21	1.95
800.0	15.87	20.49	16.95	16.36	1.13	0.68	42.95	22.44	2.02
900.0	15.74	20.44	16.50	15.71	1.13	0.69	41.50	22.30	2.02
1000.0	15.66	20.38	15.66	15.06	1.12	0.69	43.06	22.55	2.09
1050.0	15.55	20.37	15.84	14.89	1.13	0.70	42.36	22.51	2.13
1100.0	15.49	20.24	15.28	14.67	1.12	0.70	42.40	22.65	2.07
1150.0	15.46	20.22	14.70	14.30	1.13	0.71	42.25	22.62	2.17
1200.0	15.36	20.17	14.70	14.25	1.12	0.71	42.30	22.52	2.17
1250.0	15.35	20.17	14.18	13.65	1.13	0.72	41.96	22.51	2.12
1300.0	15.25	20.13	14.24	13.77	1.12	0.72	41.55	22.51	2.15
1350.0	15.15	20.12	14.07	13.87	1.12	0.72	42.38	22.60	2.13
1400.0	15.11	20.00	13.53	13.38	1.12	0.72	42.56	22.71	2.17
1450.0	15.03	19.95	13.23	13.10	1.12	0.73	42.27	22.83	2.23
1500.0	14.96	19.95	13.07	13.07	1.12	0.74	41.51	22.82	2.30
1550.0	14.93	19.85	12.73	12.68	1.11	0.73	42.33	22.67	2.23
1600.0	14.85	19.83	12.49	12.92	1.12	0.74	43.50	22.94	2.30
1650.0	14.73	19.78	12.20	12.79	1.11	0.75	43.57	22.99	2.28
1700.0	14.65	19.77	12.33	12.83	1.11	0.75	42.80	22.96	2.19
1750.0	14.58	19.70	11.94	12.93	1.11	0.76	41.56	22.89	2.10
1800.0	14.56	19.61	11.50	12.59	1.12	0.77	42.01	22.83	2.31
1850.0	14.54	19.56	11.22	12.57	1.11	0.77	42.04	23.08	2.24
1900.0	14.41	19.48	11.08	12.56	1.11	0.77	42.34	23.02	2.23
1950.0	14.30	19.45	10.97	12.50	1.11	0.78	40.93	23.14	2.40
2000.0	14.30	19.44	10.61	12.58	1.10	0.79	43.01	23.04	2.35
2050.0	14.17	19.42	10.61	12.75	1.09	0.79	42.48	22.99	2.32
2100.0	14.14	19.26	10.18	12.56	1.10	0.79	42.32	23.17	2.34
2150.0	14.02	19.30	10.01	12.74	1.10	0.80	42.42	23.10	2.33
2200.0	13.98	19.17	9.74	12.64	1.09	0.80	42.81	23.21	2.33
2250.0	13.92	19.11	9.54	12.63	1.08	0.81	41.61	23.20	2.40
2300.0	13.84	19.00	9.15	12.66	1.09	0.82	41.55	23.26	2.38
2350.0	13.81	19.03	8.96	13.06	1.08	0.82	42.32	23.35	2.31
2400.0	13.72	18.94	8.58	12.92	1.07	0.83	42.37	23.21	2.31
2500.0	13.63	18.81	8.21	13.01	1.06	0.84	42.00	23.24	2.46
2600.0	13.46	18.70	7.78	13.37	1.05	0.85	42.14	23.26	2.53
2700.0	13.37	18.63	7.25	13.44	1.02	0.86	41.47	23.26	2.55
2800.0	13.22	18.55	6.77	13.55	0.99	0.88	41.72	23.21	2.64
2900.0	13.11	18.38	6.31	13.90	0.97	0.88	42.75	23.12	2.62
3000.0	12.97	18.32	5.75	13.96	0.94	0.90	42.58	23.08	2.74

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 158.18mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
500.0	16.40	20.81	17.95	18.60	1.12	0.66	40.77	23.33	1.98
600.0	16.26	20.78	18.14	18.65	1.13	0.67	41.41	23.28	2.03
700.0	16.18	20.72	17.27	17.11	1.12	0.67	40.69	23.22	1.97
800.0	16.04	20.64	16.74	16.60	1.13	0.68	42.05	23.46	2.07
900.0	15.92	20.57	16.31	15.93	1.13	0.69	41.21	23.30	2.08
1000.0	15.84	20.54	15.51	15.23	1.12	0.69	42.29	23.60	2.17
1050.0	15.73	20.58	15.68	15.41	1.13	0.70	43.09	23.53	2.17
1100.0	15.67	20.40	15.15	14.56	1.12	0.70	44.29	23.71	2.12
1150.0	15.64	20.39	14.56	14.53	1.13	0.71	44.40	23.67	2.19
1200.0	15.52	20.36	14.55	14.15	1.12	0.71	43.29	23.56	2.23
1250.0	15.53	20.34	14.05	14.04	1.13	0.72	44.27	23.58	2.18
1300.0	15.42	20.31	14.09	13.86	1.12	0.72	43.18	23.55	2.22
1350.0	15.32	20.29	13.93	13.90	1.12	0.72	44.14	23.69	2.19
1400.0	15.27	20.18	13.39	13.47	1.12	0.72	45.07	23.80	2.24
1450.0	15.19	20.09	13.08	13.28	1.11	0.73	47.90	23.95	2.29
1500.0	15.12	20.13	12.95	13.51	1.12	0.74	48.80	23.93	2.31
1550.0	15.11	20.03	12.61	12.93	1.11	0.73	44.36	23.75	2.31
1600.0	15.01	19.97	12.35	12.93	1.12	0.75	46.66	24.08	2.35
1650.0	14.89	19.93	12.08	12.82	1.11	0.74	45.93	24.11	2.35
1700.0	14.82	19.92	12.19	12.80	1.11	0.75	48.49	24.08	2.29
1750.0	14.76	19.87	11.80	12.85	1.11	0.76	45.58	24.00	2.17
1800.0	14.73	19.80	11.39	12.56	1.12	0.77	45.69	23.92	2.38
1850.0	14.71	19.73	11.10	12.28	1.11	0.77	47.63	24.25	2.32
1900.0	14.57	19.63	10.95	12.36	1.11	0.77	48.02	24.18	2.29
1950.0	14.47	19.62	10.86	12.54	1.11	0.78	50.45	24.28	2.48
2000.0	14.46	19.62	10.49	12.68	1.10	0.79	45.17	24.15	2.42
2050.0	14.32	19.60	10.50	12.67	1.10	0.79	46.30	24.11	2.39
2100.0	14.30	19.43	10.07	12.24	1.10	0.79	48.02	24.35	2.38
2150.0	14.18	19.47	9.92	12.74	1.10	0.80	46.74	24.27	2.36
2200.0	14.12	19.33	9.62	12.47	1.09	0.81	47.90	24.38	2.42
2250.0	14.08	19.26	9.43	12.47	1.08	0.81	48.59	24.39	2.46
2300.0	13.98	19.21	9.06	12.66	1.09	0.82	45.59	24.51	2.47
2350.0	13.96	19.21	8.87	12.72	1.08	0.82	46.98	24.56	2.32
2400.0	13.87	19.10	8.50	12.58	1.07	0.83	45.58	24.40	2.41
2500.0	13.77	19.01	8.13	12.88	1.06	0.84	45.52	24.46	2.54
2600.0	13.61	18.91	7.71	13.06	1.04	0.85	46.97	24.41	2.60
2700.0	13.49	18.79	7.19	13.18	1.02	0.86	43.56	24.43	2.68
2800.0	13.37	18.76	6.71	13.40	0.99	0.88	42.71	24.40	2.69
2900.0	13.24	18.56	6.25	13.37	0.97	0.88	43.27	24.23	2.71
3000.0	13.09	18.52	5.72	13.63	0.94	0.90	42.49	24.24	2.82



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

HXG-242-4+

7/14/2017

Page 3 of 9

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.00V, Id = 146.26mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
500.0	15.79	20.20	20.85	17.72	1.12	0.64	38.35	22.93	1.63
600.0	15.66	20.17	21.10	17.87	1.13	0.66	38.15	22.90	1.84
700.0	15.60	20.12	19.85	17.36	1.13	0.65	38.02	22.87	1.64
800.0	15.51	20.04	19.60	16.63	1.13	0.66	38.83	23.05	1.77
900.0	15.41	20.01	19.10	16.58	1.13	0.66	37.88	22.93	1.75
1000.0	15.34	19.98	18.09	16.22	1.13	0.67	39.50	23.13	1.83
1050.0	15.26	20.01	18.30	15.94	1.14	0.68	39.01	23.10	1.87
1100.0	15.22	19.89	17.64	15.31	1.13	0.67	40.32	23.21	1.78
1150.0	15.21	19.86	17.01	15.04	1.13	0.68	40.20	23.19	1.85
1200.0	15.11	19.87	17.06	15.16	1.13	0.69	39.89	23.09	1.90
1250.0	15.12	19.83	16.42	14.70	1.13	0.69	39.99	23.08	1.86
1300.0	15.03	19.81	16.57	14.83	1.13	0.69	39.41	23.11	1.90
1350.0	14.95	19.78	16.30	15.04	1.13	0.69	40.34	23.19	1.87
1400.0	14.91	19.67	15.64	14.72	1.13	0.70	40.59	23.29	1.92
1450.0	14.85	19.64	15.28	14.54	1.13	0.70	42.23	23.39	1.92
1500.0	14.80	19.67	15.08	14.45	1.13	0.71	41.26	23.39	1.99
1550.0	14.80	19.57	14.76	14.04	1.12	0.70	40.53	23.25	1.94
1600.0	14.72	19.54	14.47	13.98	1.13	0.72	42.03	23.52	1.96
1650.0	14.61	19.50	14.17	14.16	1.12	0.71	41.89	23.55	2.01
1700.0	14.56	19.49	14.31	14.15	1.12	0.72	42.55	23.53	1.91
1750.0	14.50	19.45	13.79	14.19	1.12	0.72	41.11	23.44	1.83
1800.0	14.49	19.39	13.23	14.04	1.13	0.73	41.19	23.38	2.03
1850.0	14.48	19.34	12.87	14.06	1.12	0.74	43.68	23.65	1.91
1900.0	14.35	19.23	12.72	13.97	1.12	0.74	43.66	23.59	1.96
1950.0	14.26	19.24	12.59	13.86	1.12	0.75	43.90	23.70	2.09
2000.0	14.28	19.27	12.11	14.04	1.12	0.76	42.57	23.64	2.01
2050.0	14.13	19.22	12.15	13.98	1.11	0.75	42.75	23.59	2.03
2100.0	14.14	19.13	11.63	13.87	1.11	0.76	43.29	23.78	1.99
2150.0	14.02	19.13	11.40	13.90	1.11	0.77	44.04	23.70	1.95
2200.0	13.99	18.99	11.07	14.10	1.10	0.77	42.77	23.81	2.03
2250.0	13.94	18.97	10.82	13.97	1.09	0.77	46.84	23.81	2.05
2300.0	13.85	18.87	10.36	13.92	1.10	0.78	46.89	23.82	2.02
2350.0	13.84	18.88	10.13	14.04	1.09	0.78	44.75	23.93	1.93
2400.0	13.75	18.82	9.67	13.98	1.08	0.79	43.67	23.84	1.99
2500.0	13.67	18.72	9.25	14.04	1.07	0.80	47.15	23.86	2.14
2600.0	13.51	18.66	8.74	14.34	1.06	0.80	45.48	23.91	2.17
2700.0	13.41	18.55	8.13	14.28	1.03	0.81	48.14	23.93	2.22
2800.0	13.30	18.53	7.53	14.01	1.00	0.83	47.96	23.93	2.26
2900.0	13.19	18.34	7.02	13.89	0.98	0.83	45.17	23.82	2.23
3000.0	13.04	18.30	6.41	13.72	0.95	0.84	45.33	23.72	2.38



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

HXG-242-4+

7/14/2017

Page 4 of 9

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 133.22mA @ Temperature = -45degC

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
500.0	15.68	20.12	20.88	17.80	1.12	0.64	38.62	22.36	1.56
600.0	15.56	20.11	21.14	17.83	1.13	0.65	38.43	22.32	1.75
700.0	15.49	20.02	19.93	17.15	1.13	0.65	38.21	22.28	1.67
800.0	15.40	19.97	19.67	16.85	1.13	0.67	38.99	22.44	1.74
900.0	15.30	19.93	19.15	16.14	1.13	0.66	38.50	22.35	1.74
1000.0	15.24	19.90	18.16	15.85	1.12	0.67	39.72	22.52	1.80
1050.0	15.16	19.92	18.38	15.67	1.14	0.68	39.70	22.52	1.85
1100.0	15.11	19.82	17.73	15.59	1.13	0.67	41.16	22.60	1.74
1150.0	15.10	19.74	17.10	15.10	1.13	0.68	40.74	22.57	1.84
1200.0	15.01	19.77	17.15	15.20	1.13	0.69	40.41	22.50	1.86
1250.0	15.01	19.76	16.47	14.88	1.13	0.69	40.32	22.49	1.85
1300.0	14.93	19.71	16.63	14.79	1.13	0.69	39.92	22.51	1.85
1350.0	14.86	19.70	16.38	14.99	1.13	0.69	40.34	22.57	1.83
1400.0	14.81	19.60	15.73	14.56	1.13	0.70	41.39	22.66	1.87
1450.0	14.75	19.55	15.38	14.34	1.13	0.70	42.91	22.75	1.93
1500.0	14.70	19.58	15.18	14.33	1.13	0.71	41.38	22.75	1.94
1550.0	14.70	19.50	14.85	14.18	1.12	0.71	40.52	22.64	1.91
1600.0	14.62	19.43	14.57	13.92	1.13	0.71	42.92	22.87	1.91
1650.0	14.52	19.43	14.24	14.20	1.12	0.72	42.19	22.91	1.94
1700.0	14.47	19.42	14.40	14.28	1.12	0.72	43.44	22.90	1.86
1750.0	14.41	19.36	13.86	14.00	1.12	0.72	40.64	22.84	1.79
1800.0	14.40	19.30	13.32	13.74	1.13	0.74	41.88	22.78	1.99
1850.0	14.38	19.27	12.94	13.82	1.12	0.74	43.53	23.00	1.93
1900.0	14.26	19.15	12.79	13.99	1.12	0.74	42.44	22.93	1.92
1950.0	14.18	19.16	12.64	13.99	1.12	0.74	42.36	23.03	2.10
2000.0	14.19	19.18	12.17	14.13	1.12	0.75	42.40	22.99	2.04
2050.0	14.05	19.14	12.20	14.13	1.11	0.76	42.17	22.95	1.95
2100.0	14.05	19.01	11.71	13.89	1.11	0.76	43.51	23.10	1.97
2150.0	13.94	19.06	11.48	14.11	1.11	0.77	43.09	23.04	1.95
2200.0	13.90	18.88	11.13	13.93	1.10	0.77	44.25	23.11	2.03
2250.0	13.86	18.84	10.87	13.82	1.10	0.77	44.50	23.10	2.05
2300.0	13.78	18.80	10.41	14.05	1.10	0.78	44.68	23.08	2.04
2350.0	13.75	18.83	10.18	14.26	1.09	0.78	44.45	23.20	1.87
2400.0	13.67	18.73	9.72	13.94	1.08	0.79	44.02	23.13	1.97
2500.0	13.59	18.65	9.29	13.89	1.07	0.80	44.48	23.13	2.11
2600.0	13.43	18.58	8.79	14.36	1.06	0.80	43.58	23.23	2.11
2700.0	13.33	18.49	8.17	14.51	1.03	0.82	48.21	23.20	2.20
2800.0	13.22	18.43	7.58	13.81	1.00	0.83	46.26	23.20	2.20
2900.0	13.12	18.26	7.05	14.00	0.98	0.83	47.39	23.14	2.17
3000.0	12.97	18.23	6.45	13.78	0.95	0.84	47.96	23.06	2.28

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 160.75mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
500.0	15.86	20.27	20.84	17.97	1.12	0.64	37.90	23.50	1.65
600.0	15.74	20.22	21.07	17.89	1.13	0.65	37.78	23.46	1.81
700.0	15.69	20.18	19.81	17.38	1.13	0.65	37.63	23.41	1.69
800.0	15.58	20.12	19.55	16.97	1.13	0.66	38.55	23.60	1.76
900.0	15.48	20.06	19.04	16.36	1.13	0.66	37.92	23.48	1.79
1000.0	15.42	20.04	18.03	15.81	1.12	0.67	39.18	23.72	1.84
1050.0	15.34	20.05	18.25	15.78	1.14	0.67	38.62	23.67	1.86
1100.0	15.29	19.93	17.58	15.68	1.13	0.67	39.63	23.79	1.82
1150.0	15.28	19.92	16.97	15.32	1.13	0.68	39.93	23.76	1.90
1200.0	15.17	19.90	17.03	15.00	1.13	0.68	39.46	23.67	1.91
1250.0	15.19	19.89	16.37	14.86	1.13	0.69	39.96	23.66	1.91
1300.0	15.10	19.83	16.53	14.81	1.13	0.69	38.98	23.69	1.92
1350.0	15.02	19.82	16.26	14.93	1.13	0.69	39.80	23.76	1.86
1400.0	14.98	19.76	15.61	14.62	1.13	0.70	39.95	23.86	1.93
1450.0	14.91	19.72	15.26	14.30	1.13	0.70	40.80	23.97	1.97
1500.0	14.86	19.73	15.04	14.52	1.13	0.71	40.80	23.97	2.02
1550.0	14.86	19.64	14.72	14.15	1.12	0.71	39.97	23.81	1.94
1600.0	14.78	19.61	14.44	13.98	1.13	0.72	41.17	24.12	2.00
1650.0	14.68	19.57	14.11	14.19	1.12	0.72	40.96	24.15	1.99
1700.0	14.63	19.54	14.27	14.21	1.12	0.72	41.82	24.15	1.91
1750.0	14.57	19.49	13.75	14.17	1.12	0.72	40.63	24.08	1.85
1800.0	14.56	19.46	13.20	14.02	1.13	0.73	40.71	24.00	2.05
1850.0	14.54	19.43	12.82	13.87	1.12	0.74	42.51	24.27	1.97
1900.0	14.42	19.28	12.69	13.87	1.12	0.74	43.47	24.19	1.91
1950.0	14.33	19.31	12.55	14.27	1.12	0.75	42.42	24.32	2.10
2000.0	14.34	19.28	12.07	13.89	1.11	0.75	40.86	24.26	2.06
2050.0	14.20	19.26	12.12	14.01	1.11	0.75	41.64	24.21	2.02
2100.0	14.20	19.14	11.61	13.59	1.11	0.76	42.20	24.42	1.98
2150.0	14.07	19.14	11.39	13.87	1.11	0.77	42.85	24.35	2.00
2200.0	14.05	19.04	11.05	13.89	1.10	0.77	42.44	24.48	2.03
2250.0	14.00	19.00	10.78	13.99	1.09	0.77	43.78	24.47	2.11
2300.0	13.92	18.89	10.34	14.00	1.10	0.78	46.50	24.53	2.12
2350.0	13.89	18.95	10.11	14.14	1.09	0.78	43.48	24.64	1.93
2400.0	13.81	18.86	9.66	13.89	1.08	0.79	43.59	24.51	2.01
2500.0	13.73	18.78	9.24	14.04	1.07	0.80	44.75	24.54	2.17
2600.0	13.57	18.73	8.73	14.22	1.05	0.80	43.23	24.58	2.21
2700.0	13.47	18.59	8.11	14.07	1.03	0.82	44.07	24.58	2.25
2800.0	13.35	18.58	7.51	13.92	1.00	0.83	43.51	24.58	2.33
2900.0	13.25	18.40	7.01	13.93	0.98	0.83	43.13	24.46	2.29
3000.0	13.10	18.35	6.41	13.76	0.95	0.84	43.64	24.43	2.36



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 minicircuits.com

IF/RF MICROWAVE COMPONENTS

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.00V, Id = 148.00mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
500.0	16.62	21.12	15.64	17.96	1.11	0.67	46.22	22.79	2.22
600.0	16.46	21.07	15.82	17.40	1.12	0.68	45.94	22.73	2.31
700.0	16.37	20.96	15.19	16.31	1.11	0.68	43.86	22.68	2.22
800.0	16.21	20.92	14.68	15.59	1.12	0.70	46.59	22.94	2.30
900.0	16.05	20.84	14.29	14.92	1.12	0.70	44.91	22.76	2.34
1000.0	15.96	20.78	13.69	14.28	1.11	0.71	48.42	23.10	2.45
1050.0	15.85	20.79	13.84	14.28	1.12	0.72	49.23	23.01	2.43
1100.0	15.79	20.66	13.41	13.98	1.11	0.72	47.27	23.20	2.37
1150.0	15.73	20.60	12.93	13.56	1.12	0.73	49.20	23.18	2.46
1200.0	15.62	20.58	12.91	13.22	1.11	0.73	54.87	23.05	2.49
1250.0	15.60	20.52	12.51	13.18	1.11	0.74	46.84	23.05	2.48
1300.0	15.49	20.51	12.53	12.84	1.11	0.74	48.40	23.05	2.49
1350.0	15.38	20.45	12.42	12.91	1.11	0.74	49.55	23.17	2.46
1400.0	15.33	20.34	11.98	12.58	1.11	0.75	48.66	23.28	2.50
1450.0	15.24	20.28	11.75	12.37	1.11	0.75	46.02	23.43	2.59
1500.0	15.17	20.28	11.65	12.49	1.10	0.75	45.82	23.42	2.62
1550.0	15.13	20.17	11.35	12.14	1.10	0.76	51.93	23.23	2.57
1600.0	15.02	20.11	11.14	12.04	1.11	0.77	45.95	23.56	2.59
1650.0	14.89	20.08	10.92	11.84	1.10	0.77	46.17	23.56	2.59
1700.0	14.82	20.06	11.01	12.17	1.10	0.77	45.56	23.53	2.59
1750.0	14.74	20.00	10.69	12.02	1.10	0.78	49.30	23.45	2.45
1800.0	14.72	19.93	10.33	11.80	1.11	0.79	49.29	23.39	2.67
1850.0	14.68	19.87	10.11	11.88	1.10	0.79	45.35	23.68	2.58
1900.0	14.53	19.75	9.99	11.68	1.10	0.79	45.24	23.60	2.66
1950.0	14.42	19.75	9.93	11.87	1.10	0.80	44.13	23.69	2.75
2000.0	14.43	19.70	9.63	11.84	1.09	0.81	48.30	23.57	2.70
2050.0	14.27	19.68	9.66	12.01	1.09	0.81	47.29	23.50	2.68
2100.0	14.25	19.53	9.27	11.67	1.09	0.82	45.99	23.72	2.71
2150.0	14.11	19.53	9.14	11.87	1.09	0.83	46.22	23.64	2.72
2200.0	14.06	19.39	8.90	11.93	1.08	0.83	45.28	23.72	2.74
2250.0	13.99	19.37	8.73	11.65	1.07	0.83	43.20	23.71	2.79
2300.0	13.91	19.20	8.39	11.71	1.08	0.84	43.24	23.81	2.82
2350.0	13.86	19.26	8.28	12.06	1.08	0.84	44.15	23.87	2.68
2400.0	13.77	19.17	7.95	12.06	1.07	0.85	44.87	23.72	2.73
2500.0	13.67	19.08	7.64	12.38	1.06	0.87	42.99	23.75	2.89
2600.0	13.49	18.93	7.29	12.59	1.05	0.88	44.67	23.71	2.96
2700.0	13.38	18.82	6.79	12.96	1.02	0.89	43.30	23.71	2.99
2800.0	13.23	18.78	6.37	13.12	0.99	0.91	42.56	23.70	3.07
2900.0	13.10	18.55	5.93	13.27	0.97	0.92	43.58	23.53	3.09
3000.0	12.94	18.52	5.43	13.52	0.95	0.94	41.05	23.54	3.20



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. OR

HXG-242-4+

7/14/2017

Page 7 of 9

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 135.23mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
500.0	16.52	21.01	15.76	18.24	1.11	0.67	44.52	22.31	2.12
600.0	16.37	20.98	15.95	17.43	1.12	0.68	46.57	22.24	2.25
700.0	16.26	20.86	15.30	16.24	1.11	0.69	44.43	22.18	2.19
800.0	16.11	20.82	14.79	15.71	1.12	0.70	44.50	22.43	2.26
900.0	15.97	20.72	14.42	14.86	1.12	0.70	43.55	22.28	2.29
1000.0	15.86	20.65	13.78	14.08	1.11	0.71	43.95	22.59	2.39
1050.0	15.75	20.68	13.93	14.19	1.12	0.72	44.46	22.52	2.39
1100.0	15.68	20.53	13.52	13.86	1.11	0.71	43.39	22.68	2.32
1150.0	15.64	20.47	13.02	13.33	1.12	0.73	42.79	22.65	2.43
1200.0	15.51	20.43	13.00	13.29	1.11	0.73	44.45	22.53	2.43
1250.0	15.52	20.42	12.60	12.94	1.11	0.73	42.81	22.53	2.42
1300.0	15.40	20.37	12.64	12.98	1.11	0.74	42.87	22.55	2.47
1350.0	15.29	20.36	12.52	12.70	1.11	0.74	43.51	22.64	2.44
1400.0	15.24	20.22	12.08	12.67	1.11	0.74	43.02	22.76	2.46
1450.0	15.14	20.13	11.83	12.34	1.10	0.75	42.77	22.89	2.53
1500.0	15.07	20.15	11.73	12.50	1.11	0.76	42.04	22.88	2.54
1550.0	15.04	20.04	11.43	11.92	1.10	0.76	43.68	22.69	2.51
1600.0	14.93	19.99	11.23	12.04	1.11	0.77	43.52	23.00	2.57
1650.0	14.81	19.96	10.99	11.81	1.10	0.77	43.84	23.02	2.59
1700.0	14.72	19.98	11.10	12.14	1.10	0.77	44.15	22.98	2.45
1750.0	14.65	19.85	10.77	11.95	1.10	0.78	43.05	22.92	2.41
1800.0	14.62	19.77	10.42	11.68	1.11	0.78	43.54	22.85	2.64
1850.0	14.59	19.72	10.19	11.73	1.10	0.79	42.27	23.12	2.58
1900.0	14.45	19.60	10.07	11.44	1.10	0.79	41.89	23.04	2.55
1950.0	14.34	19.56	10.01	11.69	1.10	0.80	41.64	23.16	2.72
2000.0	14.34	19.53	9.70	11.74	1.09	0.81	44.11	23.04	2.66
2050.0	14.19	19.50	9.73	11.90	1.09	0.81	43.65	22.96	2.64
2100.0	14.15	19.41	9.33	11.55	1.09	0.81	43.16	23.17	2.67
2150.0	14.03	19.40	9.20	12.06	1.09	0.83	43.07	23.10	2.63
2200.0	13.98	19.24	8.97	12.00	1.08	0.83	42.65	23.17	2.70
2250.0	13.91	19.16	8.80	11.77	1.08	0.83	41.76	23.19	2.75
2300.0	13.83	19.06	8.46	12.24	1.08	0.84	41.20	23.26	2.72
2350.0	13.78	19.10	8.34	12.44	1.08	0.85	42.04	23.32	2.60
2400.0	13.69	19.02	8.01	12.25	1.07	0.85	43.58	23.17	2.69
2500.0	13.59	18.91	7.70	12.66	1.06	0.87	41.87	23.21	2.83
2600.0	13.42	18.76	7.33	12.89	1.04	0.87	42.40	23.18	2.88
2700.0	13.30	18.65	6.83	13.22	1.02	0.89	42.42	23.19	2.96
2800.0	13.16	18.59	6.41	13.46	0.99	0.91	41.44	23.15	3.05
2900.0	13.04	18.37	5.96	13.71	0.97	0.92	42.91	23.03	3.00
3000.0	12.88	18.33	5.45	14.15	0.95	0.94	42.30	23.00	3.12



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 minicircuits.com

IF/RF MICROWAVE COMPONENTS

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 160.80mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
500.0	16.68	21.19	15.53	17.98	1.11	0.67	44.47	23.24	2.23
600.0	16.53	21.12	15.70	17.53	1.12	0.68	44.49	23.18	2.37
700.0	16.42	21.06	15.11	16.51	1.11	0.69	43.66	23.12	2.30
800.0	16.27	20.99	14.59	15.71	1.12	0.70	45.41	23.39	2.37
900.0	16.12	20.94	14.21	15.11	1.12	0.71	44.31	23.20	2.39
1000.0	16.03	20.85	13.61	14.29	1.10	0.71	45.93	23.56	2.46
1050.0	15.91	20.86	13.75	14.06	1.12	0.72	46.44	23.49	2.52
1100.0	15.84	20.70	13.36	13.86	1.11	0.72	46.77	23.69	2.43
1150.0	15.81	20.66	12.86	13.34	1.12	0.73	47.35	23.66	2.55
1200.0	15.67	20.65	12.83	13.44	1.11	0.73	47.91	23.54	2.54
1250.0	15.67	20.62	12.45	13.31	1.11	0.74	47.47	23.53	2.53
1300.0	15.55	20.57	12.46	13.15	1.11	0.74	50.19	23.54	2.56
1350.0	15.45	20.55	12.34	12.91	1.11	0.74	46.62	23.66	2.55
1400.0	15.39	20.43	11.92	12.79	1.11	0.75	46.05	23.78	2.56
1450.0	15.30	20.36	11.69	12.51	1.11	0.75	45.82	23.93	2.65
1500.0	15.23	20.34	11.59	12.51	1.11	0.76	46.98	23.92	2.70
1550.0	15.19	20.24	11.29	12.24	1.10	0.76	45.50	23.72	2.66
1600.0	15.09	20.20	11.08	12.08	1.11	0.77	45.25	24.06	2.65
1650.0	14.96	20.15	10.86	11.99	1.10	0.77	44.25	24.06	2.66
1700.0	14.88	20.17	10.94	12.04	1.10	0.78	45.02	24.03	2.61
1750.0	14.80	20.10	10.63	12.01	1.10	0.78	46.06	23.96	2.53
1800.0	14.77	19.99	10.29	11.82	1.11	0.79	44.11	23.88	2.75
1850.0	14.75	19.94	10.05	11.59	1.10	0.79	44.84	24.19	2.67
1900.0	14.59	19.85	9.94	11.58	1.10	0.79	43.42	24.11	2.72
1950.0	14.48	19.83	9.88	11.78	1.10	0.80	44.16	24.19	2.77
2000.0	14.49	19.78	9.57	11.76	1.09	0.81	44.31	24.04	2.81
2050.0	14.33	19.76	9.61	12.00	1.08	0.81	44.04	23.97	2.77
2100.0	14.30	19.66	9.21	11.56	1.09	0.82	43.15	24.18	2.78
2150.0	14.16	19.61	9.09	11.81	1.09	0.83	43.40	24.12	2.81
2200.0	14.11	19.49	8.85	11.79	1.08	0.83	44.19	24.19	2.83
2250.0	14.05	19.46	8.69	11.84	1.07	0.83	42.34	24.21	2.85
2300.0	13.97	19.33	8.35	11.79	1.08	0.84	42.63	24.32	2.92
2350.0	13.92	19.34	8.25	11.98	1.08	0.85	42.89	24.36	2.75
2400.0	13.84	19.25	7.91	11.94	1.06	0.85	41.73	24.19	2.81
2500.0	13.72	19.19	7.61	12.51	1.06	0.87	41.49	24.22	2.96
2600.0	13.54	19.01	7.26	12.58	1.04	0.87	42.11	24.19	3.02
2700.0	13.42	18.93	6.77	12.67	1.02	0.89	41.54	24.19	3.10
2800.0	13.27	18.87	6.35	12.80	0.99	0.91	40.62	24.14	3.16
2900.0	13.15	18.67	5.91	13.25	0.97	0.92	40.61	23.98	3.18
3000.0	12.99	18.64	5.42	13.30	0.95	0.94	40.07	24.01	3.30



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS











REV. OR

HXG-242-4+








7/14/2017

Page 9 of 9

Typical Performance Curves

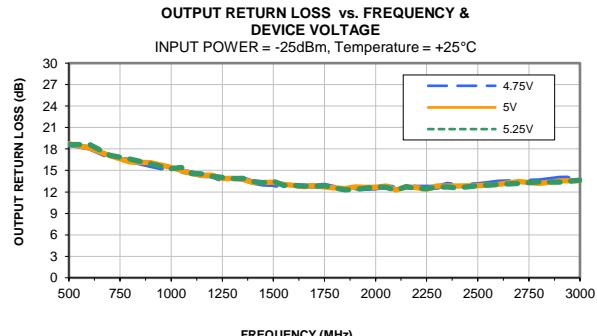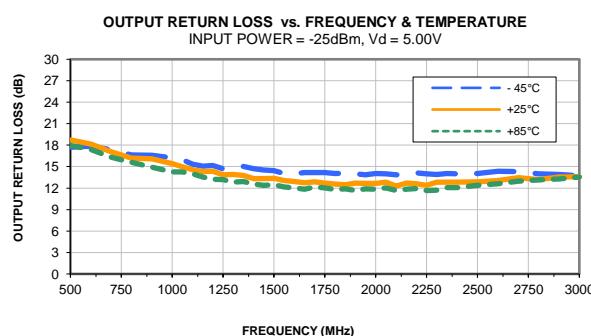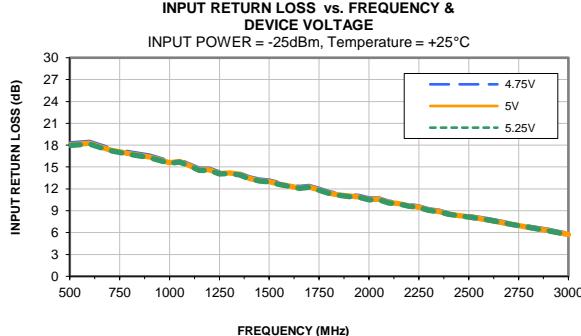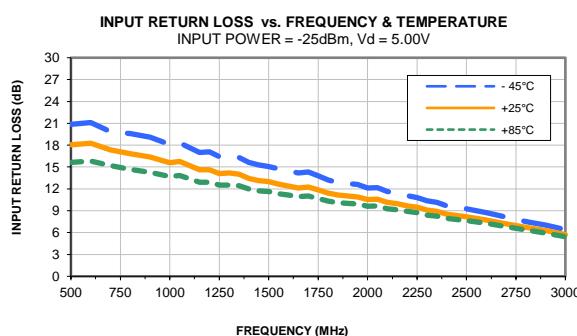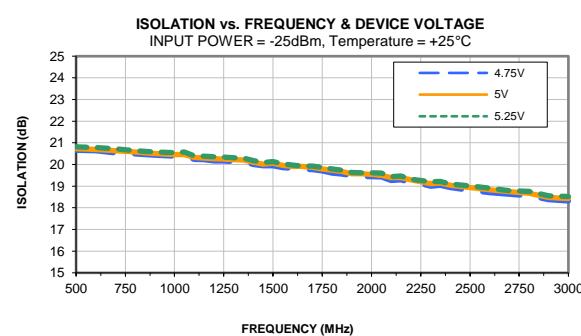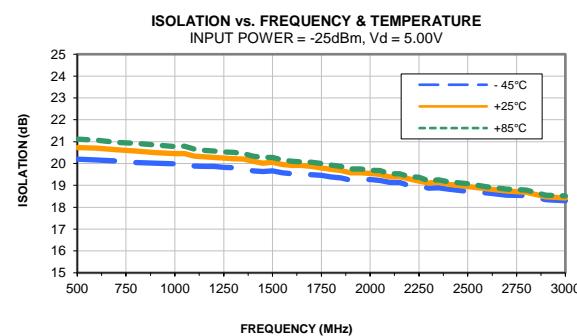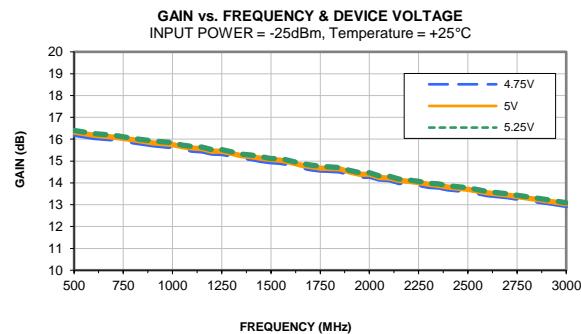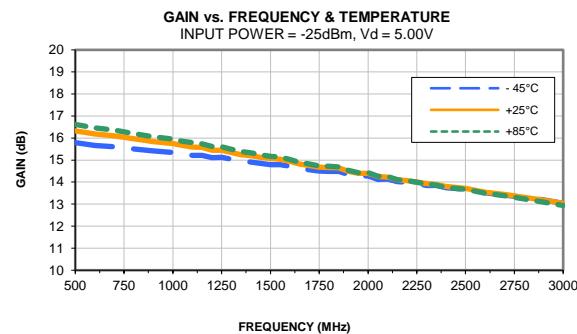

Typical Performance Curves

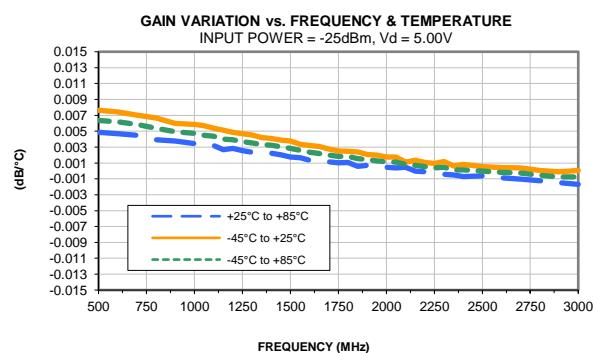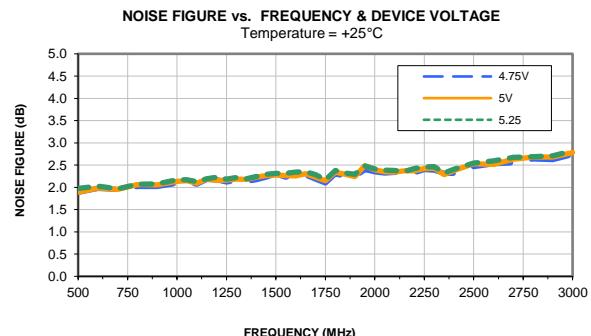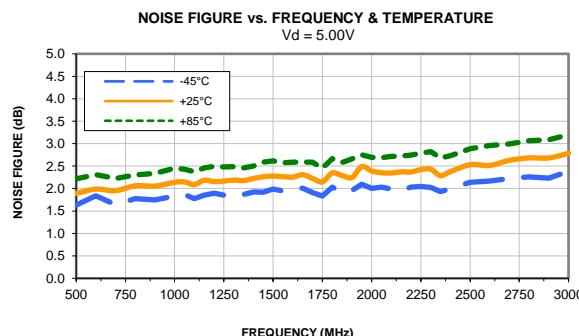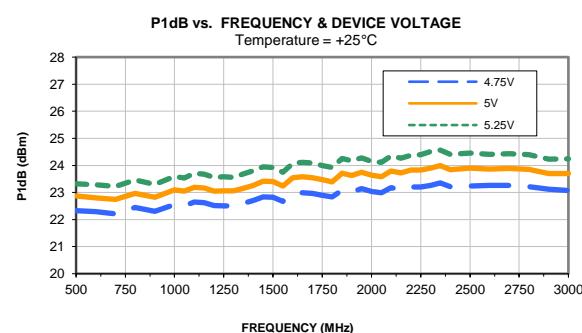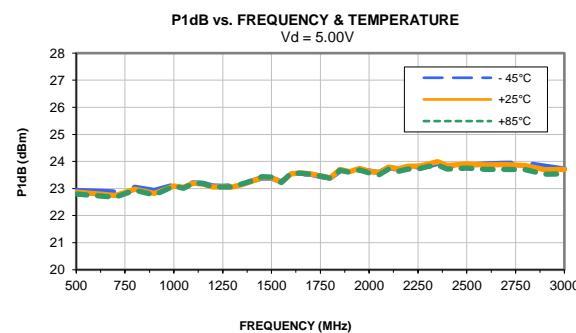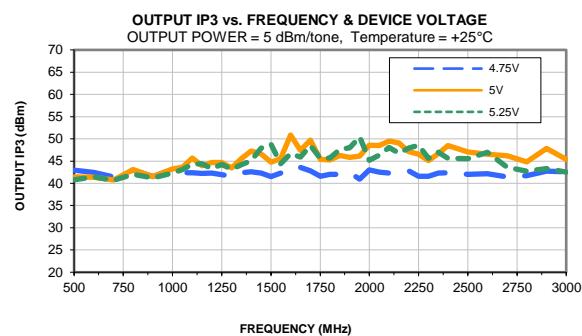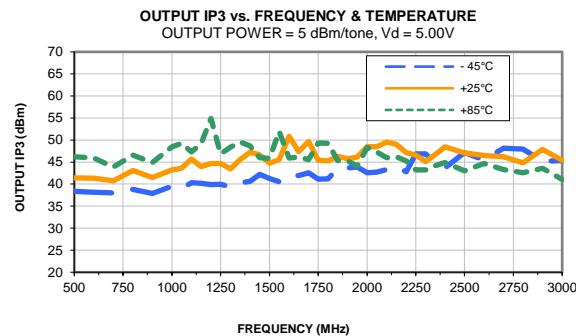


Case Style

LZ

Outline Dimensions

LZ1671

PCB Land Pattern

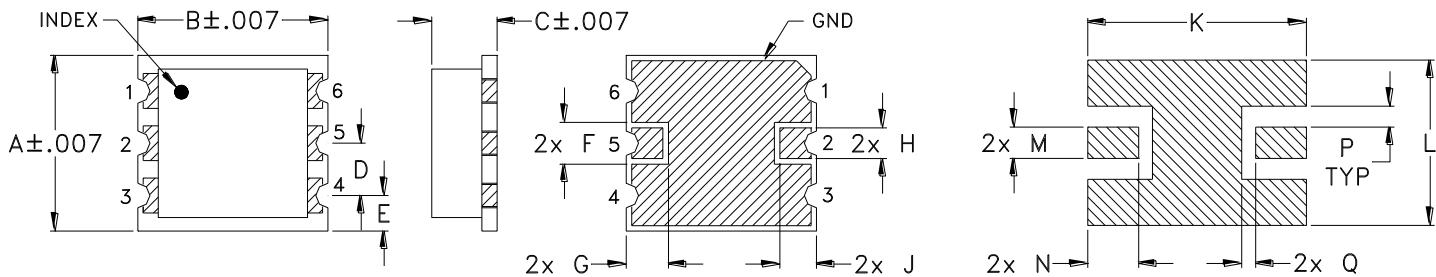

Suggested Layout
Pattern to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
LZ1671	.252 (6.40)	.274 (6.96)	.094 (2.40)	.075 (1.91)	.051 (1.30)	.060 (1.53)	.061 (1.55)	.044 (1.12)	.053 (1.35)	.290 (7.37)	.237 (6.02)	.045 (1.14)

CASE #	N	P	Q	R	WT. GRAM
LZ1671	.060 (1.52)	.030 (.76)	.020 (.51)	-	0.20

Dimensions are in inches (mm). Tolerances: 3 Pl. $\pm .003$ unless otherwise specified

Notes:

1. Case material: Ceramic.
2. Base material: 20 mil thk laminate.
3. Termination finish: 3-5 μ inch (0.075-0.125 microns) gold plating over 120-240 μ inch (3-6 microns) low stress electroless nickel.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F78

DEVICE ORIENTATION IN T&R

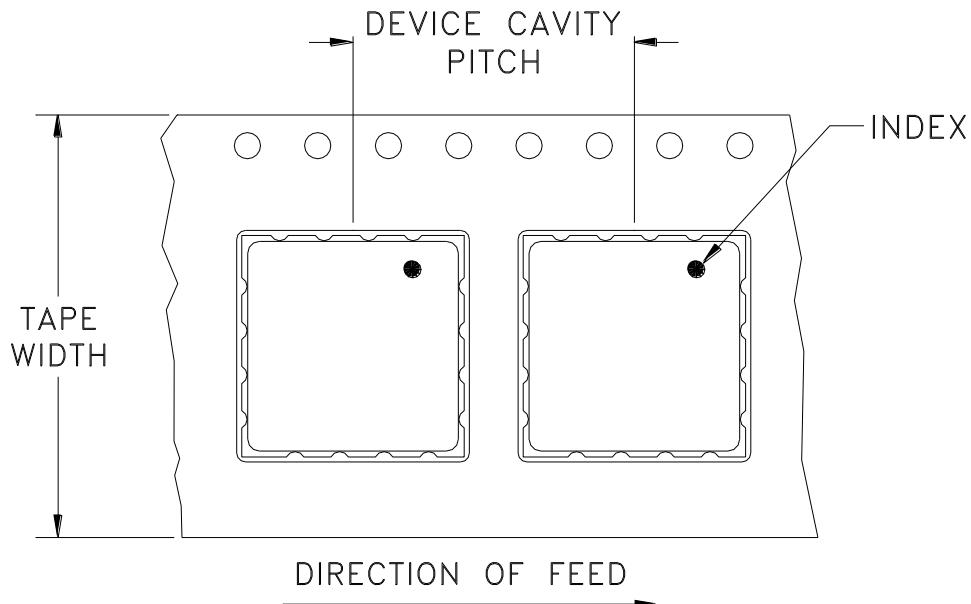

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note
16	12	7	10
			20
			50
			100
			200
		13	500, 1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M133067	NEW RELEASE	10/31/11	IL	DJ


SUGGESTED MOUNTING CONFIGURATION FOR
LZ1671 CASE STYLE, "06AM03" PIN CODE

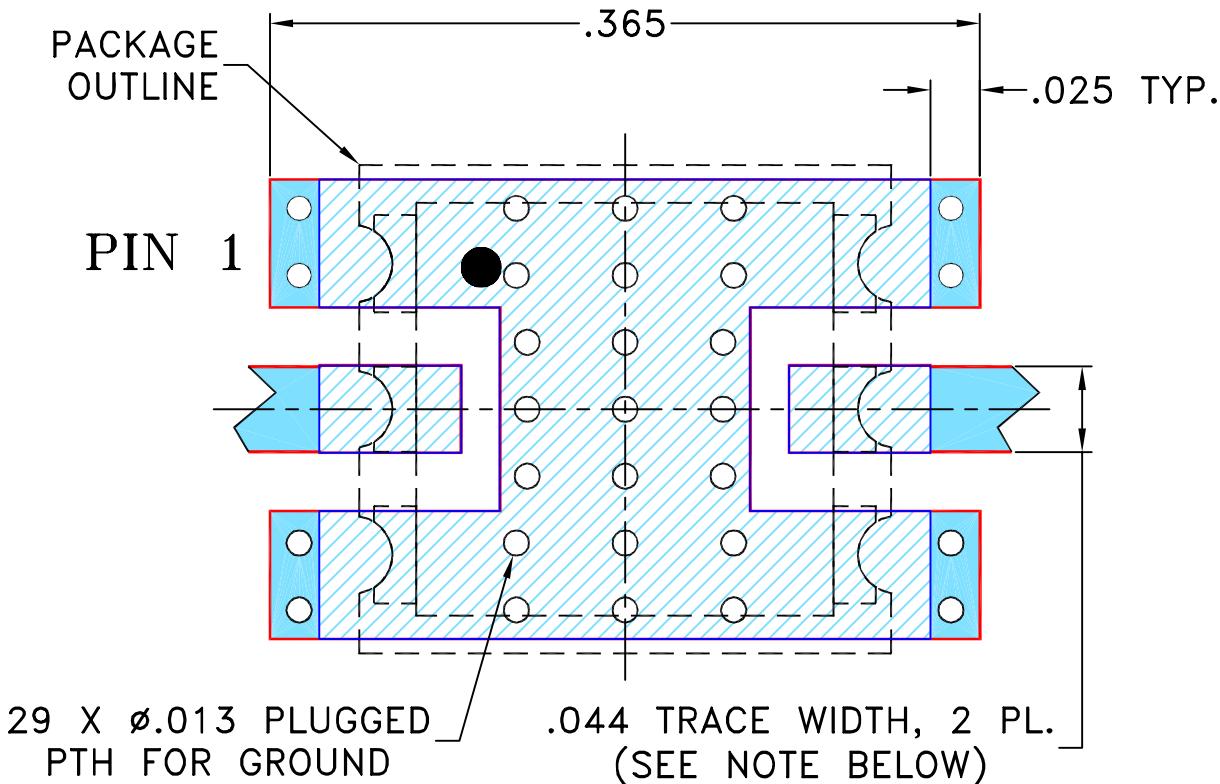NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.020" \pm .0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS \pm 3 PL DECIMALS $\pm .005$ ANGLES \pm FRACTIONS \pm 

DRAWN

CHECKED

APPROVED

IL

AV

DJ

08/04/11

10/31/11

10/31/11



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235



PL, 06AM03, LZ1671, TB-641+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-350	OR
FILE: 98PL350	SCALE: 10:1	SHEET: 1 OF 1	

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE DUPLICATED, DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEET1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

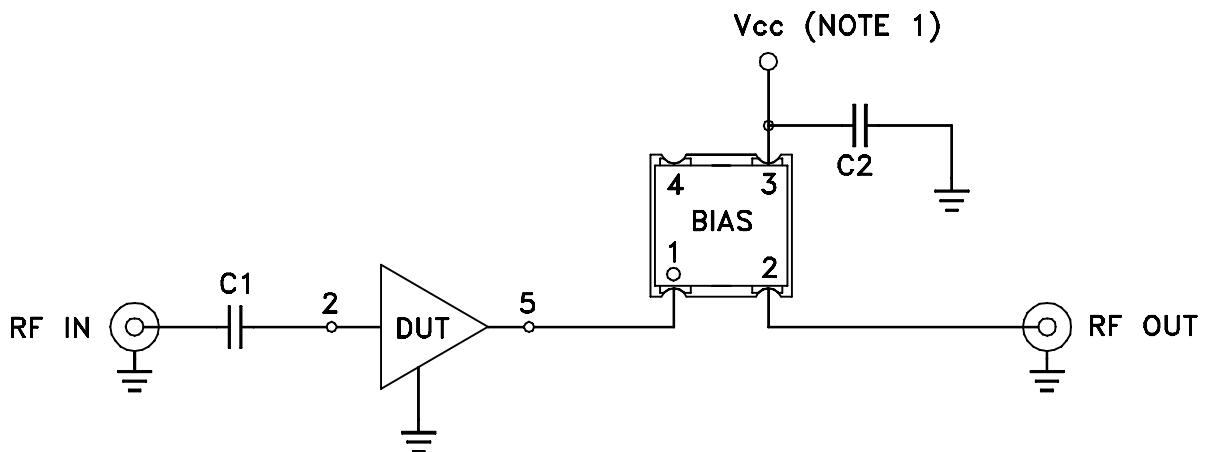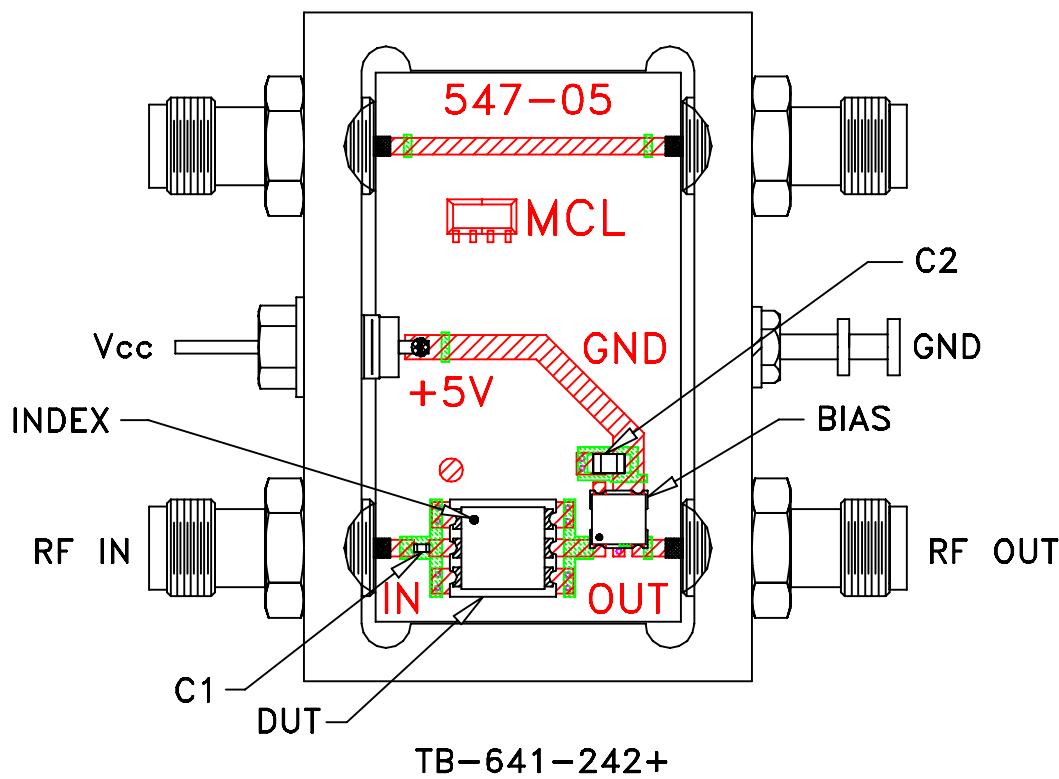

COMPONENT	DESCRIPTION
DUT	HXG-242+
C1	0.001 uF
C2	0.01 uF
BIAS TEE	Mini-Circuits TCBT-14+

Schematic Diagram

NOTES:

1. Vcc voltage: +5V.
2. SMA Female connectors.
3. PCB material: Rogers RO4350 or equivalent, dielectric constant=3.5, dielectric thickness=.020 inch.

Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
HTOL	1000 hours at 85°C	MIL-STD-883, Method 1005, Condition B
Temperature Cycling	-65° to 150°C, 500 cycles	JESD22-A104, condition C
Autoclave	121°C, 100% RH, 15 PSIG, 96 hours	JESD22-A102, Condition C
High Temp Storage	150°C 168 hours	JESD22-A103, condition B
Solderability, SMT Method	Steam Aging: 8 hours. Solder Reflow for SnAgCu: 245°C+5°C, SnPb: 225°C+5°C	JESD22-B102, Method 2
Marking Resistance to Solvents	Solution A, B, C. Continue with reflow at Tmax: 260°C	JESD22-B017D