



CERAMIC

Low Pass Filter

LFCV-52+

50Ω DC to 52 MHz

THE BIG DEAL

- Small size 3.2mm x 2.5 mm
- High Power handling (7W)
- High Rejection 50 dB typ.
- Hermetically sealed
- Protected by U.S. Patent 6,943,646



Generic photo used for illustration purposes only

CASE STYLE: JV1210C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Harmonic rejection
- VHF/UHF transmitters/receivers
- Anti-aliasing for A/D converter

PRODUCT OVERVIEW

Mini-Circuits' Low Pass Filter LFCV-52+ is an LTCC based 7 section design, that extends the lower frequency cutoff range of the existing LFCN series to 52 MHz. Systems that previously relied on active or lumped element filtering to support these lower frequencies can save power and system complexity by integrating the LFCV-52+ into new designs. These filters are offered in a EIA 1210 package size and have a typical stop band rejection of 50 dB.

KEY FEATURES

Feature	Advantages
Small Size (3.2mm x 2.5mm)	Available in the size of typical resistors or capacitors (EIA 1210), the ultra small LFCV series integrates up to 7 low pass sections in a simple SMT chip form factor.
High Power Handling	The LFCV series can withstand up to 7W CW signal without damage making this filter ideal for use in medium power to transmit paths.
Temperature Stability	Over a 180°C operating temperature range (-55°C to +125°C), the LFCV series ceramic filters typically exhibit less than 0.2 dB pass band insertion loss variation, and less than 0.4 dB rejection variation at the 20 dB point (as measured on a single unit)
High Rejection	Achieving 50 dB rejection @ 210 MHz; the LFCV-52+ provides a versatile anti aliasing solution for high data rate receivers.

REV. D
ECO-015193
LFCV-52+
EDU4328
URJ
220922





CERAMIC

Low Pass Filter

LFCV-52+

ELECTRICAL SPECIFICATIONS^{1,2} AT 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units	
Passband	Insertion Loss	DC-F1	DC - 52	—	0.9	1.3	dB
	Freq. Cut-Off	F2*	99	—	3	—	dB
	Return Loss	DC-F1	DC - 52	—	20	—	dB
Stop Band	Rejection Loss	F3	140	20	25	—	dB
		F4-F5	170 - 1100	—	40	—	
		F6	1200	—	13	—	

1 DC de-coupling capacitors are required in Applications where DC voltage and/or current is present at either input or output ports. Please contact Mini-Circuits for alternatives if DC pass from IN-OUT is required.

2 Measured on Mini-Circuits Characterization Test Board TB-LFCV-52+


* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-55°C to 125°C
Storage temperature	-55°C to 125°C
RF Power Input*	7W @25°C

*Passband rating, derate linearly to 0.9W at 125°C ambient
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

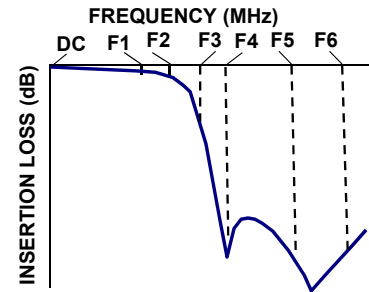

FUNCTIONAL SCHEMATIC

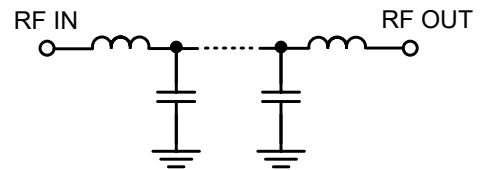




PAD CONNECTIONS

INPUT	1
OUTPUT	3
GROUND	2,4

PRODUCT MARKING: VH

DEMO BOARD MCL P/N: TB-LFCV-52+ SUGGESTED PCB LAYOUT (PL-307)

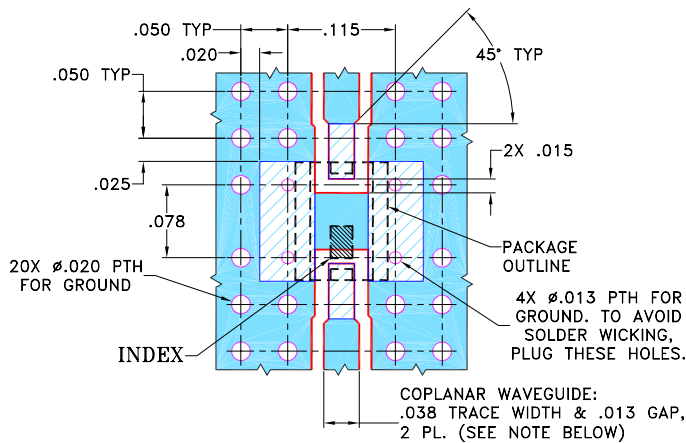


NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

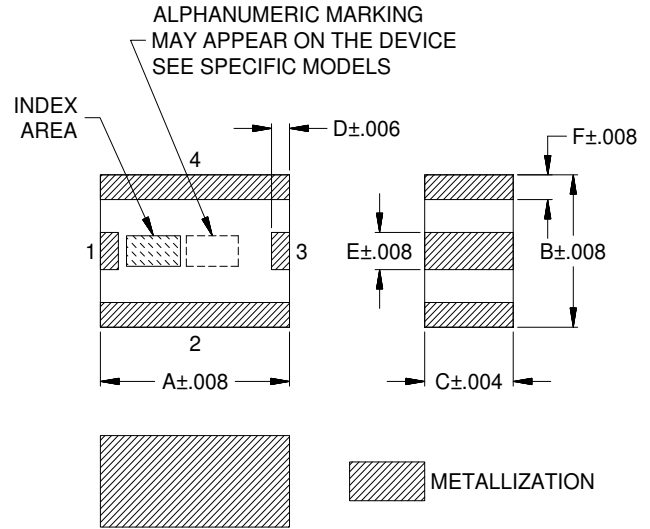

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	Wt.
.126	.098	.059	.012	.024	.016	grams
3.2	2.5	1.5	.3	.6	.4	.03

Note: Please refer to case style drawing for details





CERAMIC

Low Pass Filter

LFCV-52+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	0.43	25.47
20	0.54	21.86
25	0.60	20.90
40	0.79	21.53
52	0.93	28.10
99	2.64	13.98
130	20.10	1.23
140	25.59	1.08
141	26.10	1.07
150	30.34	1.01
170	38.03	0.93
210	49.66	0.82
300	55.80	0.60
500	49.73	0.33
1100	28.15	0.36
1200	15.60	0.83

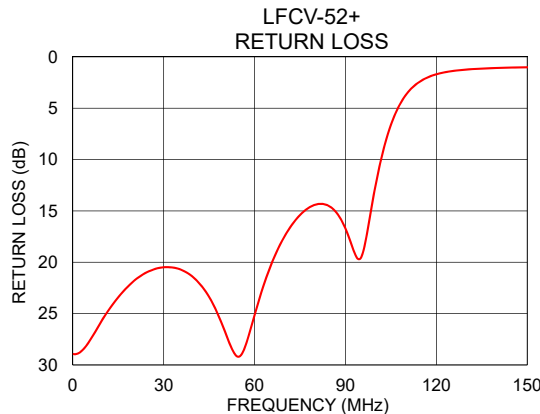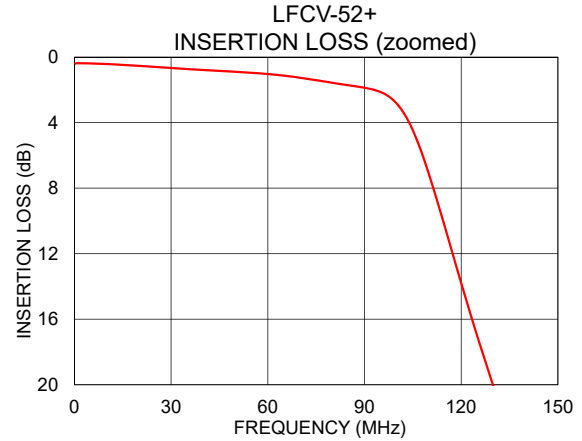

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp








Typical Performance Data

FREQ. (MHz)	INSERTION LOSS			INPUT RETURN LOSS			OUTPUT RETURN LOSS		
	(dB)			(dB)			(dB)		
	@-55°C	@+25°C	@+125°C	@-55°C	@+25°C	@+125°C	@-55°C	@+25°C	@+125°C
10	0.34	0.43	0.53	26.68	25.47	24.09	26.63	25.44	24.03
12	0.36	0.45	0.55	25.58	24.59	23.39	25.60	24.63	23.38
14	0.38	0.47	0.58	24.60	23.78	22.73	24.70	23.90	22.77
16	0.40	0.49	0.60	23.75	23.06	22.12	23.90	23.22	22.21
18	0.42	0.52	0.63	23.02	22.43	21.59	23.19	22.62	21.70
20	0.44	0.54	0.65	22.39	21.86	21.10	22.58	22.08	21.23
22	0.47	0.56	0.68	21.88	21.41	20.72	22.06	21.64	20.86
24	0.49	0.59	0.70	21.46	21.04	20.41	21.68	21.30	20.57
26	0.51	0.62	0.73	21.15	20.78	20.20	21.39	21.05	20.36
28	0.54	0.64	0.76	20.92	20.58	20.05	21.18	20.87	20.23
30	0.56	0.67	0.79	20.80	20.49	20.00	21.06	20.79	20.18
32	0.58	0.70	0.82	20.77	20.49	20.04	21.03	20.79	20.20
34	0.60	0.72	0.85	20.83	20.57	20.15	21.10	20.88	20.32
36	0.63	0.75	0.88	21.00	20.76	20.37	21.28	21.07	20.54
38	0.65	0.77	0.90	21.30	21.07	20.72	21.58	21.38	20.87
40	0.67	0.79	0.93	21.75	21.53	21.19	22.04	21.86	21.35
42	0.68	0.82	0.95	22.36	22.14	21.81	22.66	22.48	21.97
44	0.70	0.84	0.98	23.14	22.91	22.58	23.45	23.27	22.74
46	0.72	0.86	1.00	24.17	23.91	23.56	24.48	24.27	23.70
48	0.74	0.88	1.03	25.46	25.14	24.72	25.80	25.55	24.87
50	0.75	0.90	1.06	27.01	26.58	25.99	27.48	27.10	26.21
52	0.77	0.93	1.08	28.74	28.10	27.19	29.40	28.76	27.47
54	0.79	0.95	1.12	30.08	29.13	27.79	31.00	29.95	28.16
56	0.82	0.98	1.15	29.88	28.83	27.28	30.86	29.62	27.67
58	0.84	1.01	1.18	28.07	27.20	25.81	28.82	27.81	26.14
60	0.87	1.04	1.22	25.77	25.13	24.00	26.24	25.52	24.22
62	0.90	1.08	1.26	23.62	23.13	22.24	23.91	23.38	22.36
93	1.67	2.01	2.41	19.01	19.10	18.73	19.99	20.26	19.72
99	2.15	2.64	3.27	15.54	13.98	12.30	16.12	14.44	12.58
100	2.31	2.84	3.52	13.73	12.40	10.95	14.12	12.72	11.15
115	9.44	10.42	11.59	2.26	2.32	2.35	2.31	2.36	2.34
120	12.81	13.80	14.93	1.57	1.69	1.80	1.60	1.73	1.78
140	24.72	25.59	26.55	0.93	1.08	1.21	0.95	1.10	1.18
150	29.53	30.34	31.22	0.86	1.01	1.13	0.89	1.02	1.11
160	33.69	34.44	35.26	0.83	0.97	1.09	0.85	0.98	1.06
170	37.31	38.03	38.79	0.80	0.93	1.05	0.81	0.94	1.02
180	40.52	41.21	41.93	0.77	0.90	1.02	0.78	0.90	0.99
190	43.43	44.09	44.80	0.75	0.88	0.99	0.76	0.88	0.97
200	46.17	46.86	47.59	0.72	0.85	0.96	0.73	0.84	0.94
220	51.97	52.73	53.70	0.67	0.79	0.90	0.68	0.79	0.88
240	59.92	61.18	62.75	0.63	0.74	0.84	0.63	0.73	0.83
260	73.16	70.51	68.01	0.58	0.69	0.80	0.59	0.68	0.78
280	60.49	59.82	59.05	0.54	0.64	0.75	0.54	0.64	0.73
300	56.03	55.80	55.41	0.50	0.60	0.70	0.50	0.59	0.68
320	53.89	53.65	53.45	0.46	0.56	0.65	0.46	0.56	0.63
350	51.62	51.56	51.48	0.41	0.51	0.59	0.42	0.52	0.58
400	50.10	50.09	50.08	0.35	0.44	0.51	0.36	0.46	0.49
450	49.63	49.65	49.70	0.29	0.37	0.42	0.30	0.40	0.41
500	49.65	49.73	49.75	0.25	0.33	0.37	0.27	0.37	0.35
550	50.06	50.14	50.19	0.21	0.29	0.32	0.24	0.33	0.30
600	50.59	50.63	50.73	0.18	0.26	0.28	0.21	0.30	0.26
650	51.66	51.79	51.96	0.17	0.24	0.26	0.20	0.29	0.24
700	52.57	52.77	52.89	0.14	0.21	0.23	0.18	0.26	0.21
750	54.31	54.66	54.84	0.12	0.20	0.21	0.16	0.23	0.19
800	56.87	57.46	58.08	0.11	0.18	0.20	0.15	0.22	0.18
850	62.11	63.44	64.72	0.10	0.17	0.19	0.15	0.21	0.17
900	69.18	65.64	62.10	0.10	0.17	0.19	0.14	0.20	0.17
1000	46.59	45.31	43.71	0.10	0.17	0.21	0.15	0.21	0.19
1100	30.14	28.15	25.64	0.22	0.36	0.53	0.27	0.40	0.51
1200	15.10	15.60	15.57	0.77	0.83	1.00	0.84	0.89	1.00

Typical Performance Data


FREQ. (MHz)	GROUP DELAY		
	(nsec)		
	@-55°C	@+25°C	@+125°C
10	6.31	6.39	6.48
11	6.30	6.39	6.48
12	6.30	6.39	6.48
13	6.30	6.39	6.48
14	6.30	6.39	6.48
15	6.30	6.39	6.48
16	6.30	6.39	6.48
17	6.31	6.39	6.49
18	6.31	6.40	6.49
19	6.31	6.40	6.50
20	6.32	6.40	6.50
21	6.32	6.41	6.50
22	6.33	6.41	6.51
23	6.33	6.42	6.51
24	6.34	6.42	6.52
25	6.34	6.43	6.53
26	6.35	6.45	6.54
27	6.37	6.46	6.55
28	6.38	6.47	6.57
29	6.40	6.48	6.58
30	6.42	6.50	6.60
31	6.43	6.52	6.62
32	6.45	6.54	6.64
33	6.47	6.56	6.66
34	6.49	6.58	6.68
35	6.52	6.61	6.71
36	6.55	6.63	6.74
37	6.57	6.66	6.76
38	6.60	6.69	6.80
39	6.63	6.72	6.82
40	6.67	6.76	6.86
41	6.70	6.79	6.90
42	6.74	6.82	6.93
43	6.77	6.86	6.98
44	6.82	6.90	7.02
45	6.86	6.95	7.06
46	6.90	7.00	7.11
47	6.95	7.05	7.16
50	7.10	7.20	7.32
52	7.21	7.31	7.44

Typical Performance Curves

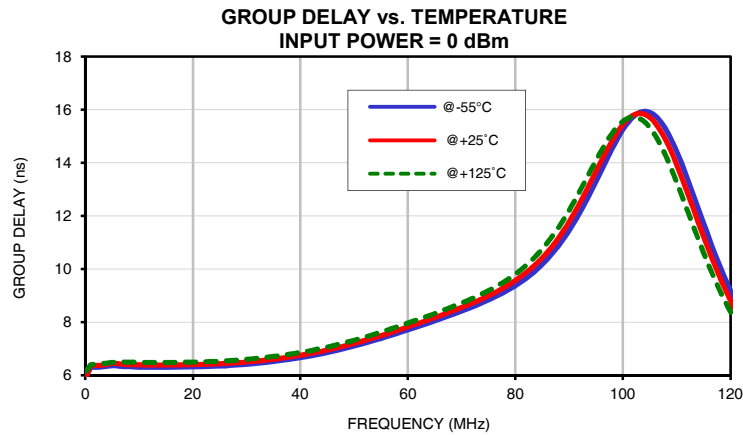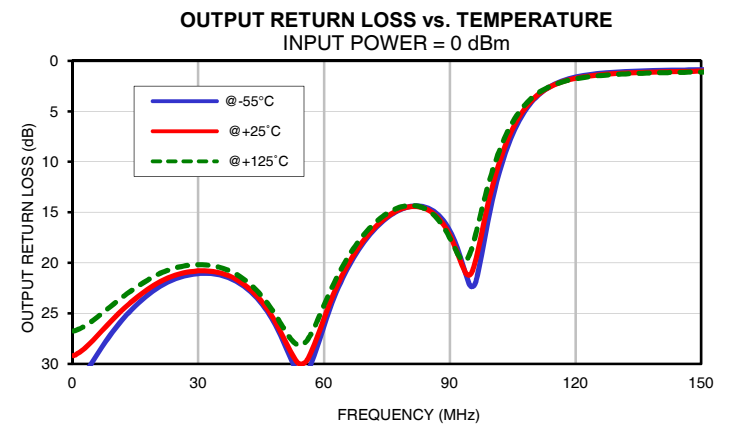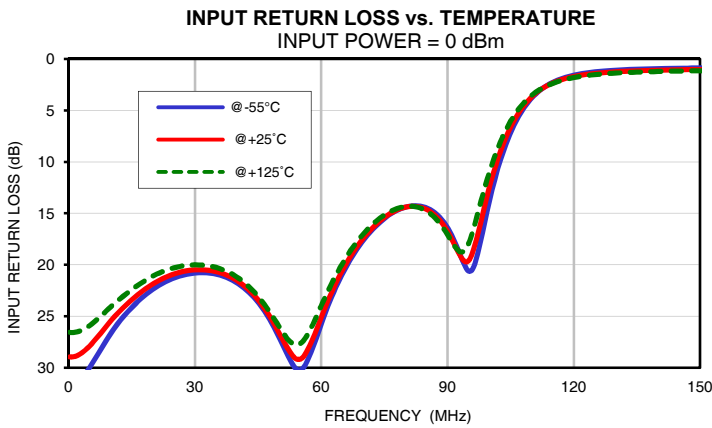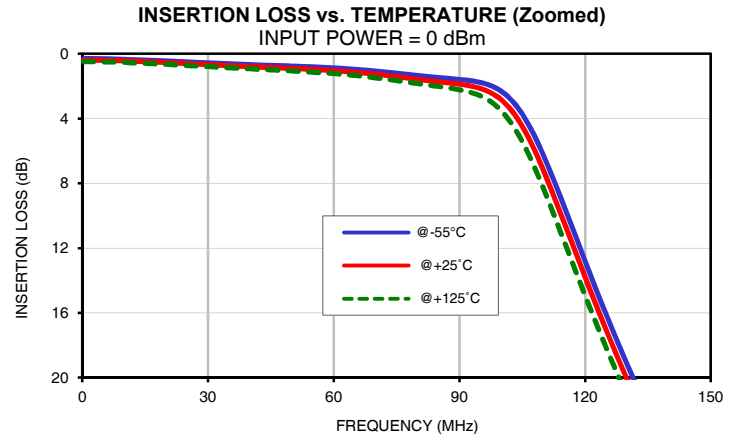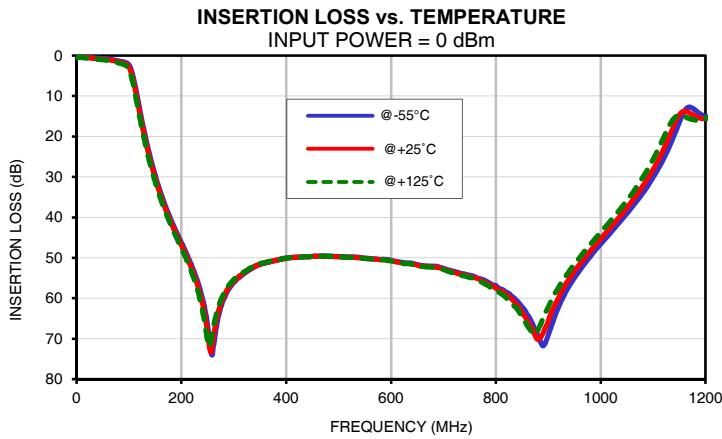


Outline Dimensions

JV1210C

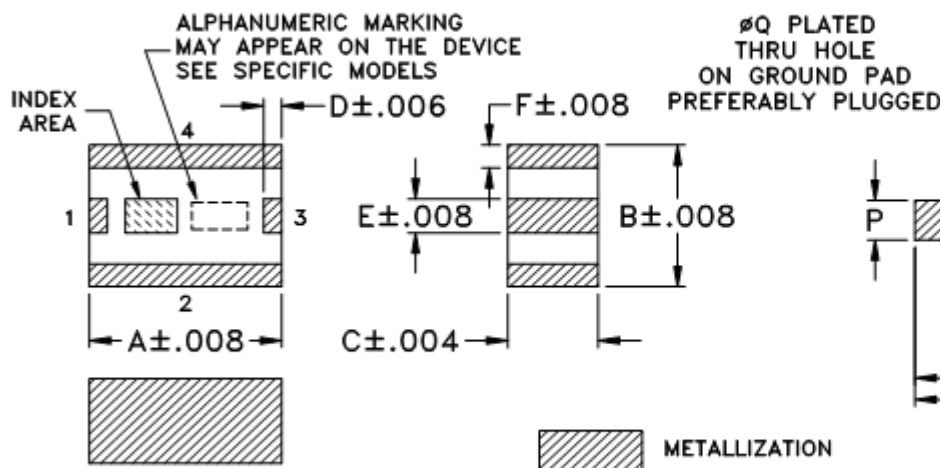

PCB Land Pattern

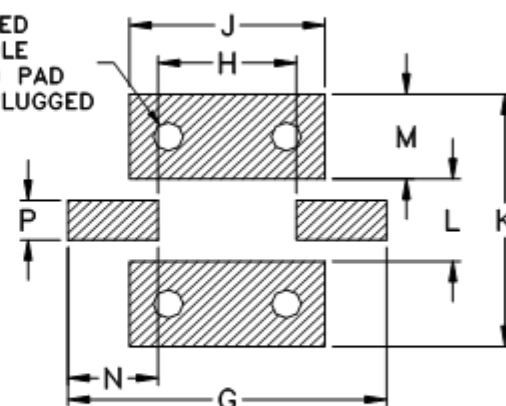

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT. GRAM
JV1210C	.126 (3.2)	.098 (2.5)	.059 (1.5)	.012 (.3)	.024 (.6)	.016 (.4)	.209 (5.3)	.091 (2.3)	.128 (3.25)	.175 (4.45)	.057 (1.45)	.059 (1.5)	.059 (1.5)	.028 (.7)	.020 (.5)	.03

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Open style, ceramic base.
2. Termination finish: **as shown below or indicated on Data Sheet.**
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
3. Pad tolerance is non-cumulative. Minimum spacing between each pad is .004.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F74

DEVICE ORIENTATION IN T&R

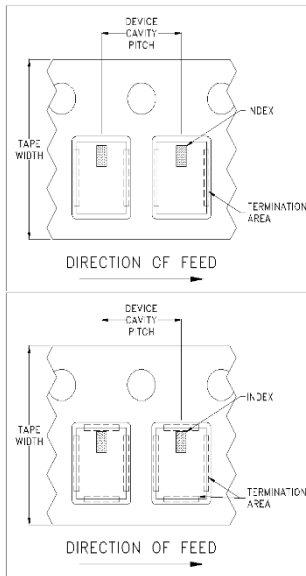


ILLUSTRATION 1




ILLUSTRATION 2




ILLUSTRATION 3

Applicable Case Styles
GE0805C-1
GE0805C-1AP
JV1210C-1
GU2939

Applicable Case Styles
JV1210C
JV1210C-2
JV1210C-3
JV1210C-4
JV1210C-5
JV1210C-6
JV1210C-11

Applicable Case Styles
JC0603C-8
JC0603C-9
JV1210C-7
JV1210C-8
JV1210C-9
JV1210C-10
JV1210C-13
GE0805C-13
GE0805C-19
GE0805C-20

Tape Width, mm	Device Cavity Pitch, mm	Real Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	2000
				4000

Note: Small reel availability varies by model. Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

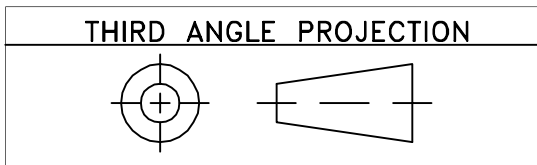

REVISIONS					
REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M123026	NEW RELEASE	06/08/09	PW	ABD

**SUGGESTED MOUNTING CONFIGURATION
FOR JV1210C CASE STYLE, "04FL01" PIN CONNECTIONS**

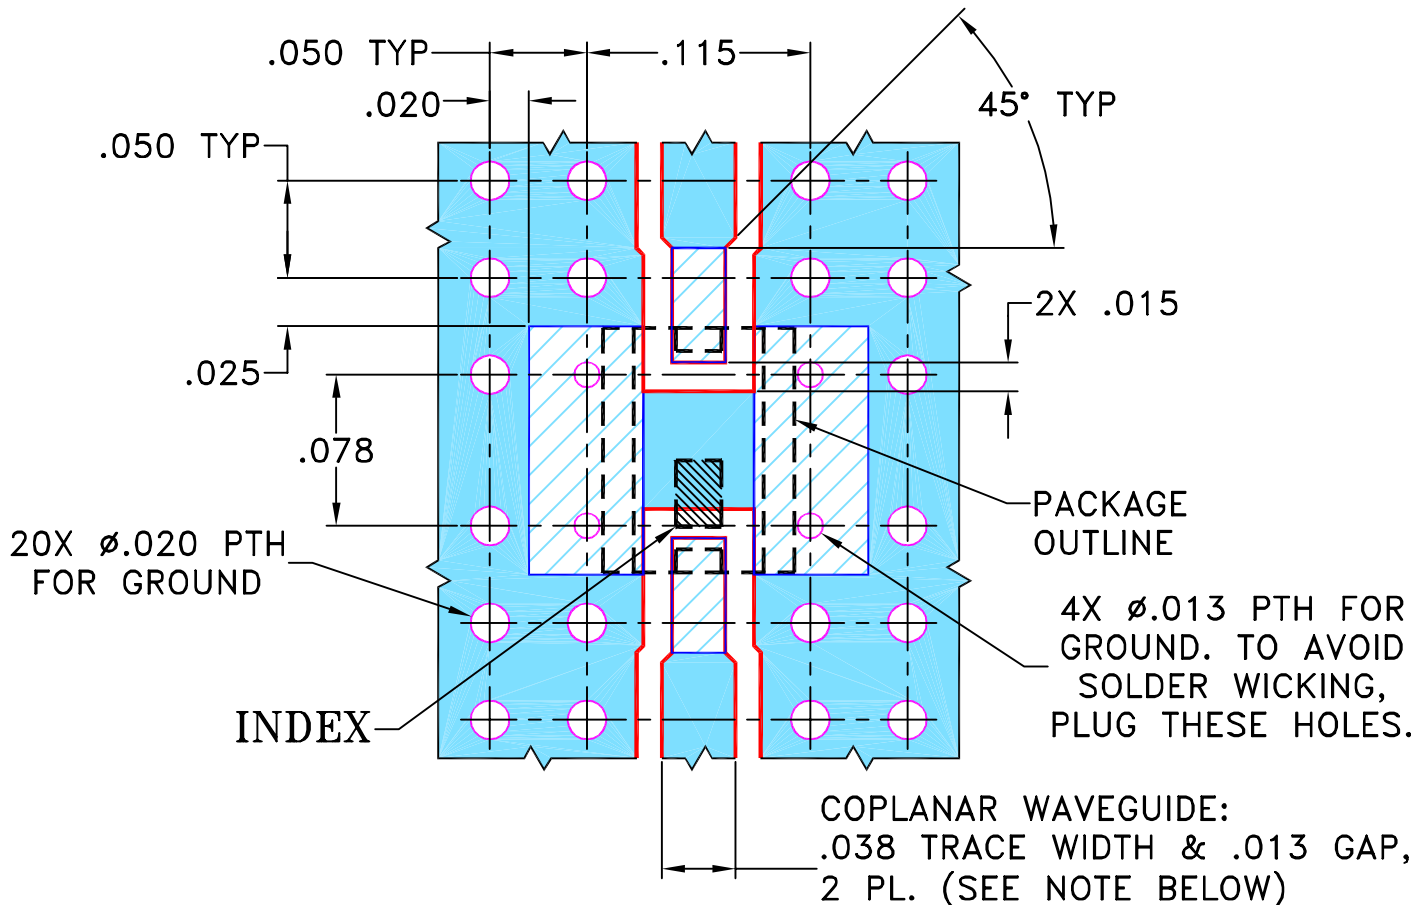

NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN PW	05/27/09
TOLERANCES ON:	CHECKED IL	06/04/09
2 PL DECIMALS ±	APPROVED ABD	06/08/09
3 PL DECIMALS ± .005		
ANGLES ±		
FRACTIONS ±		



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235


PL, 04FL01, JV1210C, LFCF, TB-526+

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-307	OR
FILE:	98PL307	SCALE:	10:1
		SHEET:	1 OF 1

Evaluation Board and Circuit

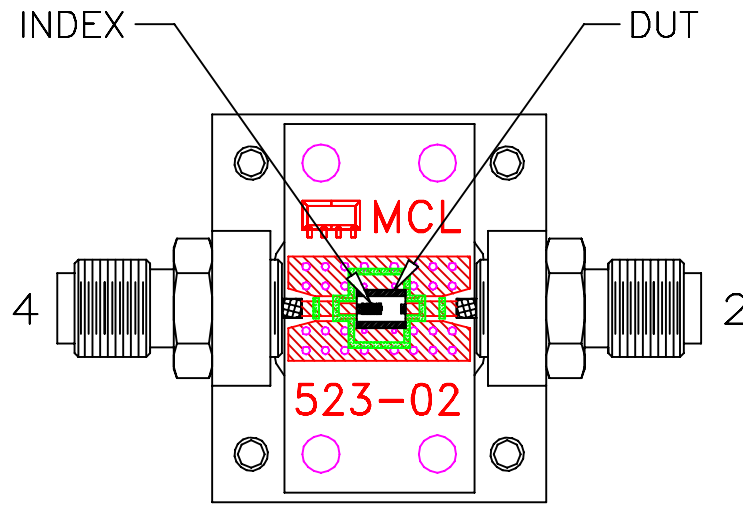


TB-526+

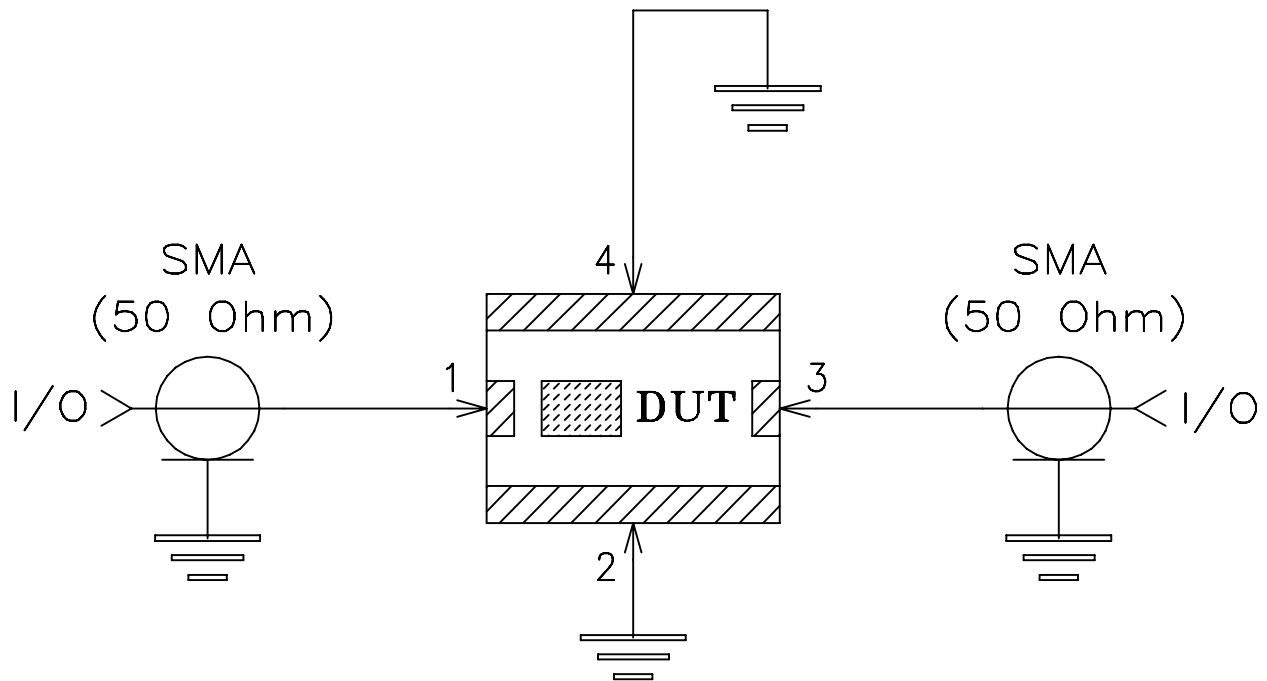

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A