

Coaxial High Pass Filter

50Ω 225 to 3000 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- rugged shielded case
- other standard and custom NHP models available with wide selection of fco

Applications

- lab use
- transmitters/receivers
- radio communications

NHP-250+



Generic photo used for illustration purposes only

CASE STYLE: FF57

Connectors Model
N-Type NHP-250+


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

High Pass Filter Electrical Specifications

STOPBAND (MHz)	fco (MHz) Nom.	PASSBAND (MHz)	VSWR (:1)
(loss > 40 dB)	(loss 3 dB)	(loss < 1 dB)	Stopband Typ. Passband Typ.
DC-100	100-150	205	225-3000
			17 1.3


Outline Drawing

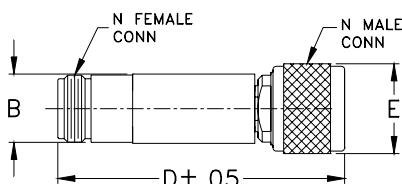


Outline Dimensions (inch/mm)

B	D	E	wt
.67	2.90	.82	grams
17.02	73.66	20.83	90.0

typical frequency response





electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) $\bar{x}$	Insertion Loss (dB) σ	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
10.00	72.15	5.67	0.03	100.00	2.23
100.00	57.26	0.27	0.08	129.00	2.63
129.00	41.25	0.45	0.17	130.00	2.59
130.00	40.71	0.46	0.18	140.00	2.90
140.00	35.39	0.54	0.20	150.00	3.17
150.00	30.09	0.62	0.22	160.00	3.63
160.00	24.78	0.73	0.26	166.00	4.00
166.00	21.57	0.80	0.29	170.00	4.32
170.00	19.43	0.85	0.34	180.00	5.39
180.00	14.04	0.97	0.53	190.00	7.09
190.00	8.77	1.03	1.02	199.00	9.19
199.00	4.65	0.89	2.21	200.00	9.41
200.00	4.26	0.86	2.43	201.00	9.63
201.00	3.90	0.83	2.67	202.00	9.83
202.00	3.56	0.79	2.93	203.00	10.02
203.00	3.24	0.75	3.23	204.00	10.18
204.00	2.94	0.70	3.56	205.00	10.32
205.00	2.66	0.66	3.91	206.00	10.43
206.00	2.41	0.61	4.31	210.00	10.58
210.00	1.60	0.42	6.27	225.00	8.03
225.00	0.55	0.03	23.49	300.00	2.94
300.00	0.30	0.02	30.05	400.00	1.59
500.00	0.19	0.00	33.64	500.00	1.09
600.00	0.19	0.00	30.85	600.00	0.83
700.00	0.19	0.01	28.81	700.00	0.67
800.00	0.20	0.01	28.48	800.00	0.58
900.00	0.20	0.01	29.04	900.00	0.52
1000.00	0.20	0.00	29.79	1000.00	0.47
2000.00	0.29	0.00	27.11	2000.00	0.34
3000.00	0.51	0.02	16.22	3000.00	0.32

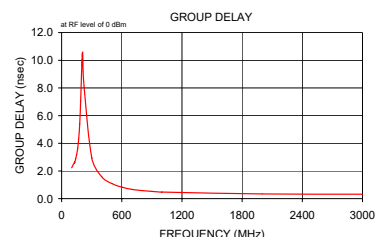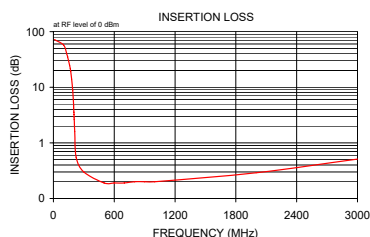

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
M151107
NHP-250+
200515

Coaxial High Pass Filter

NHP-250+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	FREQUENCY (MHz)	GROUP DELAY (nsec)
10.0	72.15	0.03	100.0	2.230
100.0	57.26	0.08	129.0	2.630
129.0	41.25	0.17	130.0	2.590
130.0	40.71	0.18	140.0	2.900
140.0	35.39	0.20	150.0	3.170
150.0	30.09	0.22	160.0	3.630
160.0	24.78	0.26	166.0	4.000
166.0	21.57	0.29	167.0	4.070
167.0	21.04	0.31	170.0	4.320
170.0	19.43	0.34	180.0	5.390
180.0	14.04	0.53	185.0	6.140
185.0	11.37	0.71	186.0	6.310
186.0	10.84	0.76	187.0	6.490
187.0	10.31	0.82	188.0	6.690
188.0	9.80	0.88	189.0	6.890
189.0	9.28	0.94	190.0	7.090
190.0	8.77	1.02	199.0	9.190
199.0	4.65	2.21	200.0	9.410
200.0	4.26	2.43	201.0	9.630
201.0	3.90	2.67	202.0	9.830
202.0	3.56	2.93	203.0	10.020
203.0	3.24	3.23	204.0	10.180
204.0	2.94	3.56	205.0	10.320
205.0	2.66	3.91	206.0	10.430
206.0	2.41	4.31	207.0	10.510
207.0	2.17	4.73	208.0	10.560
208.0	1.96	5.20	209.0	10.580
209.0	1.77	5.71	210.0	10.580
210.0	1.60	6.27	211.0	10.540
212.0	1.30	7.51	212.0	10.470
213.0	1.18	8.21	213.0	10.370
214.0	1.08	8.97	214.0	10.240
215.0	0.99	9.78	215.0	10.090
216.0	0.90	10.65	216.0	9.920
225.0	0.55	23.49	225.0	8.030
250.0	0.42	17.28	250.0	4.820
300.0	0.30	30.05	300.0	2.940
350.0	0.28	28.44	350.0	2.070
400.0	0.23	27.07	400.0	1.590
450.0	0.21	30.82	450.0	1.290
500.0	0.19	33.64	500.0	1.090
550.0	0.19	33.90	550.0	0.940
600.0	0.19	30.85	600.0	0.830
650.0	0.19	29.50	650.0	0.740
700.0	0.19	28.81	700.0	0.670
750.0	0.19	28.39	750.0	0.630
800.0	0.20	28.48	800.0	0.580
850.0	0.20	28.65	850.0	0.550
900.0	0.20	29.04	900.0	0.520
950.0	0.20	29.40	950.0	0.490
1000.0	0.20	29.79	1000.0	0.470
1500.0	0.24	29.34	1500.0	0.370
2000.0	0.29	27.11	2000.0	0.340
2500.0	0.38	21.50	2500.0	0.330
3000.0	0.51	16.22	3000.0	0.320

REV. X1
NHP-250+
070628
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Curves

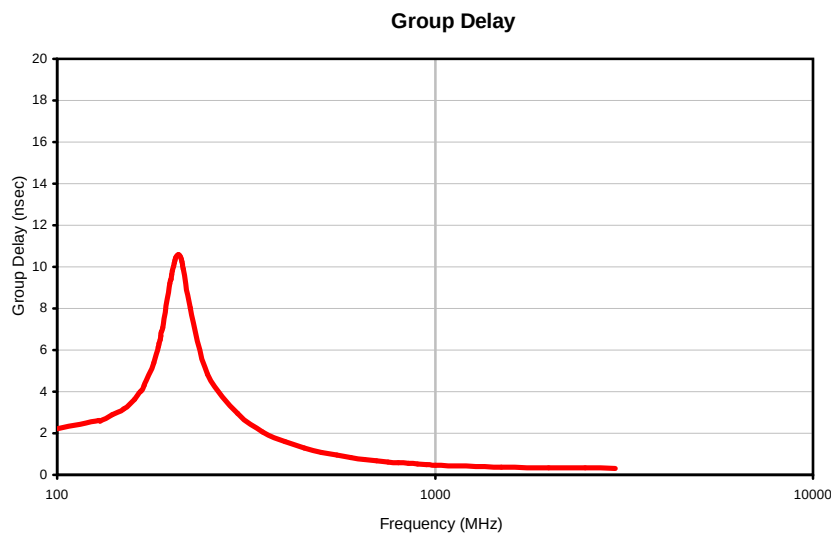

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X1
NHP-250+
070628
Page 1 of 1

Outline Dimensions

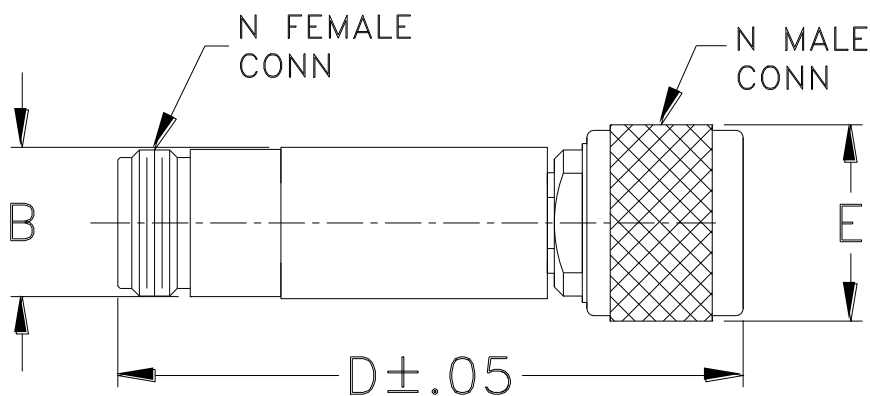

CASE #.	A	B	C	D	E	WT GRAMS
FF57	--	.70 (17.78)	--	2.90 (73.66)	.82 (20.83)	90.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

1. Case material: Stainless steel.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I