

Ultra High Dynamic Range Monolithic Amplifier

PHA-1H-6+

50Ω 0.05 to 6 GHz

The Big Deal

- Ultra High IP3
- Broadband High Dynamic Range without external Matching Components
- Operates to 105°C
- May be used as a replacement to WJ AH1^{a,b}
- Suitable for low phase noise applications



SOT-89 PACKAGE

Product Overview

PHA-1H-6+ (RoHS compliant) is an advanced wideband amplifier fabricated using E-PHEMT technology and offers extremely high dynamic range over a broad frequency range and with low noise figure. In addition, the PHA-1H-6+, unlike competitive models, has good input and output return loss over a broad frequency range without the need for external matching components and has demonstrated excellent reliability. It has repeatable performance from lot to lot and is enclosed in a SOT-89 package for very good thermal performance.

Key Features

Feature	Advantages
Broad Band: 0.05 to 6.0 GHz	Broadband covering primary wireless communications bands: Cellular, PCS, LTE, WiMAX
Extremely High IP3 Versus DC power Consumption 40.4 dBm typical at 2.4 GHz	The PHA-1H-6+ matches industry leading IP3 performance relative to device size and power consumption. The combination of the design and E-PHEMT Structure provides enhanced linearity over a broad frequency range as evidence in the IP3 being typically 20 dB above the P 1dB point. This feature makes this amplifier ideal for use in: <ul style="list-style-type: none">• Driver amplifiers for complex waveform up converter paths• Drivers in linearized transmit systems• Secondary amplifiers in ultra High Dynamic range receivers
No External Matching Components Required	Unlike competing products, Mini-Circuits PHA-1H-6+ provides Input and Output Return Loss of 10-23 dB up to 4 GHz without the need for any external matching components
Low Noise Figure: 2.6dB typ. up to 4 GHz 3.4dB typ. up to 6 GHz	A unique feature of the PHA-1H-6+ which separates this design from all competitors is the low noise figure performance in combination with the high dynamic range.
Low Junction Temperature $T_j=115^\circ\text{C}$ at 85°C lead temperature and 135°C at 105°C lead temperature	Results in excellent reliability.
Low additive phase noise, typically -164 dBc/Hz @ 10 KHz offset	Ideal for low phase noise synthesizer applications

Notes:

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

b. The WJ AH1 part number is used for identification and comparison purposes only.



www.minicircuits.com

P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Page 1 of 6

Ultra High Dynamic Range Monolithic Amplifier

0.05-6 GHz

Product Features

- High IP3, 40.4 dBm typ. at 2.4 GHz
- Gain, 13.8 dB typ. at 2 GHz
- High Pout, P1dB 22 dBm typ. at 2 GHz
- Low noise figure, 2.2 dB @2 GHz
- No external matching components required
- May be used as replacement for WJ AH1^{a,b}



Generic photo used for illustration purposes only

CASE STYLE: DF782

Typical Applications

- Base station infrastructure
- Portable Wireless
- CATV & DBS
- MMDS & Wireless LAN
- LTE

PHA-1H-6+



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

PHA-1H-6+ (RoHS compliant) is an advanced wideband amplifier fabricated using E-PHEMT technology and offers extremely high dynamic range over a broad frequency range and with low noise figure. In addition, the PHA-1H-6+ has good input and output return loss over a broad frequency range without the need for external matching components. It has repeatable performance from lot to lot and is enclosed in a SOT-89 package for very good thermal performance.

simplified schematic and pin description

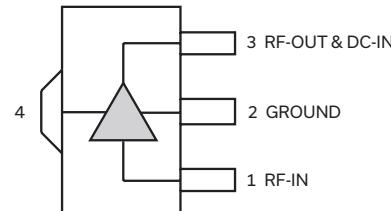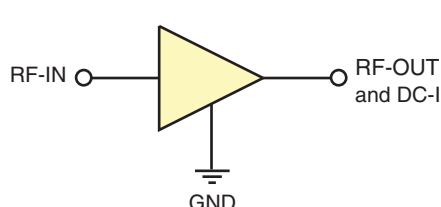

Function	Pin Number	Description
RF IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit", Fig. 2
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.

Notes:

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.

b. The WJ AH1 part number is used for identification and comparison purposes only.

Electrical Specifications at 25°C, unless noted

Parameter	Condition (GHz)	Vd=5.0V ¹			Units
		Min.	Typ.	Max.	
Frequency range		0.05	0.05	6.0	GHz
Gain	0.05	15.9	17.7	19.5	dB
	0.8	14.3	15.9	17.5	
	2.0	—	13.8	—	
	3.0	—	12.1	—	
	4.0	9.8	10.9	12.0	
	6.0	—	9.6	—	
Input return loss	0.05	—	11.9	—	dB
	0.8	13.0	18.2	—	
	2.0	—	12.5	—	
	3.0	—	10.8	—	
	4.0	—	10.3	—	
	6.0	—	8.1	—	
Output return loss	0.05	—	14.2	—	dB
	0.8	13.0	22.9	—	
	2.0	—	19.7	—	
	3.0	—	17.1	—	
	4.0	—	15.5	—	
	6.0	—	13.7	—	
Reverse isolation	2.0		19.6		dB
Output power @ 1 dB compression	0.05	20.0	22.1	—	dBm
	0.8	20.0	21.8	—	
	2.0	20.0	22.6	—	
	3.0	—	22.2	—	
	4.0	—	22.5	—	
	6.0	—	22.0	—	
Output IP3	0.05	—	39.6	—	dBm
	0.8	38.0	40.6	—	
	2.0	—	40.4	—	
	3.0	—	40.8	—	
	4.0	—	41.4	—	
	6.0	—	41.0	—	
Noise figure	0.5		1.7		dB
	1.0		1.8		
	2.0		2.2		
	3.0		2.4		
	4.0		2.6		
	6.0		3.4		
Additive Phase Noise	2 GHz, 10 KHz offset		-164.1		dBc/Hz
Device operating voltage		4.8	5.0	5.2	V
Device operating current		—	132	165	mA
Device current variation vs. temperature ²			101		µA/°C
Device current variation vs voltage			0.057		mA/mV
Thermal resistance, junction-to-ground lead at 88°C			36.1		°C/W

1. Measured on Mini-Circuits characterization test board TB-313. See characterization test circuit (Fig. 1)


2. (Current at 85°C — Current at -45°C)/130

Absolute Maximum Ratings³

Parameter	Ratings
Operating temperature (ground lead)	-40°C to 105°C
Storage temperature	-65°C to 150°C
Operating current at 5V	210 mA
Power dissipation	1 W
Input power (CW)	24 dBm
DC voltage on Pin 3	6 V

3. Permanent damage may occur if any of these limits are exceeded.

Electrical maximum ratings are not intended for continuous normal operation.

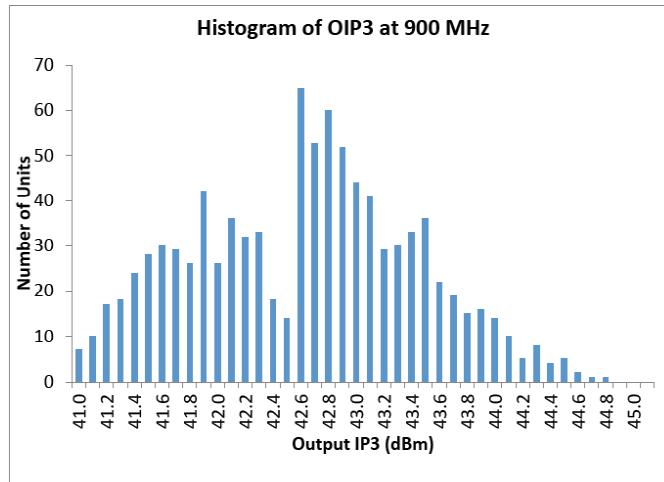

Characterization Test Circuit

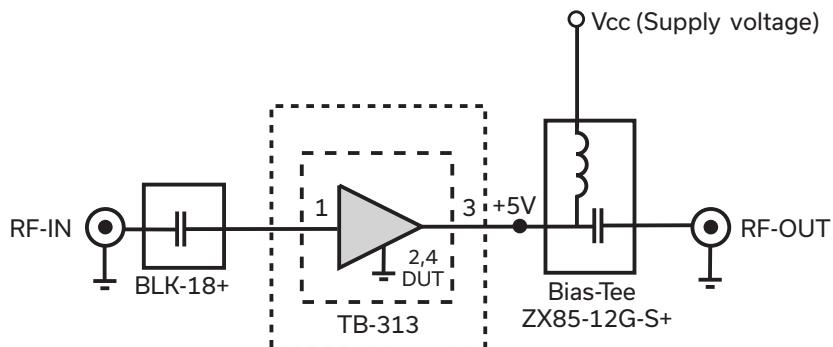


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-313)

Gain, Return loss, Output power at 1dB compression (P1 dB), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: Pin= -25dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 5 dBm/tone at output.

Recommended Application Circuit


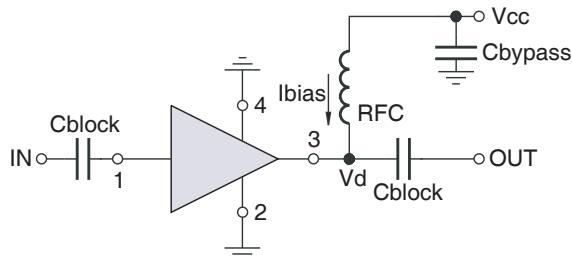


Fig 2. Test Board includes case, connectors, and components soldered to PCB

Product Marking



Marking may contain other features or characters for internal lot control

Additional Detailed Technical Information

additional information is available on our dash board. To access this information [click here](#)


Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 (SOT 89) Plastic package, exposed paddle lead finish: Matte-Tin
Tape & Reel	F55
Standard quantities available on reel	7" reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL-313
Evaluation Board	TB-545-1H+
Environmental Ratings	ENV08T8

ESD Rating

Human Body Model (HBM): Class 1B (500 to <1000V) in accordance with ANSI/ESD STM 5.1 - 2001
 Machine Model (MM): Class M1 (pass 25V) in accordance with ANSI/ESD STM5.2-1999









MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

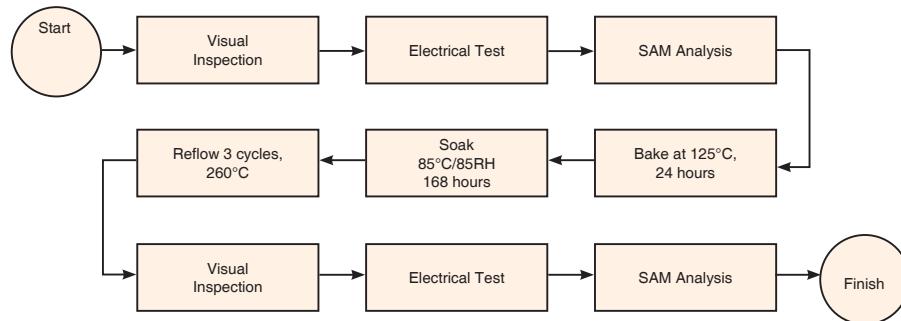MSL Test Flow Chart**Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Typical Performance Curves

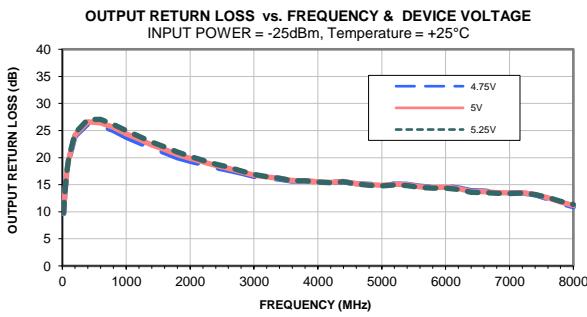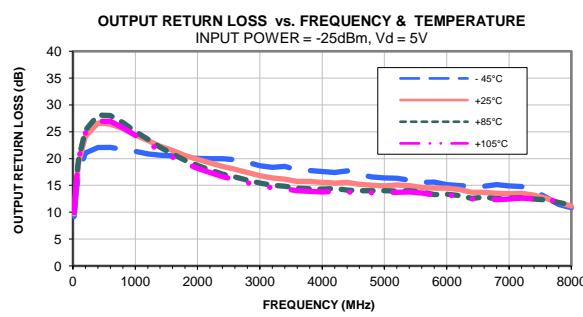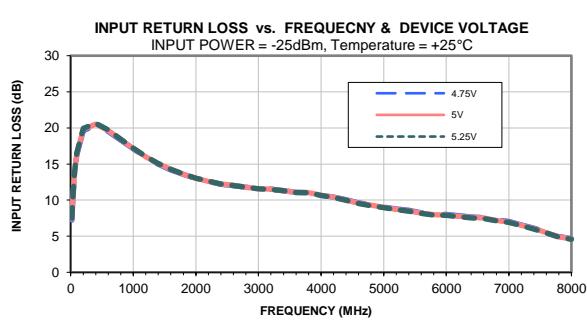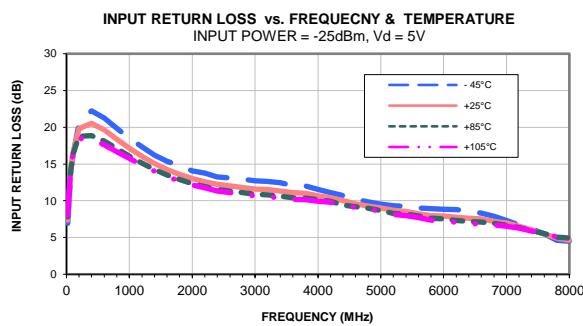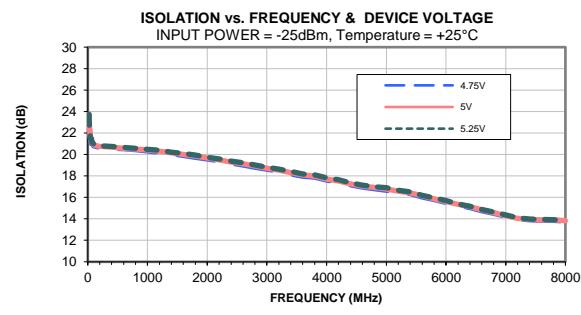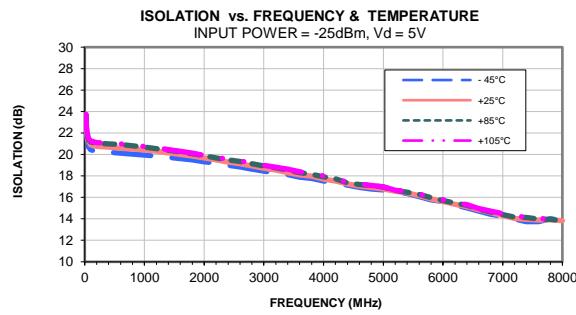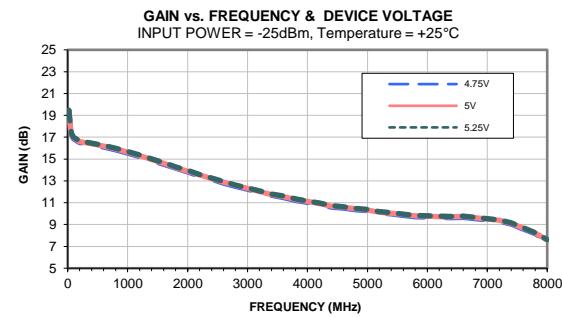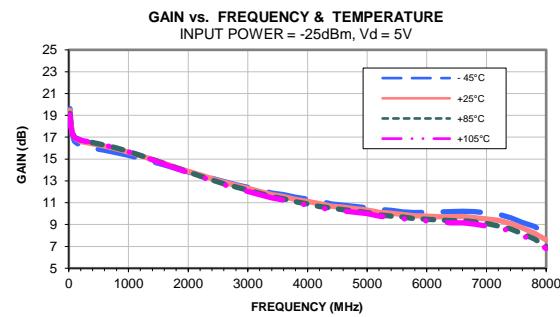

Mini-Circuits®

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
www.minicircuits.com



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

minicircuits.com








REV. OR

PHA-1H-6+

9/13/2021

Page 1 of 2

Typical Performance Curves

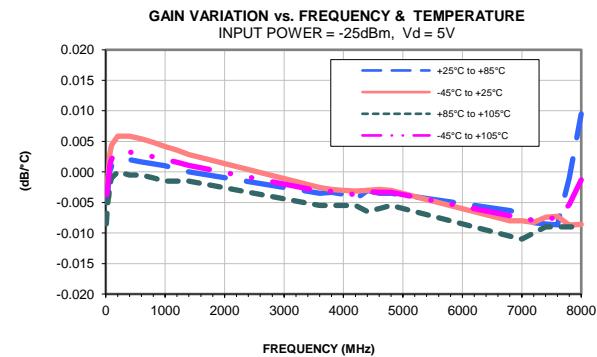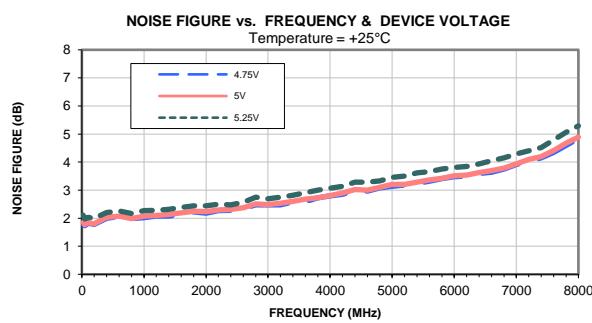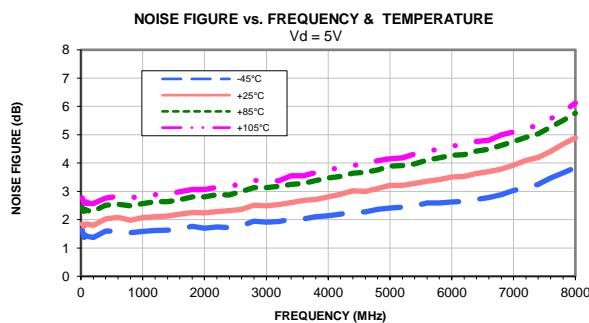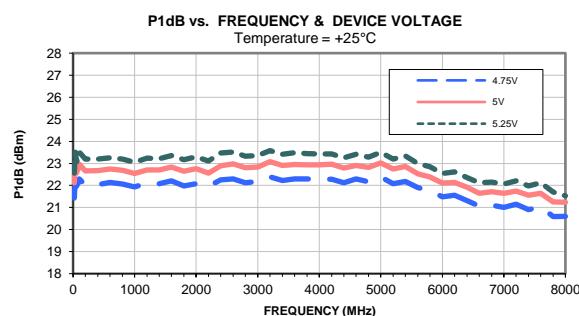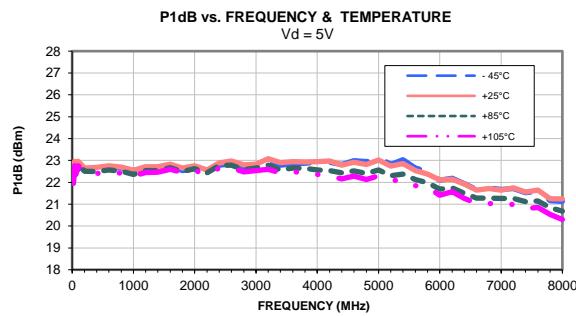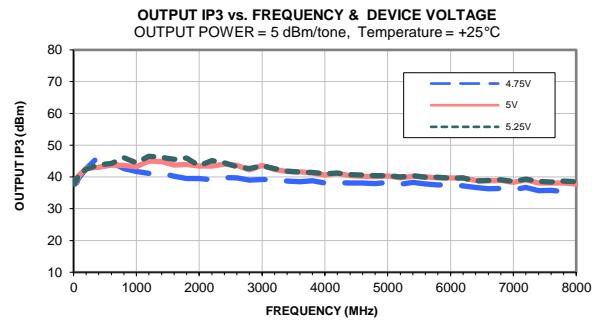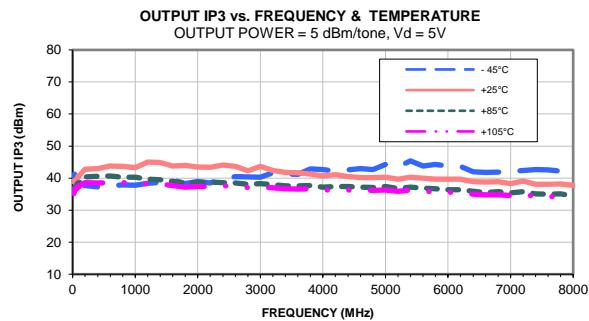

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 134.69 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.46	23.74	7.35	9.70	0.90	0.69	38.74	22.12	1.85
30	18.68	22.49	9.08	11.45	0.92	0.67	39.26	22.80	1.85
40	18.11	21.81	10.67	13.11	0.96	0.65	39.00	22.96	1.82
50	17.71	21.33	12.10	14.56	0.99	0.63	38.54	22.68	1.76
60	17.42	21.37	13.22	15.96	1.02	0.65	39.62	22.57	1.82
70	17.24	21.13	14.24	16.97	1.04	0.64	39.57	22.73	1.84
80	17.10	21.04	15.11	17.99	1.05	0.63	39.96	22.77	1.84
90	17.00	20.95	15.86	18.82	1.06	0.63	40.62	22.76	1.84
100	16.92	20.89	16.48	19.59	1.07	0.63	40.68	22.96	1.84
200	16.61	20.76	19.79	24.15	1.10	0.63	42.77	22.66	1.80
400	16.39	20.70	20.53	26.61	1.11	0.64	42.99	22.68	2.03
600	16.18	20.57	19.63	26.42	1.12	0.65	43.74	22.75	2.08
800	15.93	20.52	18.38	25.57	1.12	0.67	43.66	22.69	1.98
1000	15.63	20.43	17.17	24.39	1.13	0.69	43.25	22.55	2.07
1200	15.31	20.29	16.02	23.38	1.14	0.71	45.00	22.71	2.10
1400	14.96	20.15	15.06	22.33	1.14	0.73	44.89	22.71	2.13
1600	14.60	20.00	14.26	21.50	1.15	0.75	43.74	22.83	2.19
1800	14.24	19.85	13.58	20.56	1.15	0.77	43.96	22.65	2.25
2000	13.89	19.67	13.03	19.83	1.15	0.79	43.45	22.76	2.24
2200	13.54	19.50	12.60	19.20	1.16	0.81	43.40	22.56	2.29
2400	13.21	19.29	12.23	18.55	1.16	0.82	44.03	22.89	2.32
2600	12.87	19.13	12.04	18.03	1.16	0.84	43.68	22.98	2.37
2800	12.58	18.93	11.81	17.40	1.16	0.85	42.22	22.80	2.51
3000	12.31	18.73	11.57	16.79	1.16	0.85	43.63	22.83	2.49
3200	12.03	18.55	11.52	16.41	1.16	0.86	42.35	23.08	2.53
3400	11.75	18.30	11.31	16.19	1.15	0.87	41.75	22.90	2.60
3600	11.56	18.10	11.09	15.75	1.14	0.87	41.62	22.95	2.68
3800	11.30	17.98	11.04	15.72	1.15	0.88	41.26	22.93	2.72
4000	11.11	17.72	10.66	15.54	1.14	0.88	40.64	22.94	2.80
4200	10.93	17.54	10.41	15.43	1.13	0.89	41.08	22.97	2.90
4400	10.68	17.27	10.02	15.58	1.12	0.90	40.44	22.79	3.02
4600	10.58	17.05	9.59	15.18	1.09	0.90	40.21	22.91	3.00
4800	10.45	16.92	9.29	15.01	1.08	0.91	40.12	22.82	3.10
5000	10.33	16.79	9.00	14.92	1.06	0.92	40.31	23.02	3.21
5200	10.14	16.58	8.73	15.06	1.05	0.93	39.70	22.74	3.21
5400	10.05	16.43	8.53	14.99	1.04	0.94	40.26	22.86	3.28
5600	9.91	16.15	8.22	14.62	1.01	0.94	40.00	22.53	3.36
5800	9.79	15.85	7.99	14.48	0.99	0.94	39.70	22.38	3.42
6000	9.76	15.63	7.95	14.51	0.98	0.94	39.71	22.11	3.51
6200	9.72	15.34	7.77	14.28	0.95	0.93	39.62	22.14	3.53
6400	9.71	15.13	7.61	13.73	0.92	0.93	38.89	21.92	3.63
6600	9.74	14.84	7.53	13.70	0.90	0.91	38.81	21.65	3.70
6800	9.63	14.59	7.20	13.52	0.88	0.91	38.86	21.72	3.79
7000	9.50	14.32	6.98	13.47	0.87	0.91	38.29	21.65	3.93
7200	9.38	14.05	6.52	13.51	0.86	0.91	39.10	21.74	4.09
7400	9.11	13.94	6.06	13.19	0.85	0.92	38.08	21.56	4.20
7600	8.68	13.90	5.51	12.59	0.85	0.95	38.05	21.64	4.41
7800	8.22	13.91	4.92	11.79	0.85	0.99	38.14	21.25	4.67
8000	7.59	13.83	4.62	11.17	0.87	1.00	37.75	21.24	4.89



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
www.minicircuits.com
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 1 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 120.33 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.41	23.76	7.23	9.65	0.89	0.70	37.67	21.43	1.79
30	18.64	22.40	8.93	11.35	0.91	0.67	38.68	22.13	1.84
40	18.06	21.80	10.52	12.99	0.96	0.66	38.18	22.28	1.78
50	17.65	21.39	11.96	14.48	0.99	0.64	38.19	22.02	1.73
60	17.36	21.01	13.18	15.88	1.01	0.62	39.04	21.98	1.77
70	17.17	21.02	14.07	16.84	1.03	0.63	39.03	22.07	1.81
80	17.03	20.96	14.94	17.82	1.05	0.63	39.69	22.10	1.80
90	16.93	20.89	15.70	18.68	1.06	0.63	40.38	22.13	1.79
100	16.84	20.81	16.32	19.41	1.06	0.63	39.97	22.30	1.82
200	16.52	20.66	19.62	23.93	1.10	0.63	42.60	22.02	1.78
400	16.31	20.58	20.35	26.22	1.11	0.64	46.42	22.03	1.99
600	16.10	20.53	19.52	25.91	1.12	0.65	44.65	22.14	2.06
800	15.84	20.45	18.30	25.00	1.12	0.67	42.62	22.07	1.98
1000	15.55	20.34	17.10	23.76	1.13	0.69	41.77	21.94	2.02
1200	15.22	20.21	15.97	22.75	1.13	0.71	41.16	22.11	2.08
1400	14.88	20.07	15.00	21.72	1.14	0.73	41.20	22.08	2.07
1600	14.52	19.92	14.20	20.89	1.15	0.75	40.17	22.21	2.13
1800	14.16	19.74	13.54	20.00	1.15	0.77	39.50	21.98	2.22
2000	13.81	19.60	12.98	19.31	1.15	0.79	39.53	22.08	2.18
2200	13.45	19.42	12.58	18.72	1.16	0.81	39.15	21.96	2.27
2400	13.13	19.21	12.20	18.13	1.15	0.82	39.86	22.25	2.28
2600	12.79	19.01	12.03	17.69	1.16	0.83	39.74	22.30	2.35
2800	12.49	18.82	11.79	17.13	1.16	0.84	39.01	22.13	2.48
3000	12.23	18.62	11.57	16.57	1.15	0.85	39.19	22.18	2.47
3200	11.95	18.44	11.52	16.26	1.15	0.86	39.15	22.39	2.48
3400	11.67	18.20	11.31	16.04	1.15	0.86	38.68	22.23	2.58
3600	11.48	17.99	11.10	15.66	1.14	0.87	38.55	22.30	2.59
3800	11.22	17.88	11.05	15.69	1.15	0.88	38.77	22.30	2.73
4000	11.04	17.62	10.69	15.48	1.13	0.88	38.10	22.28	2.79
4200	10.85	17.42	10.42	15.43	1.13	0.89	38.20	22.28	2.85
4400	10.60	17.17	10.05	15.53	1.12	0.90	38.08	22.13	2.99
4600	10.50	16.95	9.63	15.19	1.09	0.90	38.11	22.29	2.97
4800	10.37	16.81	9.33	15.05	1.08	0.91	37.91	22.16	3.08
5000	10.26	16.68	9.04	14.99	1.06	0.92	38.28	22.38	3.14
5200	10.07	16.47	8.78	15.12	1.06	0.93	37.73	22.08	3.18
5400	9.97	16.36	8.58	15.07	1.05	0.94	38.28	22.18	3.24
5600	9.83	16.04	8.26	14.71	1.02	0.94	37.83	21.90	3.32
5800	9.72	15.79	8.04	14.56	0.99	0.94	37.51	21.76	3.41
6000	9.69	15.54	8.00	14.63	0.98	0.93	37.45	21.48	3.48
6200	9.65	15.26	7.83	14.41	0.95	0.93	37.18	21.55	3.50
6400	9.63	15.06	7.68	13.88	0.93	0.92	36.64	21.31	3.59
6600	9.66	14.75	7.60	13.84	0.91	0.91	36.27	21.06	3.64
6800	9.55	14.53	7.27	13.62	0.89	0.91	36.42	21.11	3.75
7000	9.43	14.26	7.04	13.53	0.88	0.91	36.00	21.01	3.91
7200	9.30	14.00	6.57	13.48	0.86	0.90	36.68	21.15	4.02
7400	9.03	13.92	6.12	13.10	0.86	0.92	35.73	20.91	4.15
7600	8.60	13.87	5.57	12.43	0.86	0.94	35.80	21.04	4.34
7800	8.15	13.86	4.96	11.60	0.86	0.97	35.37	20.59	4.60
8000	7.52	13.80	4.66	10.96	0.87	0.99	35.14	20.60	4.84



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 2 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 148.69 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.47	23.72	7.50	9.78	0.90	0.69	37.94	22.56	2.11
30	18.70	22.49	9.23	11.52	0.93	0.66	39.36	23.33	2.05
40	18.13	21.87	10.82	13.20	0.96	0.65	38.78	23.51	2.01
50	17.74	21.39	12.21	14.63	0.99	0.63	38.92	23.26	1.97
60	17.46	21.46	13.51	16.09	1.03	0.65	39.88	23.08	2.00
70	17.28	21.18	14.40	17.10	1.04	0.64	39.76	23.26	2.02
80	17.15	21.08	15.27	18.11	1.05	0.63	40.10	23.29	2.02
90	17.04	21.03	16.02	18.98	1.06	0.63	40.58	23.29	2.01
100	16.97	20.97	16.61	19.75	1.07	0.63	40.71	23.52	2.03
200	16.66	20.80	19.95	24.50	1.10	0.63	42.43	23.20	1.99
400	16.45	20.75	20.63	27.05	1.11	0.64	43.87	23.19	2.20
600	16.24	20.66	19.70	27.04	1.12	0.65	44.26	23.25	2.26
800	15.98	20.58	18.44	26.14	1.12	0.67	46.05	23.20	2.17
1000	15.69	20.48	17.20	24.97	1.13	0.69	44.44	23.05	2.27
1200	15.36	20.38	16.05	23.95	1.14	0.71	46.53	23.24	2.28
1400	15.02	20.21	15.07	22.87	1.14	0.73	46.18	23.21	2.32
1600	14.66	20.09	14.26	22.00	1.15	0.76	45.56	23.36	2.38
1800	14.30	19.94	13.60	21.02	1.16	0.78	45.91	23.17	2.44
2000	13.95	19.74	13.04	20.22	1.16	0.79	43.58	23.30	2.44
2200	13.59	19.59	12.61	19.51	1.16	0.81	45.19	23.11	2.50
2400	13.26	19.37	12.21	18.81	1.16	0.83	44.45	23.47	2.48
2600	12.93	19.23	12.03	18.23	1.17	0.84	43.21	23.52	2.57
2800	12.63	19.01	11.79	17.53	1.16	0.85	42.66	23.33	2.75
3000	12.36	18.80	11.56	16.89	1.16	0.86	43.57	23.36	2.69
3200	12.08	18.64	11.49	16.47	1.16	0.86	42.66	23.58	2.75
3400	11.80	18.41	11.29	16.22	1.16	0.87	41.84	23.42	2.82
3600	11.61	18.19	11.05	15.74	1.15	0.87	41.56	23.48	2.91
3800	11.35	18.10	11.02	15.71	1.16	0.88	41.45	23.45	3.00
4000	11.16	17.83	10.63	15.47	1.14	0.89	41.01	23.43	3.07
4200	10.97	17.64	10.36	15.38	1.13	0.89	41.27	23.43	3.14
4400	10.73	17.35	9.98	15.52	1.12	0.90	40.74	23.26	3.28
4600	10.62	17.14	9.54	15.12	1.09	0.91	40.63	23.41	3.28
4800	10.49	16.99	9.24	14.92	1.08	0.92	40.39	23.28	3.33
5000	10.38	16.89	8.95	14.80	1.06	0.93	40.39	23.50	3.45
5200	10.19	16.68	8.69	14.93	1.05	0.94	40.03	23.20	3.50
5400	10.10	16.52	8.48	14.86	1.04	0.94	40.41	23.34	3.61
5600	9.95	16.19	8.15	14.46	1.01	0.95	39.90	23.00	3.66
5800	9.84	15.94	7.93	14.33	0.99	0.95	39.88	22.85	3.75
6000	9.81	15.71	7.88	14.36	0.97	0.94	39.61	22.55	3.81
6200	9.77	15.39	7.71	14.13	0.94	0.93	39.67	22.61	3.84
6400	9.75	15.18	7.54	13.58	0.92	0.93	38.71	22.36	3.93
6600	9.78	14.89	7.46	13.51	0.90	0.92	38.89	22.12	4.05
6800	9.67	14.65	7.14	13.39	0.88	0.92	39.11	22.15	4.15
7000	9.55	14.36	6.91	13.35	0.86	0.92	38.60	22.07	4.29
7200	9.42	14.09	6.45	13.45	0.85	0.92	39.30	22.21	4.40
7400	9.15	13.97	6.00	13.19	0.85	0.93	38.61	21.98	4.52
7600	8.72	13.95	5.45	12.67	0.85	0.96	38.44	22.12	4.79
7800	8.26	13.92	4.86	11.91	0.84	1.00	38.71	21.70	5.06
8000	7.62	13.85	4.57	11.32	0.86	1.01	38.48	21.53	5.29



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 3 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 124.36 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.62	23.65	6.93	9.20	0.86	0.68	40.89	21.97	1.64
30	18.80	22.31	8.53	10.70	0.87	0.67	41.27	22.63	1.55
40	18.13	21.51	10.06	12.16	0.91	0.64	39.56	22.72	1.46
50	17.65	21.16	11.49	13.39	0.95	0.64	39.01	22.56	1.37
60	17.28	20.72	12.63	14.68	0.98	0.62	38.73	22.43	1.41
70	17.04	20.68	13.68	15.48	1.00	0.62	39.29	22.50	1.45
80	16.86	20.59	14.62	16.32	1.02	0.62	38.20	22.57	1.42
90	16.72	20.49	15.45	17.03	1.04	0.62	38.78	22.58	1.41
100	16.61	20.44	16.14	17.64	1.05	0.62	38.76	22.77	1.42
200	16.20	20.24	20.50	21.05	1.09	0.62	37.66	22.55	1.37
400	15.98	20.20	22.23	22.04	1.11	0.62	37.25	22.61	1.60
600	15.80	20.13	21.26	22.09	1.11	0.63	37.55	22.69	1.60
800	15.59	20.04	19.85	21.68	1.12	0.65	37.89	22.65	1.54
1000	15.34	19.95	18.51	21.32	1.13	0.66	37.76	22.53	1.59
1200	15.06	19.86	17.31	20.89	1.13	0.68	38.34	22.67	1.62
1400	14.76	19.74	16.20	20.63	1.14	0.70	38.66	22.66	1.63
1600	14.45	19.61	15.38	20.51	1.15	0.72	39.34	22.75	1.66
1800	14.14	19.49	14.75	20.13	1.15	0.73	38.31	22.54	1.76
2000	13.83	19.31	14.08	20.01	1.16	0.75	38.94	22.63	1.70
2200	13.51	19.20	13.77	19.96	1.16	0.77	38.44	22.43	1.74
2400	13.22	18.98	13.26	19.97	1.16	0.78	39.89	22.78	1.72
2600	12.93	18.85	13.13	19.77	1.17	0.80	40.44	22.85	1.79
2800	12.66	18.64	12.93	19.30	1.17	0.81	40.37	22.64	1.95
3000	12.41	18.44	12.72	18.69	1.16	0.81	40.31	22.70	1.91
3200	12.17	18.29	12.64	18.39	1.16	0.82	41.67	22.94	1.93
3400	11.89	18.14	12.44	18.52	1.17	0.83	41.25	22.79	2.01
3600	11.74	17.88	12.08	17.87	1.15	0.83	41.17	22.84	2.03
3800	11.50	17.77	12.02	17.80	1.16	0.84	42.82	22.88	2.11
4000	11.32	17.52	11.52	17.62	1.14	0.84	42.63	22.91	2.14
4200	11.15	17.36	11.11	17.40	1.13	0.85	42.19	22.92	2.19
4400	10.89	17.15	10.73	17.73	1.13	0.86	42.61	22.81	2.27
4600	10.78	16.93	10.21	17.06	1.11	0.87	42.96	22.99	2.27
4800	10.66	16.79	9.85	16.56	1.09	0.88	42.71	22.94	2.36
5000	10.55	16.69	9.56	16.39	1.08	0.89	44.21	23.15	2.41
5200	10.39	16.51	9.30	16.33	1.07	0.90	43.47	22.82	2.44
5400	10.30	16.36	9.22	16.01	1.06	0.90	45.37	23.04	2.49
5600	10.16	16.08	9.01	15.58	1.03	0.90	43.74	22.65	2.59
5800	10.11	15.78	8.95	15.64	1.02	0.89	44.28	22.49	2.59
6000	10.14	15.61	8.86	15.14	0.99	0.88	43.76	22.10	2.63
6200	10.16	15.28	8.82	14.99	0.97	0.86	43.65	22.19	2.65
6400	10.17	15.04	8.60	14.82	0.95	0.85	42.01	21.94	2.71
6600	10.20	14.74	8.34	14.83	0.92	0.84	41.75	21.67	2.78
6800	10.19	14.43	7.88	15.16	0.90	0.83	41.83	21.75	2.89
7000	10.06	14.24	7.32	14.89	0.88	0.84	42.05	21.67	3.03
7200	9.96	13.97	6.72	14.80	0.87	0.84	42.40	21.71	3.13
7400	9.63	13.74	6.17	13.94	0.86	0.85	42.64	21.52	3.25
7600	9.19	13.75	5.48	12.76	0.85	0.89	42.53	21.59	3.47
7800	8.83	14.00	4.63	11.46	0.83	0.94	42.18	21.16	3.65
8000	8.19	13.82	4.49	10.88	0.85	0.95	41.96	21.13	3.84



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 4 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 109.28 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.54	23.65	6.85	9.09	0.85	0.69	39.02	21.22	1.51
30	18.71	22.20	8.42	10.58	0.87	0.66	39.25	21.87	1.50
40	18.05	21.46	9.94	12.02	0.91	0.65	37.97	21.93	1.38
50	17.56	20.90	11.35	13.30	0.94	0.62	37.92	21.69	1.31
60	17.19	20.92	12.55	14.51	0.99	0.65	38.21	21.67	1.33
70	16.95	20.60	13.55	15.39	1.00	0.63	38.85	21.71	1.39
80	16.77	20.52	14.47	16.25	1.02	0.63	38.33	21.78	1.36
90	16.62	20.41	15.30	16.98	1.03	0.62	38.82	21.80	1.37
100	16.51	20.36	16.00	17.59	1.05	0.62	38.86	21.97	1.36
200	16.10	20.13	20.36	21.19	1.09	0.62	38.47	21.76	1.36
400	15.87	20.08	22.20	22.24	1.11	0.62	37.74	21.84	1.56
600	15.70	20.01	21.25	22.35	1.11	0.63	38.32	21.93	1.59
800	15.48	19.95	19.83	21.88	1.12	0.65	38.57	21.89	1.50
1000	15.24	19.85	18.49	21.50	1.13	0.66	38.85	21.78	1.54
1200	14.97	19.76	17.30	20.97	1.13	0.68	39.20	21.91	1.59
1400	14.67	19.65	16.20	20.66	1.14	0.70	39.61	21.89	1.59
1600	14.36	19.55	15.38	20.51	1.15	0.72	39.77	21.98	1.62
1800	14.05	19.40	14.72	20.05	1.15	0.73	38.77	21.79	1.71
2000	13.74	19.25	14.09	19.87	1.16	0.75	39.04	21.88	1.68
2200	13.43	19.11	13.75	19.78	1.16	0.77	38.50	21.72	1.69
2400	13.14	18.93	13.24	19.76	1.16	0.79	39.76	22.05	1.70
2600	12.85	18.78	13.10	19.51	1.17	0.80	40.32	22.09	1.74
2800	12.58	18.62	12.88	19.03	1.17	0.81	40.35	21.88	1.88
3000	12.33	18.39	12.68	18.44	1.16	0.82	40.11	21.94	1.83
3200	12.10	18.25	12.58	18.19	1.16	0.82	40.89	22.16	1.87
3400	11.82	18.10	12.46	18.28	1.17	0.83	40.22	22.08	1.94
3600	11.67	17.84	12.04	17.69	1.15	0.83	40.32	22.10	1.91
3800	11.44	17.77	11.97	17.64	1.16	0.84	40.93	22.11	2.01
4000	11.25	17.48	11.53	17.43	1.14	0.85	40.24	22.14	2.06
4200	11.08	17.31	11.06	17.23	1.13	0.86	40.14	22.17	2.09
4400	10.83	17.13	10.74	17.53	1.14	0.87	40.14	22.05	2.19
4600	10.71	16.93	10.21	16.91	1.11	0.87	39.92	22.21	2.21
4800	10.58	16.79	9.84	16.41	1.09	0.88	39.73	22.13	2.31
5000	10.49	16.67	9.54	16.27	1.08	0.89	40.48	22.40	2.30
5200	10.32	16.49	9.28	16.20	1.07	0.90	40.24	22.07	2.34
5400	10.25	16.36	9.21	15.91	1.06	0.90	40.58	22.27	2.41
5600	10.09	16.07	9.00	15.48	1.04	0.90	40.20	21.95	2.49
5800	10.06	15.78	8.95	15.58	1.02	0.89	40.24	21.81	2.50
6000	10.07	15.62	8.82	15.09	1.00	0.88	40.64	21.49	2.52
6200	10.09	15.28	8.79	14.96	0.97	0.86	40.12	21.54	2.56
6400	10.11	15.01	8.59	14.80	0.95	0.85	40.17	21.31	2.62
6600	10.14	14.75	8.33	14.83	0.93	0.84	39.67	21.05	2.64
6800	10.13	14.43	7.89	15.11	0.90	0.84	39.06	21.16	2.71
7000	10.00	14.24	7.31	14.83	0.88	0.85	39.28	21.05	2.88
7200	9.90	13.97	6.72	14.71	0.87	0.84	39.89	21.12	2.95
7400	9.56	13.76	6.17	13.84	0.86	0.85	39.15	20.92	3.08
7600	9.12	13.74	5.47	12.66	0.85	0.89	38.99	20.94	3.32
7800	8.78	14.02	4.66	11.36	0.83	0.94	38.67	20.61	3.46
8000	8.14	13.81	4.49	10.79	0.84	0.95	37.95	20.53	3.70



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 5 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 139.75 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.68	23.65	7.02	9.31	0.86	0.68	42.88	22.65	1.75
30	18.85	22.29	8.63	10.82	0.87	0.66	42.08	23.27	1.73
40	18.20	21.57	10.16	12.25	0.91	0.64	40.92	23.39	1.56
50	17.71	21.27	11.58	13.50	0.95	0.64	39.71	23.23	1.46
60	17.35	20.84	12.87	14.75	0.98	0.62	39.18	23.10	1.49
70	17.12	20.73	13.81	15.59	1.00	0.62	39.09	23.20	1.52
80	16.94	20.64	14.74	16.40	1.02	0.62	38.67	23.26	1.50
90	16.80	20.56	15.56	17.10	1.04	0.62	38.54	23.27	1.48
100	16.69	20.51	16.27	17.72	1.05	0.62	38.68	23.46	1.47
200	16.29	20.33	20.59	21.04	1.09	0.61	37.43	23.21	1.42
400	16.07	20.27	22.30	21.92	1.11	0.62	37.01	23.27	1.63
600	15.89	20.20	21.27	22.07	1.11	0.63	37.38	23.35	1.67
800	15.67	20.10	19.86	21.64	1.12	0.64	37.61	23.30	1.60
1000	15.43	20.02	18.50	21.32	1.13	0.66	37.51	23.17	1.63
1200	15.14	19.92	17.29	20.90	1.13	0.68	38.15	23.33	1.66
1400	14.84	19.80	16.19	20.67	1.14	0.70	38.36	23.29	1.69
1600	14.53	19.67	15.36	20.63	1.15	0.71	39.18	23.43	1.72
1800	14.21	19.53	14.71	20.27	1.15	0.73	38.25	23.19	1.78
2000	13.90	19.38	14.07	20.17	1.16	0.75	38.79	23.27	1.77
2200	13.58	19.24	13.75	20.15	1.16	0.77	38.35	23.09	1.80
2400	13.29	19.05	13.25	20.19	1.16	0.78	39.48	23.41	1.82
2600	12.99	18.88	13.12	19.95	1.17	0.80	40.48	23.47	1.87
2800	12.72	18.69	12.91	19.45	1.16	0.81	40.15	23.30	1.99
3000	12.48	18.47	12.71	18.84	1.16	0.81	40.51	23.31	1.97
3200	12.23	18.34	12.64	18.55	1.16	0.82	41.01	23.63	1.98
3400	11.95	18.15	12.44	18.66	1.17	0.83	41.28	23.50	2.04
3600	11.79	17.90	12.08	17.97	1.15	0.83	41.28	23.50	2.07
3800	11.56	17.84	12.01	17.92	1.16	0.84	42.41	23.56	2.18
4000	11.38	17.54	11.52	17.73	1.14	0.84	42.65	23.57	2.20
4200	11.20	17.36	11.12	17.47	1.13	0.85	42.85	23.62	2.32
4400	10.94	17.21	10.73	17.81	1.13	0.86	42.45	23.47	2.37
4600	10.83	16.97	10.20	17.22	1.11	0.87	43.18	23.65	2.38
4800	10.71	16.79	9.83	16.69	1.09	0.88	44.68	23.59	2.46
5000	10.61	16.71	9.56	16.44	1.08	0.89	46.07	23.81	2.53
5200	10.44	16.52	9.30	16.39	1.07	0.90	43.20	23.49	2.58
5400	10.36	16.42	9.22	15.95	1.06	0.90	45.20	23.69	2.63
5600	10.20	16.13	9.00	15.76	1.04	0.90	43.40	23.25	2.69
5800	10.16	15.89	8.96	15.59	1.02	0.89	42.99	23.09	2.70
6000	10.18	15.59	8.82	15.14	0.99	0.88	41.91	22.72	2.86
6200	10.19	15.30	8.79	14.91	0.97	0.86	41.65	22.79	2.75
6400	10.22	15.03	8.58	14.80	0.94	0.85	39.89	22.57	2.86
6600	10.27	14.75	8.35	14.86	0.92	0.83	40.00	22.22	2.89
6800	10.23	14.42	7.86	15.11	0.90	0.83	41.10	22.35	2.98
7000	10.11	14.24	7.28	14.90	0.88	0.84	40.27	22.22	3.12
7200	10.03	13.95	6.74	14.96	0.87	0.83	40.24	22.27	3.25
7400	9.64	13.79	6.12	13.77	0.86	0.85	40.45	22.12	3.38
7600	9.28	13.82	5.26	12.60	0.84	0.90	40.38	22.12	3.63
7800	8.89	14.06	4.66	11.61	0.84	0.94	41.35	21.72	3.77
8000	8.24	13.80	4.46	10.95	0.84	0.95	40.55	21.63	3.98



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 6 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 135.70 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.18	23.70	7.80	9.96	0.93	0.69	36.02	21.96	2.44
30	18.46	22.59	9.56	11.81	0.96	0.67	37.09	22.65	2.38
40	17.96	22.00	11.12	13.55	1.00	0.66	37.10	22.82	2.34
50	17.63	21.58	12.53	15.11	1.02	0.64	37.05	22.53	2.29
60	17.38	21.34	13.52	16.54	1.04	0.64	37.64	22.46	2.33
70	17.24	21.38	14.44	17.59	1.06	0.65	37.92	22.60	2.34
80	17.13	21.26	15.20	18.64	1.07	0.64	38.00	22.63	2.33
90	17.04	21.24	15.84	19.55	1.08	0.65	38.60	22.62	2.34
100	16.98	21.18	16.35	20.33	1.09	0.64	38.47	22.81	2.32
200	16.72	21.05	18.75	25.26	1.11	0.65	40.34	22.50	2.30
400	16.51	20.98	18.86	28.11	1.12	0.66	40.52	22.49	2.51
600	16.28	20.92	18.10	28.01	1.13	0.68	40.64	22.56	2.55
800	16.01	20.81	17.11	26.69	1.13	0.69	40.29	22.51	2.49
1000	15.69	20.69	16.06	25.06	1.14	0.72	40.27	22.36	2.57
1200	15.34	20.54	15.10	23.59	1.14	0.74	39.65	22.54	2.64
1400	14.96	20.38	14.25	22.11	1.15	0.76	39.43	22.53	2.64
1600	14.58	20.25	13.51	20.88	1.15	0.78	38.95	22.67	2.70
1800	14.19	20.05	12.88	19.67	1.15	0.80	38.44	22.49	2.81
2000	13.82	19.88	12.34	18.74	1.16	0.82	38.57	22.62	2.80
2200	13.44	19.69	11.93	17.90	1.16	0.84	38.73	22.43	2.89
2400	13.09	19.50	11.55	17.14	1.16	0.85	38.61	22.77	2.87
2600	12.74	19.34	11.34	16.55	1.16	0.87	38.47	22.78	3.00
2800	12.43	19.14	11.10	15.97	1.16	0.88	38.09	22.58	3.13
3000	12.14	18.93	10.87	15.44	1.16	0.89	38.27	22.66	3.13
3200	11.85	18.76	10.81	15.05	1.16	0.89	37.97	22.78	3.18
3400	11.56	18.53	10.63	14.84	1.16	0.90	37.61	22.56	3.25
3600	11.35	18.30	10.43	14.47	1.14	0.90	37.59	22.66	3.28
3800	11.10	18.15	10.36	14.38	1.15	0.91	37.64	22.64	3.38
4000	10.89	17.93	10.15	14.33	1.14	0.91	37.18	22.56	3.47
4200	10.66	17.74	9.93	14.41	1.14	0.92	37.34	22.53	3.53
4400	10.50	17.35	9.43	14.13	1.10	0.92	37.36	22.43	3.64
4600	10.37	17.20	9.18	14.02	1.09	0.93	37.15	22.52	3.68
4800	10.24	17.10	8.97	13.99	1.08	0.94	37.05	22.41	3.76
5000	10.11	16.97	8.69	14.00	1.07	0.95	37.37	22.56	3.89
5200	9.89	16.64	8.29	13.94	1.04	0.96	36.81	22.30	3.91
5400	9.77	16.49	8.17	14.04	1.04	0.97	37.14	22.38	3.97
5600	9.69	16.29	7.91	13.78	1.01	0.97	36.86	22.12	4.10
5800	9.55	15.99	7.62	13.28	0.98	0.98	36.65	21.98	4.18
6000	9.47	15.71	7.52	13.33	0.96	0.97	36.40	21.69	4.27
6200	9.43	15.47	7.34	13.12	0.93	0.97	36.39	21.74	4.30
6400	9.36	15.27	7.18	12.61	0.91	0.97	35.83	21.50	4.42
6600	9.36	14.92	7.12	12.80	0.89	0.96	35.48	21.27	4.49
6800	9.25	14.65	6.94	12.51	0.87	0.95	35.75	21.27	4.62
7000	9.09	14.41	6.68	12.63	0.86	0.96	35.34	21.26	4.76
7200	8.88	14.17	6.36	12.70	0.85	0.96	35.79	21.26	4.91
7400	8.60	14.13	5.93	12.46	0.85	0.98	35.12	21.12	5.03
7600	8.16	13.98	5.55	12.26	0.86	1.00	34.95	21.15	5.27
7800	7.69	13.96	5.04	11.78	0.87	1.03	35.12	20.84	5.51
8000	6.99	13.83	4.93	11.36	0.90	1.03	34.45	20.68	5.76



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 7 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 123.59 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.18	23.65	7.60	9.87	0.93	0.69	35.55	21.43	2.22
30	18.46	22.48	9.34	11.74	0.95	0.67	36.97	22.07	2.22
40	17.95	21.95	10.90	13.47	0.99	0.66	36.80	22.23	2.15
50	17.60	21.52	12.21	14.93	1.01	0.64	36.83	22.02	2.11
60	17.36	21.57	13.43	16.49	1.05	0.66	37.69	21.89	2.14
70	17.21	21.32	14.20	17.52	1.06	0.65	37.60	22.02	2.16
80	17.10	21.23	14.98	18.57	1.07	0.65	38.37	22.03	2.15
90	17.01	21.17	15.60	19.46	1.08	0.64	38.57	22.05	2.17
100	16.95	21.13	16.09	20.24	1.08	0.64	38.17	22.21	2.15
200	16.68	20.96	18.51	25.10	1.11	0.64	39.77	21.94	2.16
400	16.47	20.93	18.63	27.71	1.12	0.66	40.37	21.93	2.36
600	16.24	20.82	17.90	27.43	1.12	0.67	40.17	22.00	2.39
800	15.96	20.72	16.94	26.01	1.13	0.69	39.35	21.96	2.33
1000	15.64	20.60	15.94	24.37	1.13	0.71	39.16	21.81	2.41
1200	15.29	20.47	15.00	22.89	1.14	0.74	38.43	21.98	2.45
1400	14.91	20.29	14.16	21.48	1.14	0.76	38.30	21.97	2.48
1600	14.52	20.14	13.44	20.35	1.15	0.78	37.83	22.09	2.56
1800	14.13	19.96	12.82	19.19	1.15	0.80	37.30	21.94	2.62
2000	13.76	19.78	12.28	18.33	1.15	0.82	37.36	22.06	2.61
2200	13.38	19.60	11.89	17.56	1.15	0.84	37.05	21.85	2.71
2400	13.03	19.38	11.52	16.88	1.15	0.85	37.44	22.20	2.77
2600	12.68	19.22	11.31	16.34	1.15	0.86	37.44	22.21	2.77
2800	12.37	19.02	11.08	15.81	1.15	0.87	36.92	22.05	2.89
3000	12.08	18.79	10.88	15.32	1.15	0.88	37.11	22.10	2.91
3200	11.79	18.63	10.81	15.00	1.15	0.89	36.96	22.23	2.97
3400	11.50	18.40	10.65	14.83	1.15	0.89	36.69	22.08	3.09
3600	11.30	18.17	10.44	14.47	1.14	0.90	36.65	22.14	3.12
3800	11.04	18.01	10.38	14.42	1.14	0.90	36.72	22.09	3.21
4000	10.83	17.78	10.18	14.37	1.13	0.91	36.19	22.07	3.29
4200	10.61	17.58	9.97	14.46	1.13	0.91	36.40	22.01	3.34
4400	10.44	17.20	9.47	14.20	1.09	0.92	36.24	21.92	3.46
4600	10.31	17.08	9.22	14.10	1.08	0.93	36.27	21.98	3.48
4800	10.18	16.99	9.01	14.10	1.08	0.94	36.03	21.91	3.60
5000	10.05	16.86	8.75	14.15	1.07	0.95	36.50	22.01	3.68
5200	9.83	16.50	8.33	14.05	1.04	0.96	35.93	21.79	3.72
5400	9.71	16.37	8.22	14.16	1.04	0.96	36.42	21.88	3.81
5600	9.63	16.17	7.97	13.93	1.01	0.97	35.87	21.60	3.88
5800	9.49	15.86	7.67	13.45	0.98	0.97	35.74	21.50	3.97
6000	9.41	15.61	7.58	13.49	0.96	0.97	35.52	21.20	4.05
6200	9.37	15.36	7.43	13.28	0.94	0.96	35.31	21.29	4.13
6400	9.31	15.15	7.26	12.77	0.91	0.96	34.73	21.03	4.22
6600	9.30	14.82	7.20	12.95	0.90	0.95	34.39	20.80	4.28
6800	9.19	14.57	7.01	12.65	0.88	0.95	34.47	20.83	4.38
7000	9.03	14.34	6.76	12.75	0.87	0.95	34.25	20.78	4.56
7200	8.82	14.12	6.44	12.77	0.86	0.95	34.77	20.81	4.70
7400	8.54	14.05	5.99	12.40	0.86	0.97	34.01	20.68	4.77
7600	8.10	13.89	5.61	12.14	0.87	0.99	33.88	20.69	5.04
7800	7.63	13.93	5.11	11.61	0.88	1.01	33.91	20.30	5.28
8000	6.93	13.79	4.98	11.15	0.91	1.02	33.40	20.16	5.52



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 8 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 146.96 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.14	23.66	8.02	10.02	0.94	0.68	35.50	22.47	2.74
30	18.43	22.62	9.79	11.87	0.97	0.67	36.75	23.11	2.68
40	17.94	21.96	11.38	13.61	1.00	0.65	36.89	23.29	2.58
50	17.61	21.81	12.71	15.17	1.03	0.66	36.63	23.17	2.52
60	17.37	21.37	13.89	16.63	1.05	0.64	37.25	22.93	2.54
70	17.23	21.39	14.68	17.66	1.06	0.65	37.49	23.08	2.56
80	17.12	21.30	15.47	18.73	1.07	0.64	37.78	23.08	2.57
90	17.04	21.25	16.09	19.63	1.08	0.64	38.23	23.07	2.56
100	16.98	21.19	16.59	20.45	1.09	0.64	38.25	23.30	2.54
200	16.73	21.11	19.01	25.35	1.11	0.65	39.80	22.96	2.49
400	16.52	21.03	19.08	28.27	1.12	0.66	39.59	22.96	2.72
600	16.29	20.92	18.24	28.42	1.13	0.67	39.81	23.01	2.76
800	16.02	20.85	17.21	27.11	1.13	0.70	39.93	22.94	2.72
1000	15.70	20.73	16.15	25.56	1.14	0.72	40.17	22.84	2.78
1200	15.35	20.60	15.15	24.03	1.15	0.74	39.56	23.01	2.84
1400	14.98	20.49	14.30	22.52	1.15	0.77	39.55	23.00	2.85
1600	14.59	20.29	13.55	21.24	1.16	0.78	39.28	23.15	2.91
1800	14.21	20.14	12.90	19.98	1.16	0.81	38.87	22.99	3.01
2000	13.84	19.92	12.37	18.97	1.16	0.82	38.67	23.13	3.03
2200	13.46	19.81	11.95	18.11	1.17	0.84	39.36	22.90	3.08
2400	13.12	19.59	11.54	17.28	1.16	0.86	39.01	23.27	3.09
2600	12.76	19.41	11.32	16.63	1.17	0.87	38.83	23.27	3.19
2800	12.45	19.25	11.08	16.01	1.17	0.88	38.40	23.08	3.33
3000	12.16	19.03	10.86	15.44	1.16	0.89	38.81	23.12	3.30
3200	11.87	18.88	10.79	15.02	1.17	0.90	38.42	23.22	3.39
3400	11.58	18.61	10.61	14.80	1.16	0.90	38.05	23.07	3.45
3600	11.38	18.43	10.40	14.38	1.15	0.91	38.06	23.11	3.52
3800	11.12	18.26	10.32	14.29	1.15	0.91	37.89	23.07	3.62
4000	10.91	18.04	10.11	14.20	1.15	0.92	37.60	23.03	3.66
4200	10.69	17.85	9.89	14.26	1.14	0.92	37.95	22.95	3.78
4400	10.51	17.46	9.39	14.01	1.10	0.93	37.46	22.83	3.86
4600	10.39	17.30	9.13	13.87	1.09	0.94	37.56	22.90	3.88
4800	10.26	17.18	8.90	13.82	1.08	0.94	37.41	22.77	4.01
5000	10.13	17.09	8.63	13.81	1.07	0.96	37.41	22.92	4.10
5200	9.91	16.73	8.23	13.77	1.04	0.97	37.24	22.74	4.14
5400	9.79	16.58	8.10	13.85	1.03	0.97	37.35	22.76	4.24
5600	9.71	16.36	7.83	13.59	1.01	0.98	37.16	22.49	4.31
5800	9.57	16.07	7.54	13.13	0.97	0.98	37.19	22.39	4.43
6000	9.49	15.78	7.44	13.18	0.96	0.98	36.99	22.10	4.49
6200	9.45	15.53	7.28	12.95	0.93	0.98	36.94	22.15	4.58
6400	9.38	15.31	7.11	12.44	0.90	0.98	36.43	21.92	4.67
6600	9.38	14.98	7.04	12.62	0.88	0.96	36.32	21.67	4.77
6800	9.26	14.71	6.85	12.31	0.86	0.96	36.42	21.67	4.86
7000	9.10	14.46	6.60	12.50	0.85	0.97	36.18	21.62	5.05
7200	8.90	14.22	6.28	12.61	0.85	0.97	36.38	21.59	5.22
7400	8.61	14.15	5.85	12.43	0.84	0.99	35.94	21.48	5.31
7600	8.17	14.01	5.48	12.28	0.85	1.01	35.78	21.51	5.56
7800	7.70	13.99	4.99	11.87	0.86	1.04	36.00	21.16	5.80
8000	6.99	13.87	4.89	11.47	0.90	1.04	35.35	20.85	6.08



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 9 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5V, Id = 133.86 mA @ Temperature = +105degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.04	23.73	8.02	10.00	0.95	0.69	35.14	21.96	2.77
30	18.34	22.57	9.78	11.88	0.98	0.67	36.23	22.54	2.71
40	17.87	22.00	11.32	13.64	1.01	0.66	36.44	22.76	2.62
50	17.55	21.82	12.60	15.13	1.04	0.67	36.34	22.53	2.59
60	17.33	21.53	13.80	16.66	1.06	0.65	37.05	22.36	2.59
70	17.19	21.42	14.53	17.65	1.07	0.65	36.75	22.52	2.59
80	17.09	21.38	15.24	18.66	1.08	0.65	36.98	22.55	2.58
90	17.02	21.30	15.83	19.57	1.09	0.65	37.52	22.56	2.63
100	16.96	21.25	16.31	20.33	1.09	0.65	37.33	22.75	2.58
200	16.72	21.12	18.47	24.78	1.11	0.65	38.61	22.42	2.57
400	16.50	21.05	18.36	26.97	1.12	0.66	38.49	22.40	2.76
600	16.27	21.00	17.61	26.95	1.13	0.68	38.58	22.46	2.83
800	15.99	20.88	16.68	25.75	1.14	0.70	38.57	22.42	2.78
1000	15.66	20.76	15.75	24.31	1.14	0.72	38.63	22.28	2.80
1200	15.31	20.62	14.83	22.85	1.15	0.75	38.13	22.45	2.89
1400	14.93	20.46	14.02	21.51	1.15	0.77	38.18	22.46	2.91
1600	14.53	20.29	13.30	20.29	1.15	0.79	37.67	22.59	2.99
1800	14.14	20.13	12.67	19.17	1.16	0.81	37.18	22.45	3.07
2000	13.76	19.92	12.13	18.21	1.16	0.83	37.41	22.54	3.06
2200	13.37	19.76	11.74	17.40	1.16	0.85	37.33	22.36	3.14
2400	13.02	19.54	11.32	16.65	1.16	0.87	37.54	22.65	3.20
2600	12.66	19.41	11.11	16.10	1.17	0.88	37.44	22.65	3.23
2800	12.34	19.19	10.86	15.49	1.16	0.89	37.06	22.48	3.38
3000	12.04	18.98	10.66	14.96	1.16	0.90	37.20	22.54	3.40
3200	11.75	18.82	10.55	14.55	1.16	0.90	36.92	22.59	3.37
3400	11.45	18.62	10.41	14.39	1.16	0.91	36.68	22.44	3.55
3600	11.24	18.39	10.19	13.99	1.15	0.91	36.56	22.49	3.55
3800	10.99	18.21	10.14	13.90	1.15	0.92	36.71	22.42	3.66
4000	10.78	18.01	9.95	13.80	1.14	0.92	36.13	22.36	3.76
4200	10.55	17.80	9.81	13.92	1.14	0.93	36.49	22.29	3.84
4400	10.37	17.39	9.36	13.79	1.10	0.93	36.23	22.16	3.92
4600	10.25	17.26	9.10	13.65	1.09	0.94	36.23	22.28	3.94
4800	10.13	17.12	8.88	13.66	1.08	0.95	36.15	22.12	4.08
5000	10.00	16.98	8.58	13.71	1.07	0.96	36.30	22.30	4.15
5200	9.78	16.66	8.15	13.69	1.04	0.97	35.88	22.08	4.18
5400	9.67	16.54	7.99	13.76	1.03	0.98	36.23	22.09	4.32
5600	9.55	16.31	7.71	13.62	1.01	0.99	35.91	21.85	4.41
5800	9.40	16.02	7.38	13.16	0.97	0.99	35.82	21.77	4.50
6000	9.34	15.81	7.27	13.21	0.96	0.99	35.55	21.41	4.60
6200	9.25	15.53	7.06	12.99	0.93	1.00	35.61	21.57	4.65
6400	9.16	15.32	6.89	12.49	0.90	1.00	34.94	21.26	4.76
6600	9.16	14.97	6.86	12.59	0.89	0.98	34.81	21.04	4.81
6800	9.04	14.72	6.72	12.34	0.87	0.98	34.82	21.03	5.00
7000	8.87	14.48	6.52	12.49	0.86	0.98	34.58	21.03	5.10
7200	8.68	14.23	6.27	12.63	0.86	0.99	34.91	20.98	5.25
7400	8.42	14.18	5.90	12.46	0.86	1.00	34.29	20.80	5.31
7600	7.98	14.02	5.54	12.39	0.87	1.02	34.13	20.85	5.56
7800	7.51	14.03	5.10	11.97	0.88	1.04	34.39	20.53	5.81
8000	6.80	13.82	4.92	11.41	0.91	1.05	33.71	20.30	6.12



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021

Page 10 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Id = 122.85 mA @ Temperature = +105degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	19.06	23.76	7.78	9.98	0.94	0.70	35.17	21.37	2.49
30	18.36	22.56	9.52	11.84	0.97	0.67	36.16	22.03	2.48
40	17.87	22.01	11.05	13.59	1.00	0.67	36.39	22.19	2.37
50	17.55	21.62	12.39	15.16	1.03	0.65	36.25	21.96	2.33
60	17.32	21.51	13.41	16.51	1.05	0.65	36.78	21.88	2.37
70	17.18	21.38	14.24	17.59	1.07	0.65	36.74	21.99	2.39
80	17.08	21.30	14.95	18.60	1.08	0.65	37.13	21.99	2.37
90	17.00	21.27	15.54	19.49	1.08	0.65	37.51	22.00	2.44
100	16.94	21.23	16.01	20.27	1.09	0.65	37.32	22.22	2.37
200	16.70	21.07	18.20	24.78	1.11	0.65	38.56	21.89	2.35
400	16.48	21.02	18.13	26.91	1.12	0.66	38.78	21.85	2.57
600	16.25	20.91	17.37	26.65	1.13	0.68	38.53	21.92	2.62
800	15.96	20.81	16.50	25.32	1.13	0.70	38.12	21.90	2.58
1000	15.63	20.69	15.60	23.80	1.14	0.72	38.05	21.76	2.63
1200	15.27	20.51	14.72	22.35	1.14	0.74	37.46	21.94	2.71
1400	14.89	20.38	13.92	21.01	1.14	0.77	37.33	21.91	2.71
1600	14.49	20.18	13.23	19.83	1.14	0.79	37.00	22.06	2.80
1800	14.10	20.03	12.62	18.78	1.15	0.81	36.44	21.89	2.89
2000	13.72	19.82	12.07	17.88	1.15	0.83	36.62	22.02	2.87
2200	13.33	19.67	11.69	17.14	1.15	0.85	36.40	21.83	2.95
2400	12.97	19.45	11.30	16.44	1.15	0.86	36.78	22.13	2.99
2600	12.61	19.26	11.10	15.92	1.15	0.87	36.72	22.13	3.02
2800	12.29	19.09	10.85	15.37	1.15	0.89	36.27	21.96	3.22
3000	11.99	18.85	10.64	14.90	1.15	0.89	36.35	22.00	3.20
3200	11.70	18.69	10.55	14.52	1.15	0.90	36.29	22.08	3.22
3400	11.41	18.46	10.43	14.37	1.15	0.91	35.96	21.95	3.33
3600	11.20	18.23	10.21	14.02	1.14	0.91	35.86	21.99	3.39
3800	10.95	18.07	10.17	13.95	1.14	0.91	36.03	21.94	3.47
4000	10.74	17.84	10.00	13.90	1.13	0.92	35.56	21.90	3.54
4200	10.51	17.63	9.86	14.04	1.13	0.92	35.81	21.86	3.60
4400	10.32	17.25	9.39	13.87	1.10	0.93	35.59	21.74	3.74
4600	10.21	17.10	9.15	13.77	1.08	0.93	35.64	21.82	3.74
4800	10.08	17.00	8.93	13.81	1.08	0.94	35.52	21.69	3.82
5000	9.95	16.86	8.63	13.88	1.07	0.95	35.86	21.87	3.93
5200	9.73	16.53	8.20	13.82	1.04	0.97	35.25	21.62	3.96
5400	9.62	16.43	8.05	13.92	1.04	0.97	35.65	21.64	4.09
5600	9.50	16.20	7.77	13.77	1.01	0.98	35.21	21.41	4.14
5800	9.35	15.92	7.45	13.30	0.98	0.99	35.03	21.34	4.26
6000	9.29	15.71	7.34	13.38	0.96	0.99	34.85	21.05	4.41
6200	9.20	15.42	7.13	13.13	0.94	0.99	34.79	21.11	4.41
6400	9.12	15.22	6.97	12.65	0.91	0.99	34.05	20.86	4.52
6600	9.12	14.90	6.95	12.77	0.89	0.97	33.86	20.63	4.58
6800	9.00	14.63	6.80	12.51	0.88	0.97	33.89	20.65	4.71
7000	8.83	14.41	6.61	12.60	0.87	0.97	33.70	20.59	4.83
7200	8.64	14.16	6.35	12.71	0.87	0.98	34.16	20.57	5.02
7400	8.37	14.13	5.97	12.45	0.87	0.99	33.47	20.38	5.03
7600	7.93	13.95	5.63	12.28	0.88	1.00	33.35	20.43	5.29
7800	7.46	14.01	5.16	11.82	0.89	1.03	33.49	20.11	5.52
8000	6.76	13.77	4.96	11.25	0.92	1.03	32.91	19.87	5.83



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
[The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com](http://www.minicircuits.com)



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-1H-6+
9/13/2021
Page 11 of 12

MMIC Amplifier

Typical Performance Data

PHA-1H-6+

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Id = 143.97 mA @ Temperature = +105degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (dBm)	Noise Figure (dB)
					K	Measure			
20	18.98	23.74	8.28	10.07	0.97	0.69	34.90	22.32	3.07
30	18.30	22.55	10.05	11.94	0.98	0.67	35.87	23.02	2.99
40	17.83	22.03	11.62	13.72	1.02	0.66	36.28	23.22	2.85
50	17.52	21.82	12.92	15.26	1.05	0.66	36.15	22.97	2.80
60	17.30	21.42	14.02	16.66	1.06	0.64	36.42	22.84	2.84
70	17.17	21.46	14.83	17.67	1.08	0.65	36.77	22.99	2.82
80	17.07	21.39	15.55	18.70	1.09	0.65	36.66	23.02	2.83
90	17.00	21.33	16.15	19.58	1.09	0.65	37.36	23.00	2.85
100	16.94	21.32	16.62	20.34	1.10	0.65	37.17	23.22	2.82
200	16.71	21.16	18.82	24.77	1.12	0.65	38.42	22.89	2.77
400	16.49	21.13	18.64	26.78	1.13	0.67	38.19	22.86	2.99
600	16.26	21.02	17.76	26.98	1.13	0.68	38.32	22.89	3.04
800	15.98	20.92	16.84	25.88	1.14	0.70	38.28	22.86	2.99
1000	15.66	20.81	15.85	24.55	1.15	0.73	38.62	22.72	3.04
1200	15.30	20.65	14.91	23.17	1.15	0.75	38.10	22.93	3.10
1400	14.93	20.54	14.09	21.78	1.16	0.77	38.21	22.91	3.14
1600	14.54	20.37	13.35	20.54	1.16	0.80	37.79	23.04	3.24
1800	14.14	20.18	12.72	19.37	1.16	0.82	37.36	22.90	3.33
2000	13.77	20.03	12.16	18.39	1.17	0.84	37.51	23.01	3.31
2200	13.38	19.88	11.77	17.55	1.17	0.86	37.79	22.80	3.36
2400	13.03	19.65	11.33	16.75	1.17	0.87	37.62	23.12	3.39
2600	12.67	19.48	11.12	16.14	1.17	0.88	37.78	23.10	3.43
2800	12.35	19.30	10.86	15.51	1.17	0.89	37.38	22.91	3.61
3000	12.05	19.08	10.64	14.95	1.16	0.90	37.38	22.96	3.61
3200	11.76	18.90	10.53	14.50	1.16	0.91	37.17	23.03	3.69
3400	11.46	18.71	10.39	14.31	1.17	0.91	37.04	22.83	3.75
3600	11.25	18.46	10.17	13.91	1.15	0.92	36.97	22.90	3.79
3800	11.00	18.31	10.10	13.77	1.15	0.92	36.94	22.82	3.89
4000	10.79	18.10	9.92	13.68	1.15	0.93	36.64	22.77	3.97
4200	10.56	17.90	9.77	13.79	1.15	0.93	36.75	22.70	4.05
4400	10.37	17.49	9.31	13.64	1.11	0.94	36.54	22.57	4.15
4600	10.26	17.34	9.05	13.51	1.09	0.94	36.46	22.66	4.18
4800	10.13	17.25	8.83	13.49	1.09	0.95	36.36	22.49	4.24
5000	10.00	17.07	8.52	13.54	1.07	0.96	36.40	22.66	4.39
5200	9.79	16.75	8.10	13.51	1.04	0.98	36.17	22.44	4.45
5400	9.68	16.65	7.92	13.59	1.03	0.98	36.35	22.42	4.56
5600	9.56	16.41	7.64	13.41	1.01	0.99	36.25	22.18	4.63
5800	9.40	16.11	7.31	13.00	0.97	1.00	36.18	22.10	4.72
6000	9.35	15.89	7.21	13.03	0.96	1.00	35.89	21.79	4.86
6200	9.25	15.58	6.99	12.81	0.93	1.00	35.99	21.91	4.90
6400	9.16	15.39	6.82	12.30	0.90	1.00	35.32	21.60	4.99
6600	9.17	15.04	6.79	12.41	0.88	0.99	35.34	21.39	5.07
6800	9.04	14.78	6.65	12.18	0.86	0.99	35.37	21.37	5.19
7000	8.87	14.53	6.45	12.33	0.85	0.99	35.19	21.33	5.36
7200	8.69	14.26	6.20	12.50	0.85	1.00	35.45	21.33	5.53
7400	8.42	14.20	5.82	12.41	0.85	1.01	34.86	21.18	5.64
7600	7.97	14.05	5.50	12.39	0.86	1.03	34.68	21.25	5.83
7800	7.50	14.07	5.05	12.04	0.88	1.05	35.01	20.86	6.09
8000	6.80	13.85	4.86	11.53	0.90	1.06	34.27	20.50	6.40

 **Mini-Circuits®**

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS




Case Style


DF

DF782

Outline Dimensions

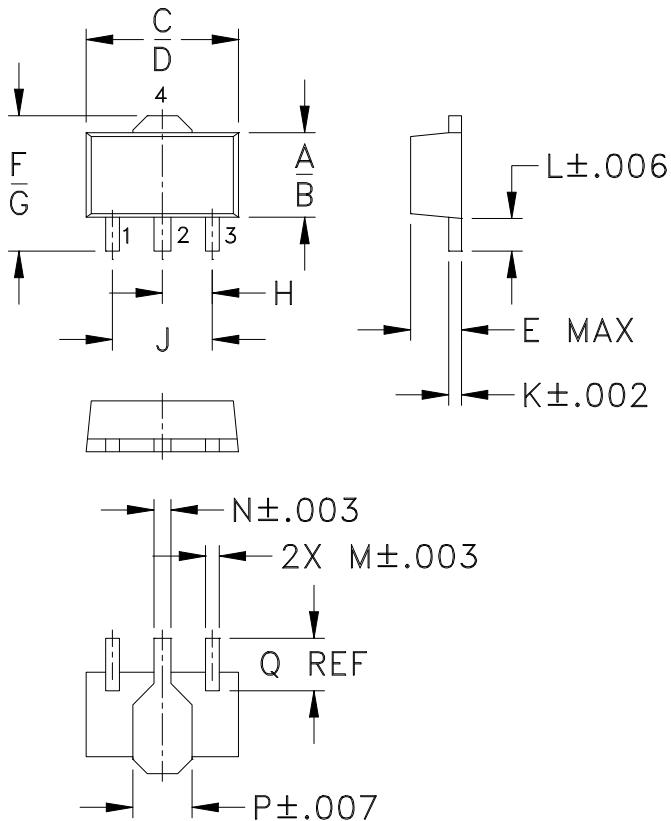

PCB Land Pattern

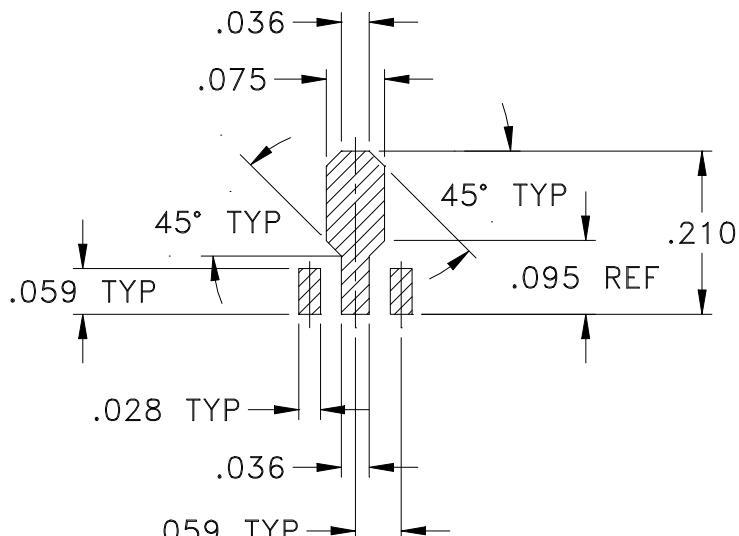

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
DF782	.102 (2.59)	.090 (2.29)	.181 (4.60)	.173 (4.39)	.063 (1.60)	.167 (4.24)	.155 (3.94)	.059 (1.50)	.118 (3.00)	.015 (0.38)	.041 (1.04)	.016 (0.41)

CASE #	N	P	Q	WT. GRAM
DF782	.019 (0.48)	.065 (1.65)	.062 (1.57)	.2

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$

Notes:

1. Case material: Plastic.
2. Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin.
All models, (+) suffix. See model Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F55

DEVICE ORIENTATION IN T&R

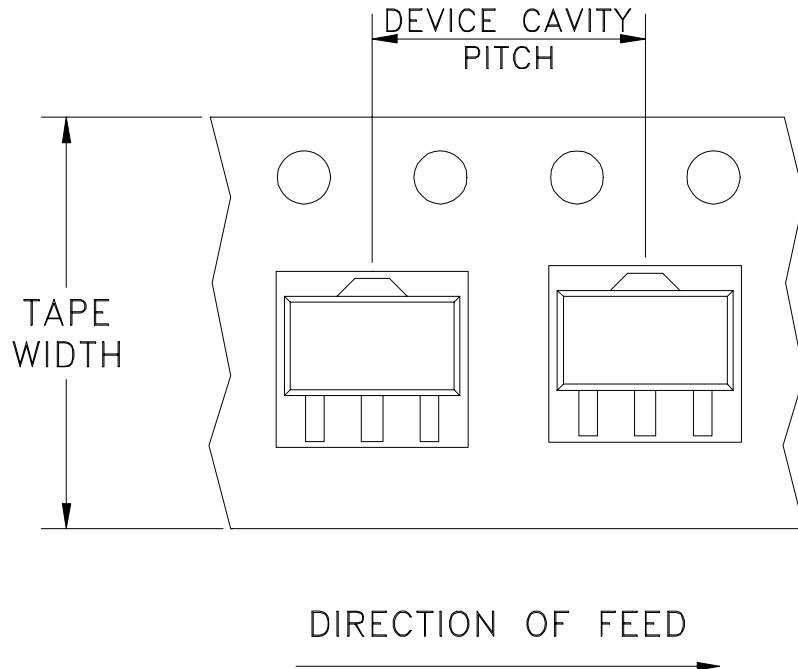

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
12	8	7	Small quantity standard (see note)	20
			50	50
			100	100
			200	200
			500	500
			Standard	1000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVIEWS

REV OR	ECN No.	DESCRIPTION	DATE	DR	AUTH
	M123948	NEW RELEASE	08/18/09	MMG	DJ

SUGGESTED MOUNTING CONFIGURATION
FOR DF782 CASE STYLE, "04AM03" PIN CODE

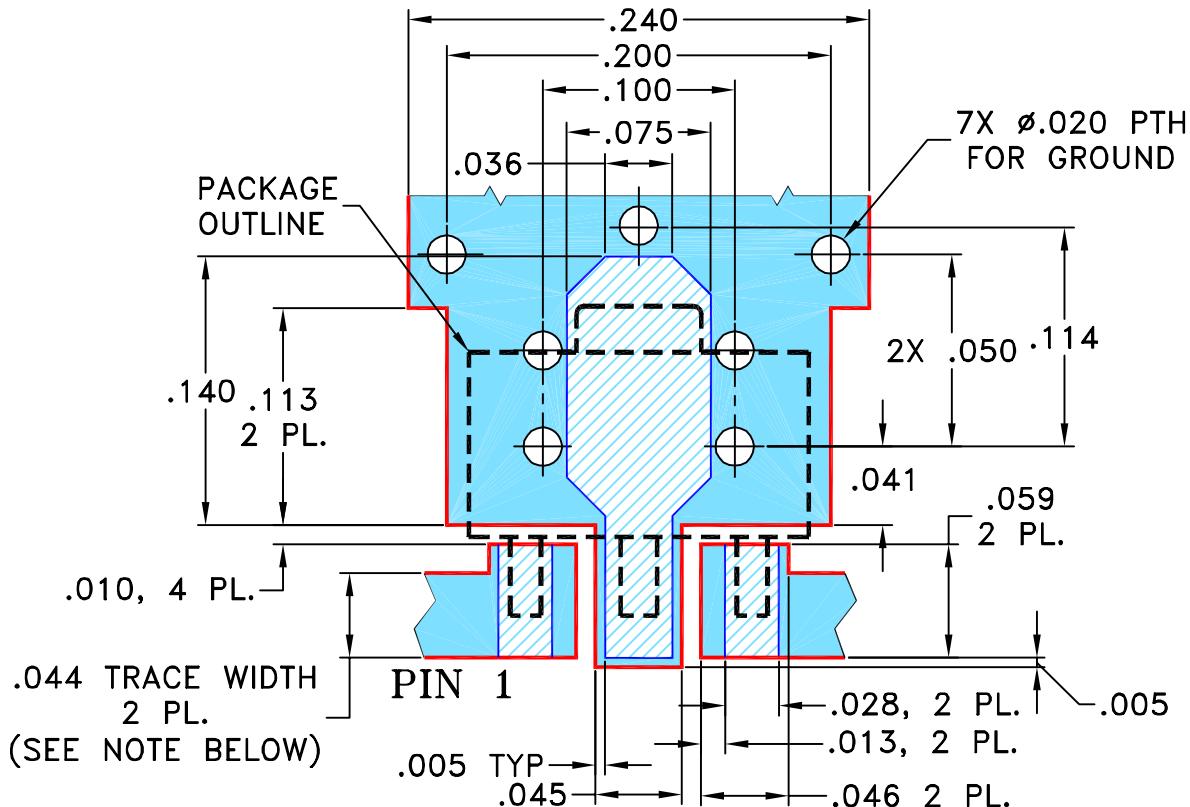

- NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.020" \pm .0015"$; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN

CHECKED

APPROVED

MMG

AV

DJ

08/17/09

08/17/09

08/18/09

TOLERANCES ON:

2 PL DECIMALS $\pm .005$ 3 PL DECIMALS $\pm .005$ ANGLES $\pm .005$ FRACTIONS $\pm .005$ 

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95




Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235


PL, 04AM03, DF782, TB-545-1+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-313	OR
FILE: 98PL313	SCALE: 10:1	SHEET: 1	OF 1

Evaluation Board and Circuit

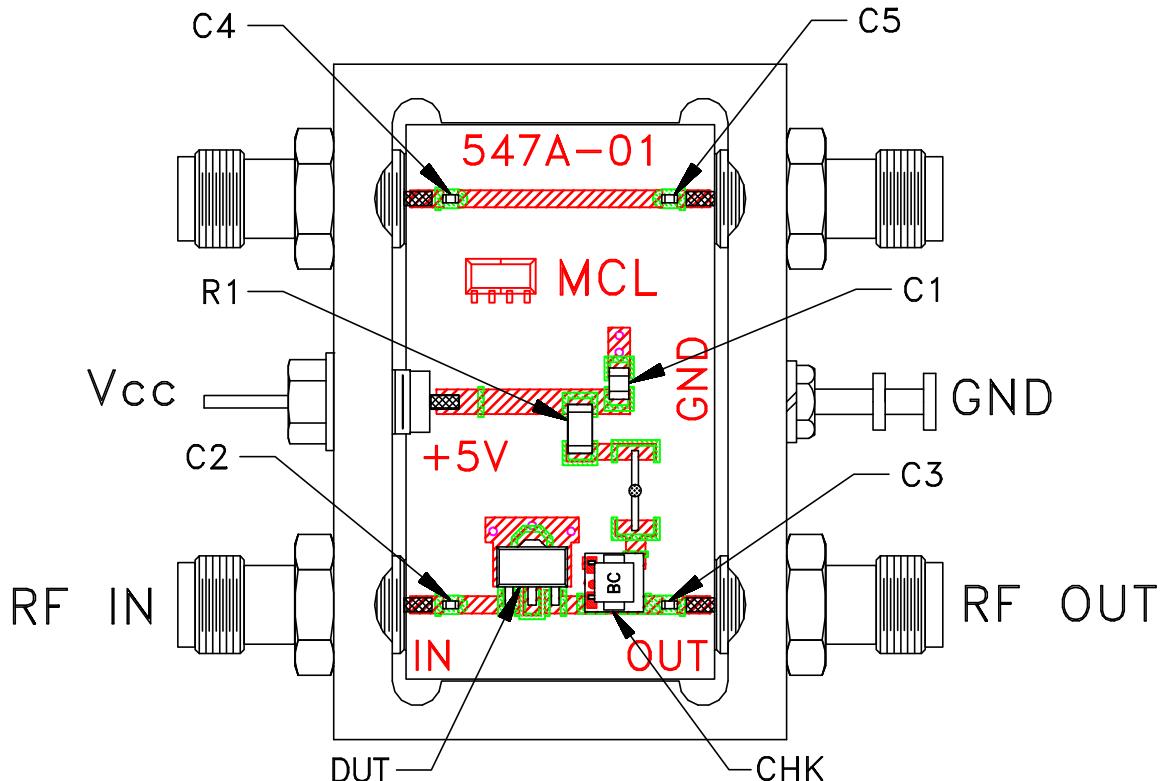

TB-545-1H+

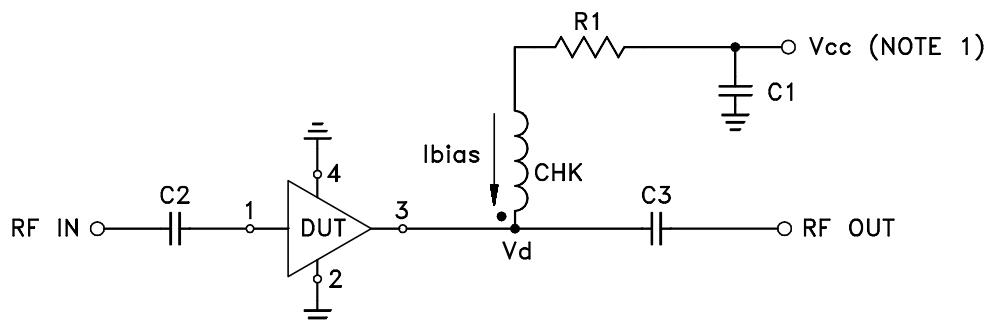

COMPONENT	VALUE
DUT	PHA-1H+
C1 (bypass)	0.1 μ F
C2-C5 (Note 4)	0.001 μ F
R1	0 Ohm, 0.25W
CHK	Mini-Circuits TCCH-80+

Schematic Diagram

NOTES:

1. Vcc voltage: $+5 \pm 0.2V$.
2. SMA Female connectors.
3. PCB material: Rogers R04350 or equivalent, dielectric constant=3.5, dielectric thickness=.020 inch.
4. Capacitor C2-C5 should be free of resonance up to the highest frequency specified.

Mini-Circuits®

**Environmental Specifications****ENV08T8**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 105° C Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020C, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours. Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether +	MIL-STD-202, Method 215