

Ultra High Dynamic Range


Monolithic Amplifier Die

PHA-83W-D+

50Ω 50 MHz to 8 GHz

The Big Deal

- Ultra Wideband, 0.05 - 8 GHz
- Excellent Gain Flatness 15.7±1.4 dB Typ.
- High Linearity, +23.3 dBm P1dB & +35.5 dBm OIP3
- Robust ESD performance (Class 1B)



Product Overview

PHA-83W-D+ (RoHS compliant) is an advanced wideband amplifier die fabricated using PHEMT technology and offers extremely high dynamic range over a broad frequency range and with excellent gain flatness. In addition, the PHA-83W-D+ has good input and output return loss over a broad frequency range.

Key Features

Feature	Advantages
Ultra Wideband: 50 MHz to 8 GHz	Broadband covering primary wireless communications bands
Extremely High IP3: 36.6 dBm typ. at 50 MHz 37 dBm typ. at 6 GHz	The PHA-83W-D+ matches industry leading IP3 performance relative to device size and power consumption. The combination of the design and PHEMT Structure provides enhanced linearity over a broad frequency range as evidence in the IP3 being approximately 12 dB above the P1dB point. This feature makes this amplifier ideal for use in: •Driver amplifiers for complex waveform up converter paths •Drivers in linearized transmit systems •Secondary amplifiers in ultra-High Dynamic range receivers
Excellent Gain Flatness	Typical ±1.4dB gain flatness across the entire frequency range minimizes the need for external equalizer networks making it a great fit for instrumentation and EW application.
Unpackaged Die	Enables the user to integrate the amplifier directly into hybrids



Ultra High Dynamic Range

Monolithic Amplifier Die

PHA-83W-D+

50Ω 50 MHz to 8 GHz

Product Features


- Ultra Wideband, 0.05 - 8GHz
- Excellent Gain Flatness 15.7±1.4dB Typ.
- High Linearity, +23.3 dBm P1dB & +35.5 dBm OIP3
- Robust ESD performance (Class 1B)

Typical Applications

- WiFi
- WLAN
- LTE
- WiMAX
- S-band Radar
- C-Band Satcom

General Description

PHA-83W-D+ (RoHS compliant) is an advanced wideband amplifier fabricated using PHEMT technology and offers extremely high dynamic range over a broad frequency range and with excellent gain flatness. In addition, the PHA-83W-D+ has good input and output return loss over a broad frequency range.




+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Ordering Information: Refer to Last Page

Simplified Schematic and Pad description

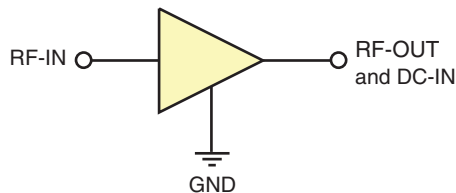

Pad#	Description
1	RF-IN
2	RF-OUT & DC-IN
3,4,5,6	GND

Bonding Pad Position

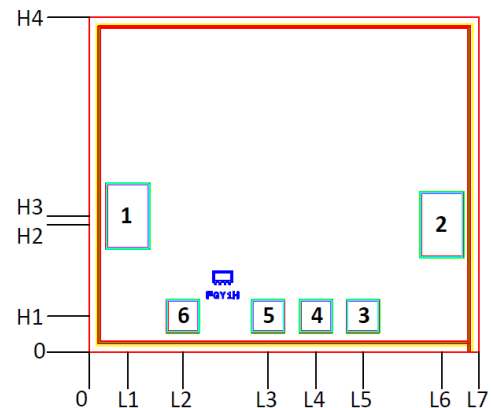

Dimensions in μm , Typical

L1	L2	L3	L4	L5	L6	L7	H1	H2	H3	H4
88	214	410	518	626	807	892	82	209	312	767

Thickness	Die size	Pad Size 1 & 2	Pad size 3,4,5&6
100	892 x 767	94 x 144	69 x 69



Electrical Specifications at 25°C, 50Ω, unless noted

Parameter	Condition (MHz)	V _{DD} =9V ¹			V _{DD} =5V ¹	V _{DD} =9V ²	V _{DD} =5V ²	Units
		Min.	Typ.	Max.	Typ.	Typ.	Typ.	
Frequency range		50		8000	50-8000	50-8000	50-8000	MHz
Gain	50		16.7		15.1	16.3	14.9	dB
	2000		16.3		14.4	16	14.2	
	4000		15.7		13.2	15.3	12.8	
	6000		16		12.6	15.5	12.4	
	8000		14.2		10	12.4	8.2	
Gain flatness	50 - 8000		1.4		2.8	—	—	dB
Input return loss	50		23		20	16	16	dB
	2000		21		14	21	17	
	4000		13		11	14	12	
	6000		13		14	14	16	
	8000		4		6	3	5	
Output return loss	50		17		26	13	17	dB
	2000		30		17	33	22	
	4000		18		13	17	12	
	6000		18		12	15	20	
	8000		5		6	6	6	
Output power @ 1 dB compression	50		23.8		16.5	23.7	15.6	dBm
	2000		23.8		16.3	24.3	16	
	4000		23.3		15.9	22.6	14.1	
	6000		22.6		16.4	22.6	15.8	
	8000		18.5		13.2	16.7	11	
Output IP3 (P _{out} = 0dBm/Tone)	50		36.6		24.1	36.5	25.9	dBm
	2000		36		23.4	35.4	24.6	
	4000		35.5		23.4	34.5	22.8	
	6000		37		23.6	35.6	25.1	
	8000		31.9		20.9	29.9	19.5	
Noise figure	50		3.3		2.8	3.4	2.8	dB
	2000		2.9		2.7	2.9	2.7	
	4000		3.3		3.1	3.5	3.1	
	6000		3.9		3.6	3.9	3.5	
	8000		5.1		4.7	5.4	4.9	
Device operating voltage		8.5	9	9.5	5	9	5	V
Device operating current			110	127	40.8	115	42.7	mA
Device current variation vs. temperature ³			34.6		30.8	34.6	30.8	μA/°C
Device current variation vs voltage ⁴			0.018		0.015	0.018	0.015	mA/mV
Thermal resistance, junction-to-ground Lead at 85°C stage temperature			41		41	41	41	°C/W

1. Die is packaged in SOT-89 and soldered on TB-PHA-83W+. See Characterization Test Circuit (Figure 1).

2. Die is packaged in SOT-89 and soldered on TB-PHA-83WE+. See Application Test Circuit (Figure 2).

3. Device Current Variation vs. Temperature= (Current at 85°C - Current at -45°C)/130

4. Device Current Variation vs. Voltage = (Current at 9.5V - Current at 8.5V) / ((9.5V-8.5V)*1000 mV/V)

Absolute Maximum Ratings⁵

Parameter	Ratings
Operating temperature (ground lead)	-40°C to 85°C
Power dissipation	1.58W
Input power (CW)	18 dBm (continuous) 24 dBm (5 minutes max)
DC Voltage or V _{DD}	10.5V

Characterization Test Circuit


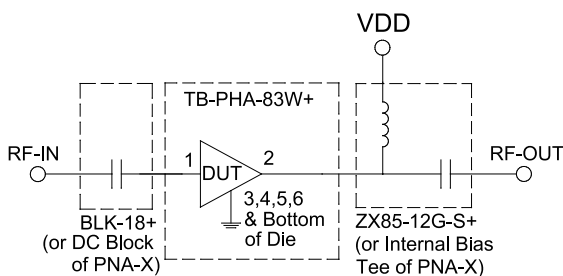


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT is packaged in SOT-89 and soldered on Mini-Circuits Characterization test board TB-PHA-83W+) Gain, Return loss, Output power at 1dB compression (P1 dB) , output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: Pin= -25dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.

Application Test Circuit

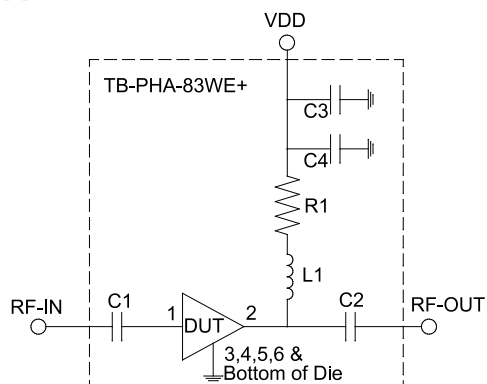

Component	Size	Value	Part Number	Manufacturer
C1	0402	1000pF	GRM1555C1H102JA01D	Murata
C2	0402	180pF	GRM1555C1H181JA01D	Murata
C3	0402	0.1 μ F	GRM155R71C104KA88D	Murata
C4	0402	10000pF	GRM155R71E103KA01D	Murata
L1	0603	330nH	LQW18CNF33J00D	Murata
R1	0402	20hm	RK73H1ETTP2R00F	Koa


Fig 2. Block Diagram of Test Circuit used for characterization. (DUT is packaged in SOT-89 & soldered on Mini-Circuits Application test board TB-PHA-83WE+)

Gain, Return loss, Output power at 1dB compression (P1dB), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: Pin= -25dBm
2. Output IP3 (OIP3): Two Tones spaced 1 MHz apart, 0 dBm/ tone at output.

Assembly Diagram

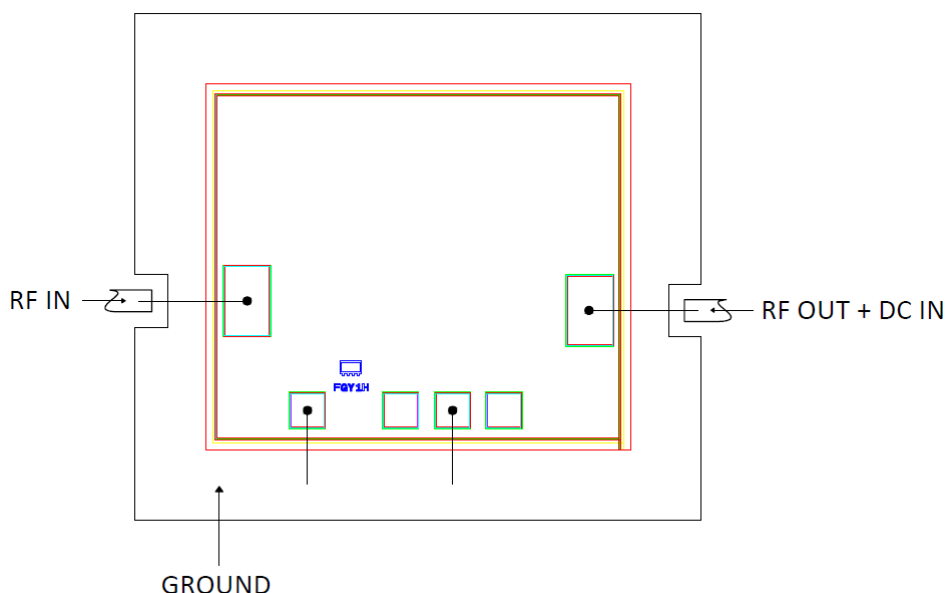

Assembly and Handling Procedure

1. Storage
Dice should be stored in a dry nitrogen purged desiccators or equivalent.
2. ESD
MMIC PHEMT amplifier dice are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic protected material, which should be opened in clean room conditions at an appropriately grounded anti-static workstation. Devices need careful handling using correctly designed collets, vacuum pickup tips or sharp antistatic tweezers to deter ESD damage to dice.
3. Die Attach
The die mounting surface must be clean and flat. Using conductive silver filled epoxy, recommended epoxies are DieMat DM6030HK-PT/H579 or Ablestik 84-1LMISR4. Apply sufficient epoxy to meet required epoxy bond line thickness, epoxy fillet height and epoxy coverage around total die periphery. Parts shall be cured in a nitrogen filled atmosphere per manufacturer's cure condition. It is recommended to use antistatic die pick up tools only.
4. Wire Bonding
Bond pad openings in the surface passivation above the bond pads are provided to allow wire bonding to the dice gold bond pads. Thermosonic bonding is used with minimized ultrasonic content. Bond force, time, ultrasonic power and temperature are all critical parameters. Suggested wire is pure gold, 1 mil diameter. Bonds must be made from the bond pads on the die to the package or substrate. All bond wires should be kept as short as low as reasonable to minimize performance degradation due to undesirable series inductance.

Additional Detailed Technical Information <i>additional information is available on our dash board.</i>	
Performance Data	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set with and without port extension(.zip file)
Case Style	Die
Die Ordering and packaging information	Quantity, Package
	Small, Gel - Pak: 5,10,50,100 KGD*
	Medium†, Partial wafer: KGD*<1845
	Large†, Full Wafer
	†Available upon request contact sales representative
	Refer to AN-60-067
Environmental Ratings	ENV80

*Known Good Dice ("KGD") means that the dice in question have been subjected to Mini-Circuits DC test performance criteria and measurement instructions and that the parametric data of such dice fall within a predefined range. While DC testing is not definitive, it does help to provide a higher degree of confidence that dice are capable of meeting typical RF electrical parameters specified by Mini-Circuits.

ESD Rating**

Human Body Model (HBM): Class 1B (pass 500V) in accordance with ANSI/ESD STM 5.1 - 2001

** Tested in industry standard SOT-89 package.

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp
- Mini-Circuits does not warrant the accuracy or completeness of the information, text, graphics and other items contained within this document and same are provided as an accommodation and on an "As is" basis, with all faults.
- Purchasers of this part are solely responsible for proper storing, handling, assembly and processing of Known Good Dice (including, without limitation, proper ESD preventative measures, die preparation, die attach, wire bond and related assembly and test activities), and Mini-Circuits assumes no responsibility therefor or for environmental effects on Known Good Dice.
- Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation d/b/a Mini-Circuits. All other third-party trademarks are the property of their respective owners. A reference to any third-party trademark does not constitute or imply any endorsement, affiliation, sponsorship, or recommendation by any such third-party of Mini-Circuits or its products.



Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 9.00V, Id = 116mA @ Temperature = +25°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	16.38	20.84	15.40	12.53	1.09	0.58	37.75	23.85	3.33
100	16.51	20.58	20.34	14.81	1.09	0.57	37.21	24.14	3.32
200	16.56	20.41	23.55	16.09	1.09	0.55	40.13	24.74	3.17
400	16.59	20.38	26.88	17.70	1.09	0.56	35.93	25.06	2.96
600	16.56	20.42	31.30	19.26	1.09	0.57	36.24	24.86	2.84
800	16.49	20.49	36.88	21.16	1.10	0.59	36.53	24.72	2.89
1000	16.46	20.50	34.07	23.90	1.11	0.60	36.90	24.26	2.78
1200	16.39	20.55	29.11	26.65	1.11	0.62	35.75	24.03	2.78
1400	16.30	20.60	26.25	29.45	1.12	0.63	35.95	24.32	2.81
1600	16.22	20.67	24.73	30.68	1.13	0.65	35.65	24.23	2.93
1800	16.12	20.76	24.15	29.50	1.14	0.66	35.28	24.29	2.93
2000	16.00	20.85	23.86	27.69	1.15	0.68	37.45	24.31	2.88
2200	15.92	20.92	24.41	26.49	1.16	0.69	35.08	24.24	2.89
2400	15.87	20.93	25.41	25.60	1.17	0.69	34.41	24.28	2.96
2600	15.81	20.97	26.22	24.74	1.17	0.70	36.09	24.70	2.98
2800	15.74	21.05	26.64	24.47	1.19	0.71	34.56	23.95	3.14
3000	15.69	21.09	26.42	25.65	1.19	0.71	34.60	23.59	3.20
3200	15.64	21.14	25.39	29.04	1.20	0.72	35.69	24.09	3.17
3400	15.60	21.24	22.93	42.09	1.21	0.73	35.45	22.85	3.23
3600	15.54	21.32	19.95	30.78	1.22	0.74	35.10	23.20	3.31
3800	15.48	21.43	17.15	22.88	1.23	0.75	34.72	23.32	3.31
4000	15.40	21.58	14.91	18.62	1.24	0.76	34.24	22.56	3.46
4200	15.32	21.71	13.12	15.82	1.24	0.76	34.88	22.83	3.52
4400	15.23	21.90	11.82	13.94	1.25	0.76	34.28	22.89	3.44
4600	15.16	22.01	10.97	12.72	1.24	0.76	34.94	22.66	3.52
4800	15.10	22.17	10.46	12.04	1.24	0.77	35.27	22.41	3.65
5000	15.09	22.25	10.33	11.84	1.24	0.78	35.08	22.59	3.59
5200	15.13	22.32	10.58	12.06	1.24	0.79	34.77	22.22	3.60
5400	15.20	22.37	11.15	12.62	1.23	0.81	34.80	22.78	3.73
5600	15.31	22.34	11.98	13.46	1.23	0.82	34.62	22.52	3.71
5800	15.45	22.32	12.95	14.29	1.22	0.82	34.73	22.49	3.79
6000	15.58	22.31	13.92	14.99	1.21	0.82	36.00	22.27	3.85
6200	15.72	22.27	14.70	15.58	1.20	0.81	36.22	21.71	3.99
6400	15.88	22.22	15.26	16.59	1.20	0.80	35.71	21.17	4.11
6600	16.02	22.19	15.08	19.07	1.20	0.80	35.85	20.46	4.23
6800	16.06	22.23	13.58	25.13	1.21	0.81	34.46	19.83	4.40
7000	15.92	22.49	11.02	24.69	1.23	0.84	33.45	18.67	4.61
7200	15.53	22.94	8.34	15.68	1.25	0.88	31.67	18.06	4.88
7400	14.85	23.73	6.19	11.03	1.29	0.91	30.04	16.93	5.04
7600	13.95	24.73	4.69	8.24	1.34	0.92	29.57	16.86	5.23
7800	12.99	25.76	3.70	6.49	1.39	0.91	28.60	15.95	5.39
8000	12.03	26.83	3.07	5.37	1.46	0.89	28.57	15.71	5.50
8200	11.20	27.67	2.70	4.53	1.51	0.84	27.93	15.37	5.58

Note: Test data of Die packaged in industry standard SOT-89 package



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS

REV. OR
PHA-83W-D+
1/29/2020
Page 1 of 3

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 8.5V, Id = 106mA @ Temperature = +25°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	16.35	20.85	15.47	12.53	1.10	0.58	35.63	23.26	3.29
100	16.48	20.54	20.54	14.90	1.09	0.57	36.10	23.59	3.26
200	16.54	20.41	23.93	16.21	1.09	0.56	35.64	24.19	3.12
400	16.56	20.38	27.55	17.84	1.09	0.56	37.61	24.49	2.92
600	16.53	20.43	32.39	19.40	1.10	0.58	37.08	24.30	2.86
800	16.46	20.47	37.55	21.33	1.10	0.60	36.70	24.15	2.79
1000	16.43	20.47	33.57	24.14	1.11	0.60	36.14	23.68	2.72
1200	16.36	20.54	28.74	27.11	1.11	0.62	35.68	23.44	2.75
1400	16.26	20.61	25.89	30.35	1.12	0.64	35.93	23.74	2.78
1600	16.18	20.68	24.53	32.19	1.13	0.65	35.57	23.64	2.88
1800	16.08	20.74	23.98	31.10	1.14	0.66	35.14	23.84	2.86
2000	15.95	20.84	23.81	28.97	1.16	0.68	35.36	23.73	2.85
2200	15.87	20.89	24.40	27.60	1.16	0.69	36.53	23.79	2.85
2400	15.82	20.94	25.41	26.42	1.17	0.70	34.53	23.70	2.86
2600	15.76	20.99	26.34	25.32	1.18	0.70	34.94	24.25	2.96
2800	15.69	21.06	26.85	24.78	1.19	0.71	32.94	23.37	3.08
3000	15.63	21.13	26.56	25.73	1.20	0.72	35.83	23.01	3.16
3200	15.57	21.18	25.56	28.41	1.21	0.73	34.65	23.63	3.24
3400	15.52	21.29	23.11	34.75	1.22	0.74	34.68	22.39	3.23
3600	15.46	21.37	20.08	29.94	1.23	0.75	34.08	22.73	3.28
3800	15.40	21.50	17.31	23.02	1.24	0.76	34.24	22.86	3.29
4000	15.32	21.61	15.05	18.90	1.25	0.76	34.58	22.09	3.37
4200	15.23	21.78	13.25	16.16	1.26	0.77	33.78	22.36	3.47
4400	15.15	21.94	11.94	14.33	1.26	0.77	33.98	22.42	3.46
4600	15.07	22.09	11.10	13.12	1.26	0.78	33.96	22.20	3.52
4800	15.02	22.20	10.60	12.49	1.26	0.78	35.16	22.06	3.57
5000	15.01	22.31	10.47	12.36	1.26	0.79	34.82	22.25	3.49
5200	15.04	22.40	10.73	12.69	1.26	0.81	33.45	21.89	3.52
5400	15.12	22.41	11.29	13.40	1.26	0.82	34.71	22.44	3.67
5600	15.22	22.42	12.17	14.49	1.26	0.83	35.35	22.19	3.70
5800	15.33	22.42	13.17	15.53	1.25	0.84	35.15	22.14	3.74
6000	15.45	22.42	14.18	16.36	1.25	0.83	35.35	21.91	3.83
6200	15.57	22.38	15.07	16.90	1.24	0.82	35.66	21.44	3.94
6400	15.69	22.37	15.75	17.81	1.24	0.81	35.38	20.77	4.08
6600	15.81	22.35	15.80	20.23	1.24	0.81	33.50	20.15	4.18
6800	15.83	22.43	14.44	27.28	1.25	0.82	33.19	19.50	4.36
7000	15.69	22.66	11.83	27.50	1.27	0.85	31.72	18.33	4.56
7200	15.33	23.11	9.02	16.62	1.30	0.89	30.25	17.62	4.72
7400	14.70	23.82	6.72	11.70	1.34	0.93	28.63	16.51	4.97
7600	13.86	24.78	5.08	8.77	1.39	0.94	28.17	16.49	5.08
7800	12.95	25.75	4.00	6.92	1.44	0.93	27.43	15.63	5.27
8000	12.04	26.69	3.29	5.72	1.49	0.91	27.62	15.54	5.45
8200	11.25	27.51	2.87	4.83	1.54	0.87	26.94	15.10	5.47

Note: Test data of Die packaged in industry standard SOT-89 package



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS



REV. OR
PHA-83W-D+
1/29/2020
Page 2 of 3

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 9.5V, Id = 125mA @ Temperature = +25°C

FREQ	Gain	Isolation	Input Return Loss	Output Return Loss	Stability		IP-3 Output	1dB Comp. Output	Noise Figure
(MHz)	(dB)	(dB)	(dB)	(dB)	K	Measure	(dBm)	(dBm)	(dB)
50	16.39	20.90	15.34	12.60	1.10	0.58	36.69	24.23	3.42
100	16.52	20.56	20.24	14.80	1.09	0.56	36.65	24.50	3.39
200	16.58	20.41	23.33	16.04	1.09	0.55	38.06	25.08	3.22
400	16.61	20.38	26.51	17.62	1.09	0.56	36.67	25.41	3.00
600	16.58	20.43	30.64	19.14	1.09	0.57	36.23	25.21	2.94
800	16.51	20.49	36.25	21.04	1.10	0.59	36.94	25.08	2.83
1000	16.48	20.48	34.39	23.76	1.10	0.60	36.14	24.62	2.76
1200	16.41	20.55	29.40	26.41	1.11	0.61	37.18	24.53	2.80
1400	16.32	20.62	26.33	28.86	1.12	0.63	37.35	24.69	2.79
1600	16.24	20.68	24.84	29.76	1.13	0.64	35.79	24.60	2.90
1800	16.14	20.74	24.17	28.65	1.14	0.66	36.47	24.78	2.93
2000	16.02	20.86	23.84	26.81	1.15	0.68	35.57	24.67	2.93
2200	15.94	20.91	24.44	25.72	1.16	0.69	35.66	24.73	2.94
2400	15.89	20.93	25.30	24.94	1.16	0.69	35.62	24.65	3.08
2600	15.84	20.96	26.09	24.31	1.17	0.69	35.69	25.06	3.02
2800	15.78	21.03	26.44	24.10	1.18	0.70	36.02	24.31	3.12
3000	15.73	21.06	26.19	25.38	1.19	0.71	35.10	23.96	3.20
3200	15.68	21.13	25.18	28.74	1.20	0.72	34.78	24.45	3.27
3400	15.64	21.21	22.75	39.25	1.21	0.73	35.45	23.21	3.25
3600	15.59	21.28	19.78	29.99	1.21	0.74	35.91	23.57	3.39
3800	15.53	21.40	17.02	22.45	1.22	0.74	35.43	23.58	3.37
4000	15.46	21.48	14.77	18.27	1.22	0.75	34.07	22.91	3.48
4200	15.37	21.64	12.98	15.54	1.23	0.75	34.44	23.18	3.54
4400	15.29	21.84	11.68	13.64	1.23	0.76	34.55	23.14	3.52
4600	15.21	21.98	10.83	12.42	1.23	0.76	33.49	22.89	3.56
4800	15.15	22.11	10.35	11.72	1.23	0.76	34.71	22.74	3.66
5000	15.14	22.24	10.22	11.48	1.23	0.77	35.11	22.81	3.56
5200	15.18	22.28	10.46	11.64	1.22	0.79	34.16	22.43	3.72
5400	15.26	22.32	11.00	12.10	1.21	0.80	35.43	22.99	3.76
5600	15.38	22.30	11.81	12.84	1.20	0.81	34.34	22.73	3.80
5800	15.52	22.29	12.76	13.53	1.20	0.81	34.36	22.72	3.87
6000	15.67	22.18	13.70	14.16	1.18	0.81	36.27	22.51	3.93
6200	15.83	22.21	14.43	14.77	1.18	0.80	36.39	21.96	4.10
6400	16.00	22.11	14.87	15.79	1.17	0.79	36.59	21.44	4.19
6600	16.16	22.08	14.54	18.10	1.17	0.79	34.63	20.74	4.31
6800	16.21	22.13	12.95	22.59	1.18	0.80	34.01	20.13	4.50
7000	16.06	22.38	10.41	21.50	1.19	0.83	33.79	19.08	4.69
7200	15.63	22.89	7.84	14.64	1.22	0.87	32.22	18.46	4.87
7400	14.91	23.71	5.80	10.41	1.26	0.90	30.75	17.32	5.11
7600	13.96	24.80	4.39	7.81	1.31	0.91	30.35	17.21	5.26
7800	12.96	25.85	3.48	6.16	1.36	0.90	29.35	16.40	5.44
8000	11.97	26.94	2.91	5.10	1.43	0.87	29.63	16.14	5.61
8200	11.11	27.86	2.58	4.32	1.49	0.83	28.72	15.78	5.62

Note: Test data of Die packaged in industry standard SOT-89 package



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com










IF/RF MICROWAVE COMPONENTS



REV. OR
 PHA-83W-D+
 1/29/2020
 Page 3 of 3

Typical Performance Curves

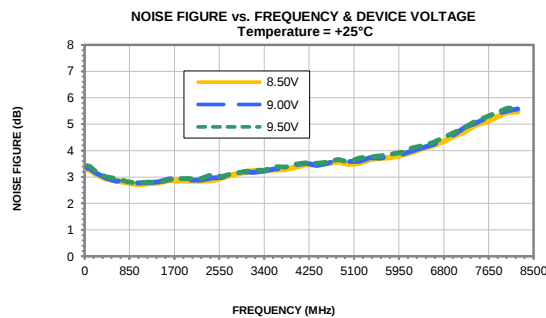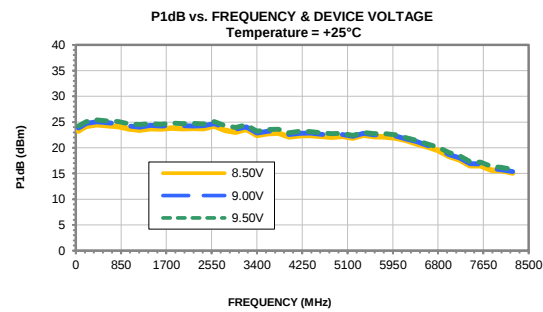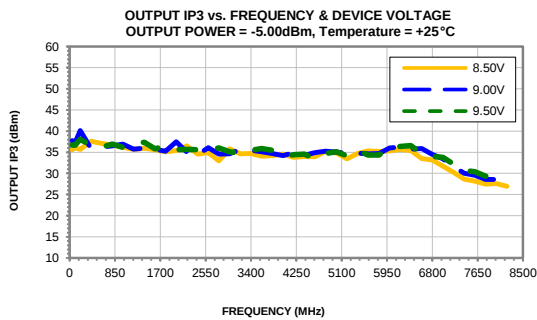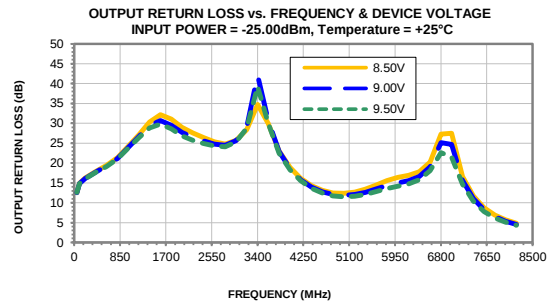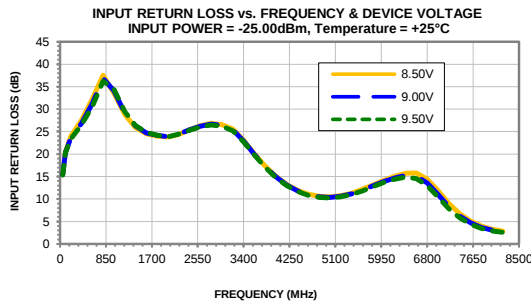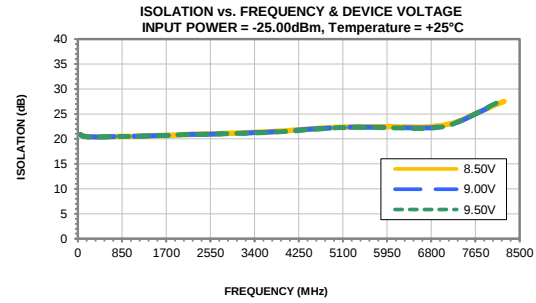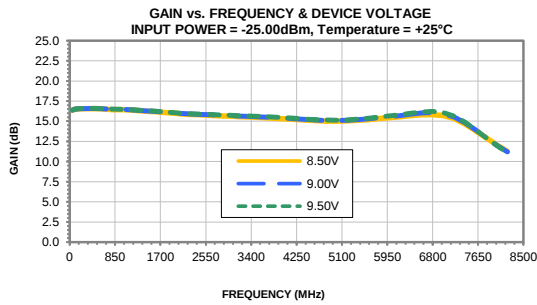

Note: Test data of Die packaged in industry standard SOT-89 package