



LOW NOISE, HIGH IP3

Monolithic Amplifier

PMA-5452+

50Ω 0.05 to 6 GHz

THE BIG DEAL

- Single Positive Supply Voltage, 3V, Id=40mA
- Ultra Low Noise Figure, 0.6 dB typ. at 0.5 GHz
- High IP3, 32 dBm typ. 1GHz
- Gain, 19 dB typ. at 1 GHz
- Output Power, up to +18.5dBm typ.
- Micro-miniature size, 3mm x 3mm
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: DQ849

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Cellular
- ISM
- GSM
- WCDMA
- LTE
- WiMAX
- WLAN
- UNII and HIPERLAN

PRODUCT OVERVIEW

Mini-Circuits PMA-5452+ is a E-PHEMT* based Ultra-Low Noise MMIC Amplifier operating from 50 MHz to 6 GHz with a unique combination of low noise and high IP3 making this amplifier ideal for sensitive receiver applications. This design operates on a single 3V supply at only 40mA and is internally matched to 50 Ohms.

KEY FEATURES

Feature	Advantages
Ultra Low Noise, 0.6dB	Outstanding Noise Figure, measured in a 50 Ohm environment without any external matching
High IP3, 32 dBm	Combining Low Noise and High IP3 makes this MMIC amplifier ideal for Low Noise Receiver Front End (RFE) because it gives the user advantages at both ends of the dynamic range: sensitivity & two-tone spur-free dynamic range
Low Current, 40 mA	At only 40mA, the PMA-5452+ is ideal for remote applications with limited available power or densely packed applications where thermal management is critical.
Broad Band	Operating over a broadband the PMA-5452+ covers the primary wireless communications bands: Cellular, PCS, LTE, WiMAX
Internally Matched	No external matching elements required to achieve the advertised noise and output power over the full band
MCLP Package	Low Inductance, repeatable transitions, excellent thermal pad
Max Input Power, +20 dBm	Ruggedized design operates up to input powers of +20dBm without the need of an external limiter
High Reliability	Low, small signal operating current of 40 mA nominal maintains junction temperatures typically below 105°C at 85°C ground lead temperature

*Enhancement mode Pseudomorphic High Electron Mobility Transistor.

 REV. E
 ECO-013311
 PMA-5452+
 TH/RS/CP
 220518
Mini-Circuits®www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 5



LOW NOISE, HIGH IP3

Monolithic Amplifier

PMA-5452+

Mini-Circuits

ELECTRICAL SPECIFICATIONS⁽¹⁾ AT 25°C, ZO=50Ω, (REFER TO CHARACTERIZATION CIRCUIT, FIG. 1)

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		0.05		6.0	GHz
DC Voltage (V_d)			3.0		V
DC Current (I_d) ⁽⁶⁾		28	40	54	mA
DC Current (I_{Rbias})			2.4		mA
Noise Figure	0.05		1.2	—	
	0.5		0.6	—	
	1.0		0.7	—	
	2.0		0.9	1.3	
	3.0		1.3	—	
	4.0		1.5	—	
	5.0		1.9	—	
	6.0		2.1	—	
Gain	0.05	—	25.1	—	
	0.5	—	22.6	—	
	1.0	—	19.0	—	
	2.0	12.6	14.0	15.4	
	3.0	—	11.0	—	
	4.0	—	8.7	—	
	5.0	—	6.9	—	
	6.0	—	5.5	—	
Input Return Loss	0.05-0.5 0.5-6		9.0 7.0		dB
Output Return Loss	0.05-0.1 0.1-6		13.0 18.0		dB
Output IP3	0.05		29.6		
	0.5		30.7		
	1.0		32.1		
	2.0		34.1		
	3.0		34.9		
	4.0		34.5		
	5.0		35.3		
	6.0		35.8		
Output Power @ 1 dB compression ⁽²⁾	0.05		18.4		
	0.5		18.5		
	1.0		18.4		
	2.0		18.3		
	3.0		18.3		
	4.0		18.5		
	5.0		18.8		
	6.0		18.9		
DC Current Variation vs. Temperature ⁽³⁾			-0.035		mA/°C
Thermal Resistance			128		°C/W

MAXIMUM RATINGS⁽⁴⁾

Parameter	Ratings
Operating Temperature ⁽⁵⁾	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Channel Temperature	150°C
DC Voltage (Pad 6)	5V
Power Dissipation	500mW
DC Current (Pad 6)	100mA
Bias Current (Pad 7)	10mA
Input Power ⁽⁷⁾	+20dBm

(1) Measured on Mini-Circuits Characterization test board TB-502+. See Characterization Test Circuit (Fig. 1)

(2) P1dB specified with external current limiting of 50mA; Capable of higher P1dB at higher current (see Fig. 2)

(3) Current at 85°C - Current at -45°C/130

(4) Permanent damage may occur if any of these limits are exceeded. These maximum ratings are not intended for continuous normal operation.

(5) Defined with reference to ground pad temperature.

(6) Specified DC current consumption is under small signal conditions. Current will increase with input RF Power. To maintain maximum current consumption, external DC current limiting circuits are required on V_d line.(7) Maximum input power is specified based upon external V_d current limiting of 60 mA. Maximum input power will degrade without external current limiting.

Mini-Circuits®




LOW NOISE, HIGH IP3

Monolithic Amplifier

PMA-5452+

Mini-Circuits

SIMPLIFIED SCHEMATIC AND PAD DESCRIPTION

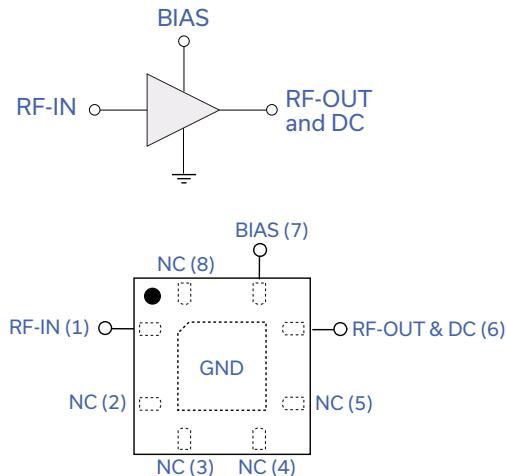

Function	Pad Number	Description (See Figure 1)
RF-IN	1	RF input pad
RF-OUT & DC	6	RF output pad (connected to RF-OUT via blocking external cap C2, and Supply voltage Vs via RF Choke L1)
Bias	7	Bias pad (connected to Vs via Rbias)
GND	paddle in center of bottom	Connected to ground
NOT USED	2,3,4,5,8	No internal connection; recommended use: per PCB Layout PL-299

CHARACTERIZATION TEST CIRCUIT

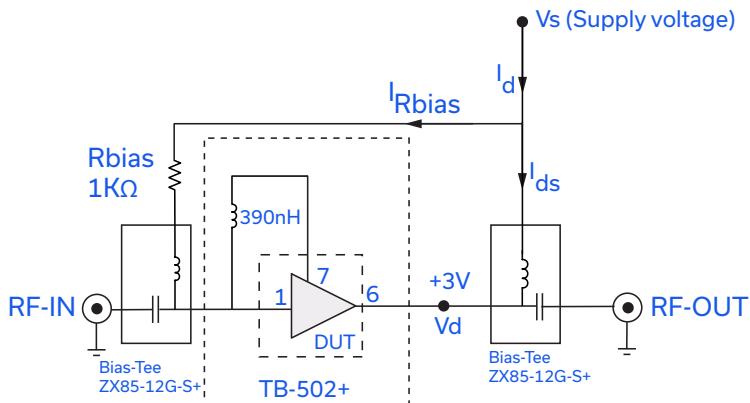


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization Test Board TB-502+) Gain, Output power at 1dB compression (P1dB), Output IP3 (OIP3) and Noise Figure measured using Agilent's N5242A PNA-X Microwave network analyzer.

Conditions:

1. Gain: Pin=-25 dBm
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 5 dBm/tone at output.
3. Vs adjusted for 3V at device (Vd), compensating loss of bias tee.


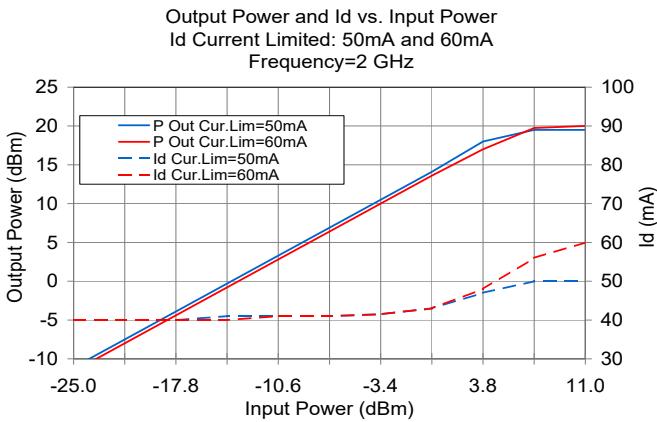


Fig 2. Output Power and Id vs. Input Power and Frequency.

Performance measured on Mini-Circuits Characterization test board TB-502+. See Characterization Test Circuit (Fig. 1) Measurements performed with current (Id) limited as noted.



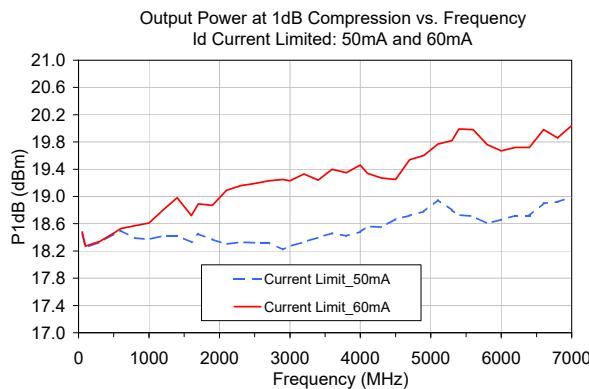

LOW NOISE, HIGH IP3

Monolithic Amplifier

PMA-5452+

Mini-Circuits

RECOMMENDED APPLICATION CIRCUIT

(refer to evaluation board for PCB Layout and component values)


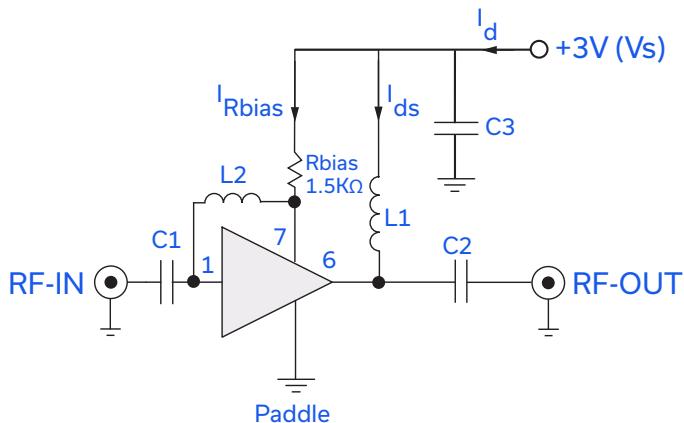


Fig 3. Recommended Application Circuit
Note: Resistance of L1, 0.1-0.2Ω typically

Typical Current (I_d) as a function of R_{bias}
($V_d = 3V$)



PRODUCT MARKING

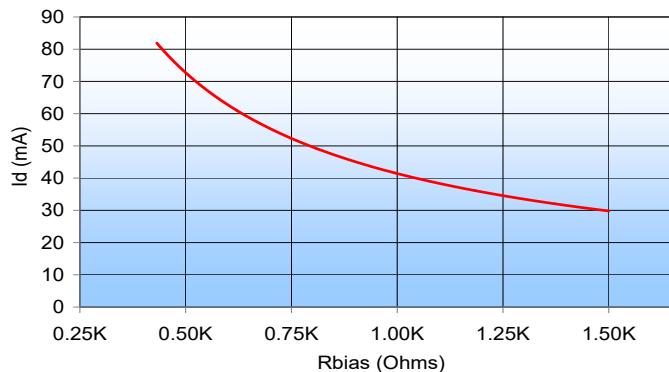

black body

model family designation

Marking may contain other features or characters for internal lot control

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 4 OF 5



LOW NOISE, HIGH IP3

Monolithic Amplifier

PMA-5452+

Mini-Circuits

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS [CLICK HERE](#)

Performance Data	Data Table Swept Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	Case Style: DQ849 Plastic package, exposed paddle, lead finish: tin-silver over nickel
Tape & Reel	F104
Standard quantities available on reel	Standard quantities available on reel: 7" reels with 20, 50, 100, 200, 500, 1K, or 2K devices
Suggested Layout for PCB Design	PL-299
Evaluation Board	TB-501-2+ (50-5000 MHz)
Environmental Ratings	ENV08T1

ESD RATING


Human Body Model (HBM): Class 1A (250V to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (<100V) in accordance with ANSI/ESD STM5.2-1999; passes 40V

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL TEST FLOW CHART

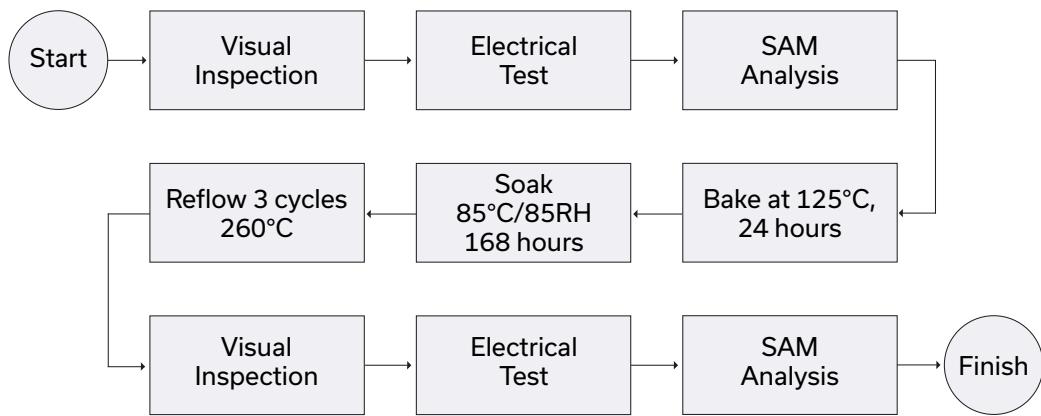

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 5 OF 5

*Typical Performance Data***NOTE: Use PDF Bookmarks to view DATA at required conditions****Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=1k ohms, Id=43 mA @ Temperature = +25degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (1)		Noise Figure (dB)
								Current Limit 50mA (dBm)	Current Limit 60mA (dBm)	
50.00	25.31	31.84	10.49	11.50	1.15	0.78	30.40	18.44	18.48	1.02
100.00	25.22	30.14	10.38	16.40	1.06	0.75	30.41	18.25	18.27	0.74
300.00	24.16	29.12	9.20	22.49	1.03	0.82	31.08	18.33	18.34	0.61
500.00	22.65	28.15	8.05	23.81	1.03	0.90	30.92	18.45	18.46	0.57
600.00	21.87	27.55	7.64	24.06	1.03	0.92	31.66	18.50	18.53	0.64
800.00	20.35	26.42	7.05	24.35	1.04	0.96	32.39	18.39	18.57	0.64
1000.00	18.97	25.45	6.69	24.16	1.06	0.99	32.72	18.37	18.61	0.63
1200.00	17.72	24.51	6.39	23.74	1.07	1.01	33.86	18.42	18.80	0.77
1400.00	16.63	23.62	6.23	23.37	1.08	1.02	33.44	18.42	18.98	0.83
1600.00	15.63	22.77	6.06	22.85	1.09	1.03	33.84	18.33	18.72	0.86
1700.00	15.16	22.42	5.98	22.87	1.09	1.04	34.05	18.45	18.89	0.88
1900.00	14.34	21.67	5.97	22.60	1.10	1.04	34.44	18.37	18.87	0.87
2100.00	13.57	20.96	5.88	22.37	1.10	1.05	34.70	18.30	19.09	0.85
2300.00	12.89	20.33	5.90	22.56	1.11	1.05	34.73	18.33	19.16	1.02
2500.00	12.20	19.77	6.15	23.55	1.13	1.04	34.80	18.32	19.19	1.06
2700.00	11.48	19.23	5.81	21.68	1.12	1.07	34.91	18.32	19.23	1.32
2900.00	11.10	18.55	6.01	22.76	1.11	1.04	35.36	18.22	19.25	1.18
3000.00	10.85	18.27	6.11	23.12	1.12	1.04	35.43	18.27	19.23	1.11
3200.00	10.36	17.75	6.18	23.28	1.12	1.03	35.67	18.33	19.33	1.15
3400.00	9.93	17.26	6.40	24.05	1.13	1.02	35.36	18.40	19.24	1.18
3600.00	9.52	16.77	6.60	24.11	1.13	1.01	35.59	18.46	19.40	1.18
3800.00	9.14	16.31	6.72	24.29	1.13	1.00	35.29	18.42	19.35	1.27
4000.00	8.78	15.89	6.98	24.01	1.14	0.99	35.31	18.48	19.46	1.23
4100.00	8.56	15.71	7.02	23.37	1.14	0.99	35.56	18.56	19.34	1.38
4300.00	8.13	15.40	7.15	22.52	1.16	0.99	34.68	18.55	19.27	1.49
4500.00	7.79	14.95	7.36	21.79	1.16	0.97	34.91	18.67	19.25	1.59
4700.00	7.32	14.73	7.64	20.66	1.20	0.96	34.89	18.72	19.54	1.78
4900.00	7.10	14.31	7.12	20.58	1.16	0.97	36.24	18.78	19.60	1.69
5100.00	6.89	13.93	6.94	20.11	1.14	0.96	36.69	18.95	19.77	1.80
5300.00	6.61	13.62	6.74	19.45	1.13	0.97	36.62	18.80	19.82	1.67
5400.00	6.47	13.47	6.67	18.96	1.13	0.96	36.13	18.73	19.99	1.76
5600.00	6.18	13.20	6.53	18.00	1.13	0.96	36.46	18.71	19.98	1.85
5800.00	5.89	12.98	6.36	17.16	1.13	0.97	37.08	18.60	19.76	1.92
6000.00	5.60	12.72	6.10	16.49	1.12	0.97	36.94	18.66	19.67	2.02
6200.00	5.31	12.52	5.85	15.73	1.11	0.98	36.86	18.72	19.72	1.98
6400.00	5.03	12.34	5.63	15.22	1.11	0.98	36.71	18.72	19.72	2.13
6600.00	4.72	12.18	5.45	14.46	1.11	0.99	36.23	18.90	19.98	2.34
6800.00	4.37	12.09	5.28	13.88	1.12	0.99	36.56	18.92	19.86	2.30
7000.00	3.87	12.13	5.66	13.17	1.19	0.98	36.85	18.99	20.04	2.80

(1) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

MMIC Amplifier

PMA-5452+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=1k ohms, Id=45 mA @ Temperature = -45degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	Noise Figure (dB)
50.0	25.56	30.19	11.76	11.55	1.01	0.67	30.76	0.82
100.0	25.28	30.10	12.18	16.77	1.06	0.74	31.07	0.54
300.0	24.22	29.16	10.48	23.04	1.06	0.79	31.66	0.52
500.0	22.80	28.16	8.86	23.41	1.06	0.85	31.53	0.40
600.0	22.05	27.63	8.31	23.41	1.06	0.87	32.39	0.48
800.0	20.59	26.60	7.55	22.93	1.07	0.92	33.05	0.46
1000.0	19.25	25.55	7.04	22.35	1.08	0.94	33.49	0.54
1200.0	18.02	24.55	6.68	21.72	1.08	0.96	34.56	0.64
1400.0	16.95	23.67	6.45	21.41	1.09	0.98	34.25	0.59
1600.0	15.95	22.84	6.24	20.81	1.09	0.99	34.53	0.44
1700.0	15.50	22.36	6.15	20.92	1.09	1.00	34.69	0.79
1900.0	14.68	21.59	6.10	20.62	1.09	1.00	35.16	0.58
2100.0	13.92	20.89	5.99	20.61	1.09	1.01	35.26	0.61
2300.0	13.26	20.17	5.99	20.60	1.09	1.00	35.44	0.80
2500.0	12.55	19.68	6.25	21.38	1.12	1.00	35.61	0.71
2700.0	11.74	19.21	5.88	20.36	1.11	1.04	35.60	1.14
2900.0	11.48	18.37	6.05	21.11	1.09	1.00	36.12	0.88
3000.0	11.23	18.10	6.15	21.42	1.09	1.00	36.06	0.84
3200.0	10.76	17.59	6.27	21.84	1.09	0.99	36.46	0.81
3400.0	10.33	17.08	6.46	22.46	1.10	0.98	36.21	0.82
3600.0	9.93	16.56	6.66	22.86	1.10	0.97	36.30	0.90
3800.0	9.55	16.09	6.78	23.15	1.10	0.96	36.18	1.03
4000.0	9.20	15.65	7.05	23.32	1.10	0.94	36.05	0.78
4100.0	8.98	15.47	7.08	22.91	1.10	0.94	36.41	0.94
4300.0	8.55	15.14	7.17	21.74	1.12	0.94	35.59	1.01
4500.0	8.22	14.72	7.37	21.27	1.12	0.92	35.66	1.10
4700.0	7.79	14.45	7.57	19.72	1.14	0.92	35.64	1.08
4900.0	7.41	14.16	7.25	19.27	1.14	0.93	37.10	1.06
5100.0	7.28	13.72	6.91	18.79	1.11	0.92	37.59	1.32
5300.0	7.02	13.39	6.71	18.41	1.09	0.92	37.62	1.24
5400.0	6.85	13.26	6.59	17.65	1.09	0.92	36.97	1.15
5600.0	6.57	12.99	6.48	17.07	1.09	0.92	37.24	1.40
5800.0	6.28	12.74	6.32	16.27	1.09	0.92	37.99	1.39
6000.0	6.01	12.52	6.12	15.84	1.08	0.92	37.82	1.53
6200.0	5.71	12.31	5.80	15.02	1.08	0.93	37.88	1.37
6400.0	5.44	12.12	5.59	14.59	1.07	0.94	37.53	1.69
6600.0	5.13	11.96	5.35	13.76	1.07	0.94	37.19	1.49
6800.0	4.83	11.81	5.14	13.42	1.07	0.95	37.47	1.92
7000.0	4.39	11.82	5.27	12.55	1.11	0.94	37.83	1.93



P.O. Box 350168, Brooklyn, New York 11235-0000 (718) 934-4500 Fax (718) 932-4651 For detailed performance specs & shopping online see Mini-Circuits web site
 minicircuits.com

If/RF MICROWAVE COMPONENTS

REV. X1

PMA-5452+

10/19/2009

Page 2 of 6

MMIC Amplifier

PMA-5452+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Rbias=1k ohms, Id=42 mA @ Temperature = +85degC

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	Noise Figure (dB)
					K	Measure		
50.0	24.95	31.99	9.28	10.79	1.17	0.79	29.74	1.22
100.0	25.03	30.32	8.92	14.58	1.06	0.78	29.71	0.94
300.0	23.99	29.03	8.17	18.60	1.00	0.85	30.38	0.72
500.0	22.43	27.80	7.36	20.27	0.98	0.92	30.25	0.71
600.0	21.64	27.22	7.09	21.12	0.98	0.95	31.15	0.77
800.0	20.08	26.15	6.66	22.29	1.00	0.99	31.77	0.78
1000.0	18.70	25.24	6.41	23.42	1.03	1.02	32.06	0.86
1200.0	17.45	24.36	6.18	23.88	1.05	1.05	33.31	0.95
1400.0	16.35	23.51	6.05	24.21	1.06	1.06	32.77	0.94
1600.0	15.34	22.75	5.91	24.02	1.08	1.07	33.36	1.02
1700.0	14.87	22.40	5.84	24.16	1.09	1.08	33.45	1.36
1900.0	14.04	21.68	5.85	23.96	1.10	1.08	33.82	1.08
2100.0	13.27	21.04	5.78	23.88	1.11	1.09	34.04	1.16
2300.0	12.58	20.42	5.80	24.04	1.12	1.09	34.14	1.21
2500.0	11.89	19.91	6.03	25.03	1.15	1.08	34.28	1.27
2700.0	11.18	19.36	5.77	22.74	1.14	1.10	34.40	1.57
2900.0	10.78	18.69	5.95	23.93	1.13	1.08	34.75	1.43
3000.0	10.52	18.43	6.05	24.18	1.14	1.07	34.81	1.38
3200.0	10.03	17.94	6.12	24.34	1.15	1.07	35.03	1.47
3400.0	9.58	17.46	6.36	25.08	1.16	1.06	34.87	1.48
3600.0	9.17	16.99	6.55	24.77	1.17	1.05	34.89	1.60
3800.0	8.79	16.54	6.68	24.57	1.17	1.04	34.83	1.54
4000.0	8.42	16.10	6.91	24.10	1.17	1.02	34.80	1.72
4100.0	8.20	15.95	6.94	23.41	1.18	1.02	35.09	1.93
4300.0	7.76	15.63	7.09	22.59	1.20	1.02	34.20	2.00
4500.0	7.43	15.23	7.28	22.24	1.21	1.00	34.48	1.85
4700.0	6.99	14.97	7.53	21.31	1.24	1.00	34.48	2.10
4900.0	6.74	14.56	7.12	21.27	1.21	1.00	35.74	2.13
5100.0	6.53	14.17	6.89	20.80	1.18	1.00	36.24	2.11
5300.0	6.26	13.84	6.69	20.11	1.17	1.00	36.08	2.09
5400.0	6.13	13.70	6.66	19.85	1.17	1.00	35.68	2.18
5600.0	5.85	13.40	6.53	18.77	1.16	1.00	36.00	2.30
5800.0	5.54	13.18	6.31	17.88	1.16	1.01	36.59	2.43
6000.0	5.26	12.93	6.11	16.99	1.15	1.01	36.48	2.62
6200.0	4.98	12.75	5.88	16.40	1.15	1.02	36.38	2.54
6400.0	4.70	12.55	5.68	15.93	1.14	1.02	36.06	2.79
6600.0	4.39	12.37	5.51	15.15	1.15	1.02	35.69	2.71
6800.0	4.05	12.28	5.37	14.61	1.16	1.03	36.05	2.90
7000.0	3.57	12.28	5.63	13.73	1.23	1.02	36.31	3.49



P.O. Box 350168, Brooklyn, New York 11235-0000 (718) 934-4500 Fax (718) 932-4651 For detailed performance specs & shopping online see Mini-Circuits web site
 minicircuits.com

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/MICROWAVE COMPONENTS

REV. X1

PMA-5452+

10/19/2009

Page 3 of 6

MMIC Amplifier

PMA-5452+

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)
 Gain(Power Gain) = S21 (dB)
 Reverse Isolation = -S12 (dB)
 Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=30mA @ Temperature = +25degC (1)

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (2)		FREQ (MHz)	Noise Figure (dB)
								Current Limit 50mA	Current Limit 60mA		
50.0	24.28	30.23	9.58	9.98	1.09	0.70	27.17	18.44	18.48	50.0	1.04
100.0	24.36	29.65	9.39	13.82	1.07	0.75	27.26	18.25	18.27	100.0	0.79
300.0	23.49	28.50	8.37	17.69	1.01	0.83	27.46	18.33	18.34	400.0	0.65
500.0	22.12	27.36	7.46	19.83	0.98	0.90	27.87	18.45	18.46	600.0	0.70
600.0	21.39	26.84	7.08	20.91	0.98	0.94	28.17	18.50	18.53	800.0	0.74
800.0	19.94	25.92	6.55	23.00	0.99	1.00	28.71	18.39	18.57	1100.0	0.81
1000.0	18.60	25.01	6.21	24.91	1.01	1.03	28.94	18.37	18.61	1300.0	0.86
1200.0	17.39	24.23	5.96	26.26	1.03	1.06	29.98	18.42	18.80	1600.0	0.93
1400.0	16.30	23.45	5.79	27.12	1.05	1.08	29.68	18.42	18.98	1800.0	1.04
1600.0	15.33	22.69	5.68	27.27	1.06	1.09	30.16	18.33	18.72	2000.0	0.90
1700.0	14.88	22.36	5.63	27.33	1.07	1.09	30.87	18.45	18.89	2300.0	1.05
1900.0	14.06	21.67	5.60	26.62	1.08	1.10	30.22	18.37	18.87	2500.0	1.11
2100.0	13.32	21.01	5.58	26.63	1.09	1.10	29.84	18.30	19.09	2700.0	1.57
2300.0	12.65	20.37	5.61	26.89	1.09	1.10	30.31	18.33	19.16	3000.0	1.13
2500.0	12.04	19.76	5.71	26.95	1.10	1.09	30.77	18.32	19.19	3200.0	1.18
2700.0	11.18	19.46	5.57	23.77	1.13	1.12	30.79	18.32	19.23	3400.0	1.29
2900.0	10.94	18.64	5.75	25.55	1.10	1.09	30.80	18.22	19.25	3700.0	1.25
3000.0	10.71	18.37	5.82	25.57	1.10	1.08	31.12	18.27	19.23	3900.0	1.37
3200.0	10.28	17.82	5.95	25.55	1.10	1.07	30.73	18.33	19.33	4100.0	1.46
3400.0	9.86	17.31	6.09	25.46	1.10	1.06	31.67	18.40	19.24	4400.0	1.61
3600.0	9.47	16.83	6.21	25.14	1.10	1.05	31.70	18.46	19.40	4600.0	1.66
3800.0	9.08	16.37	6.35	24.63	1.11	1.04	31.51	18.42	19.35	4900.0	1.99
4000.0	8.71	15.95	6.43	23.78	1.11	1.03	30.50	18.48	19.46	5100.0	1.89
4100.0	8.51	15.76	6.46	23.20	1.11	1.03	31.22	18.56	19.34	5300.0	1.75
4300.0	8.10	15.43	6.43	21.75	1.12	1.03	30.18	18.55	19.27	5600.0	1.93
4500.0	7.78	15.06	6.38	20.88	1.11	1.02	31.38	18.67	19.25	5800.0	2.18
4700.0	7.43	14.73	6.48	20.00	1.13	1.01	30.84	18.72	19.54	6000.0	2.24
4900.0	6.89	14.58	6.76	19.14	1.18	1.00	31.40	18.78	19.60	6400.0	2.34
5100.0	6.79	14.04	6.00	18.87	1.10	1.02	31.34	18.95	19.77	6600.0	2.56
5300.0	6.52	13.74	5.79	18.15	1.09	1.02	31.76	18.80	19.82	6800.0	2.68
5400.0	6.38	13.59	5.71	17.77	1.09	1.02	30.79	18.73	19.99	7000.0	2.88
5600.0	6.09	13.34	5.54	17.06	1.08	1.02	31.39	18.71	19.98		
5800.0	5.80	13.08	5.36	16.39	1.07	1.03	32.51	18.60	19.76		
6000.0	5.49	12.87	5.26	15.81	1.08	1.03	32.01	18.66	19.67		
6200.0	5.22	12.66	5.05	15.28	1.07	1.03	31.20	18.72	19.72		
6400.0	4.95	12.42	4.86	14.82	1.06	1.04	31.14	18.72	19.72		
6600.0	4.67	12.23	4.73	14.35	1.06	1.04	32.35	18.90	19.98		
6800.0	4.38	12.07	4.60	13.93	1.06	1.04	31.48	18.92	19.86		
7000.0	4.02	12.00	4.58	13.40	1.08	1.04	32.75	18.99	20.04		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=40mA @ Temperature = +25degC (1)

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (2)		FREQ (MHz)	Noise Figure (dB)
								K	Measure		
50.0	25.04	30.64	10.27	10.94	1.09	0.70	29.36	18.44	18.48	50.0	1.02
100.0	25.02	30.24	10.20	15.66	1.08	0.76	29.45	18.25	18.27	100.0	0.74
300.0	24.04	29.05	8.95	21.17	1.03	0.82	29.85	18.33	18.34	400.0	0.64
500.0	22.59	27.97	7.82	23.62	1.02	0.90	30.42	18.45	18.46	600.0	0.66
600.0	21.82	27.37	7.38	24.57	1.01	0.93	30.80	18.50	18.53	800.0	0.73
800.0	20.32	26.35	6.77	25.94	1.02	0.98	31.43	18.39	18.57	1100.0	0.79
1000.0	18.95	25.42	6.40	26.46	1.04	1.01	31.69	18.37	18.61	1300.0	0.84
1200.0	17.71	24.49	6.14	26.14	1.05	1.03	32.80	18.42	18.80	1600.0	0.91
1400.0	16.61	23.64	5.96	25.71	1.06	1.05	32.51	18.42	18.98	1800.0	1.04
1600.0	15.63	22.83	5.84	25.07	1.07	1.06	33.04	18.33	18.72	2000.0	0.86
1700.0	15.17	22.45	5.78	24.93	1.08	1.06	33.82	18.45	18.89	2300.0	0.97
1900.0	14.34	21.73	5.75	24.28	1.09	1.06	33.16	18.37	18.87	2500.0	0.99
2100.0	13.59	21.01	5.74	24.23	1.09	1.06	32.84	18.30	19.09	2700.0	1.54
2300.0	12.92	20.33	5.76	24.37	1.09	1.06	33.46	18.33	19.16	3000.0	1.11
2500.0	12.31	19.68	5.87	24.60	1.10	1.05	33.85	18.32	19.19	3200.0	1.17
2700.0	11.44	19.36	5.72	22.78	1.12	1.09	33.87	18.32	19.23	3400.0	1.31
2900.0	11.20	18.52	5.91	23.65	1.10	1.05	34.01	18.22	19.25	3700.0	1.24
3000.0	10.97	18.24	5.99	23.82	1.10	1.04	34.31	18.27	19.23	3900.0	1.39
3200.0	10.53	17.71	6.12	24.04	1.10	1.03	33.96	18.33	19.33	4100.0	1.57
3400.0	10.10	17.15	6.27	24.09	1.10	1.02	35.06	18.40	19.24	4400.0	1.60
3600.0	9.71	16.67	6.39	24.04	1.10	1.01	34.88	18.46	19.40	4600.0	1.64
3800.0	9.32	16.21	6.53	23.80	1.10	1.00	34.79	18.42	19.35	4900.0	2.01
4000.0	8.94	15.79	6.60	23.11	1.10	0.99	33.95	18.48	19.46	5100.0	1.75
4100.0	8.74	15.60	6.63	22.59	1.10	0.99	34.68	18.56	19.34	5300.0	1.76
4300.0	8.34	15.25	6.59	21.24	1.10	0.99	33.55	18.55	19.27	5600.0	1.88
4500.0	8.01	14.88	6.56	20.24	1.10	0.98	34.89	18.67	19.25	5800.0	2.06
4700.0	7.65	14.57	6.64	19.32	1.12	0.97	34.46	18.72	19.54	6000.0	2.19
4900.0	7.11	14.40	6.91	18.34	1.16	0.97	34.84	18.78	19.60	6400.0	2.26
5100.0	7.01	13.89	6.14	18.17	1.09	0.98	34.68	18.95	19.77	6600.0	2.49
5300.0	6.74	13.58	5.92	17.45	1.08	0.98	35.34	18.80	19.82	6800.0	2.70
5400.0	6.60	13.42	5.84	17.10	1.08	0.98	34.10	18.73	19.99	7000.0	2.90
5600.0	6.30	13.16	5.67	16.44	1.07	0.98	34.97	18.71	19.98		
5800.0	6.01	12.92	5.49	15.81	1.07	0.98	36.20	18.60	19.76		
6000.0	5.70	12.72	5.38	15.25	1.07	0.99	35.53	18.66	19.67		
6200.0	5.43	12.49	5.16	14.76	1.06	0.99	34.63	18.72	19.72		
6400.0	5.16	12.26	4.98	14.29	1.05	1.00	35.17	18.72	19.72		
6600.0	4.88	12.09	4.83	13.83	1.05	1.00	35.99	18.90	19.98		
6800.0	4.59	11.93	4.71	13.43	1.06	1.00	34.91	18.92	19.86		
7000.0	4.23	11.86	4.68	12.89	1.08	1.00	34.78	18.99	20.04		

(1) External Rbias resistor is adjusted to obtain desired current

(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

*Typical Performance Data***Definitions:**

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 3V, Id=60mA @ Temperature = +25degC (1)

FREQ (MHz)	Gain (dB)	Isolation (dB)	Input Return Loss (dB)	Output Return Loss (dB)	Stability		IP-3 Output (dBm)	1dB Comp. Output (2)		FREQ (MHz)	Noise Figure (dB)
								K	Measure		
50.0	25.84	31.27	10.85	12.05	1.07	0.73	32.14	18.44	18.48	50.0	1.00
100.0	25.71	30.72	11.23	17.28	1.07	0.76	32.28	18.25	18.27	100.0	0.74
300.0	24.61	29.59	9.57	24.26	1.05	0.81	32.83	18.33	18.34	400.0	0.61
500.0	23.07	28.57	8.18	25.73	1.05	0.88	33.45	18.45	18.46	600.0	0.66
600.0	22.26	27.93	7.68	25.65	1.04	0.91	33.88	18.50	18.53	800.0	0.70
800.0	20.71	26.75	7.02	25.09	1.05	0.95	34.54	18.39	18.57	1100.0	0.78
1000.0	19.31	25.74	6.60	24.22	1.06	0.98	35.20	18.37	18.61	1300.0	0.82
1200.0	18.05	24.75	6.33	23.42	1.07	1.00	35.99	18.42	18.80	1600.0	0.90
1400.0	16.93	23.83	6.14	22.81	1.08	1.01	35.87	18.42	18.98	1800.0	0.98
1600.0	15.94	22.95	6.02	22.28	1.09	1.02	36.19	18.33	18.72	2000.0	0.87
1700.0	15.48	22.49	5.96	22.13	1.09	1.02	36.22	18.45	18.89	2300.0	1.00
1900.0	14.64	21.71	5.93	21.75	1.09	1.02	36.25	18.37	18.87	2500.0	1.05
2100.0	13.89	20.96	5.92	21.70	1.09	1.02	36.63	18.30	19.09	2700.0	1.53
2300.0	13.21	20.25	5.95	21.89	1.09	1.02	37.19	18.33	19.16	3000.0	1.09
2500.0	12.59	19.59	6.06	22.21	1.09	1.01	36.86	18.32	19.19	3200.0	1.04
2700.0	11.72	19.29	5.91	21.38	1.12	1.05	37.28	18.32	19.23	3400.0	1.27
2900.0	11.47	18.41	6.09	21.68	1.09	1.00	37.35	18.22	19.25	3700.0	1.24
3000.0	11.24	18.09	6.18	21.87	1.09	1.00	37.53	18.27	19.23	3900.0	1.40
3200.0	10.79	17.55	6.32	22.20	1.09	0.99	37.73	18.33	19.33	4100.0	1.41
3400.0	10.36	17.02	6.47	22.45	1.09	0.98	37.66	18.40	19.24	4400.0	1.59
3600.0	9.97	16.52	6.60	22.51	1.09	0.97	37.54	18.46	19.40	4600.0	1.60
3800.0	9.57	16.05	6.73	22.42	1.09	0.96	37.76	18.42	19.35	4900.0	1.87
4000.0	9.18	15.63	6.81	21.98	1.09	0.95	38.42	18.48	19.46	5100.0	1.78
4100.0	8.99	15.43	6.83	21.57	1.09	0.95	37.91	18.56	19.34	5300.0	1.80
4300.0	8.59	15.09	6.79	20.39	1.09	0.95	38.32	18.55	19.27	5600.0	2.18
4500.0	8.25	14.73	6.76	19.41	1.10	0.94	37.97	18.67	19.25	5800.0	2.04
4700.0	7.89	14.41	6.84	18.54	1.11	0.93	39.10	18.72	19.54	6000.0	2.16
4900.0	7.34	14.25	7.09	17.53	1.15	0.93	38.58	18.78	19.60	6400.0	2.17
5100.0	7.24	13.71	6.32	17.38	1.08	0.93	39.00	18.95	19.77	6600.0	2.50
5300.0	6.97	13.41	6.09	16.76	1.07	0.94	38.70	18.80	19.82	6800.0	2.57
5400.0	6.82	13.28	6.00	16.43	1.07	0.94	39.49	18.73	19.99	7000.0	3.00
5600.0	6.53	13.01	5.83	15.79	1.07	0.94	39.05	18.71	19.98		
5800.0	6.23	12.77	5.64	15.20	1.06	0.94	37.76	18.60	19.76		
6000.0	5.92	12.56	5.52	14.69	1.06	0.94	38.39	18.66	19.67		
6200.0	5.65	12.33	5.30	14.20	1.05	0.95	39.65	18.72	19.72		
6400.0	5.38	12.11	5.12	13.77	1.05	0.95	38.93	18.72	19.72		
6600.0	5.10	11.94	4.96	13.33	1.05	0.95	38.41	18.90	19.98		
6800.0	4.80	11.81	4.84	12.93	1.05	0.96	38.83	18.92	19.86		
7000.0	4.44	11.73	4.81	12.40	1.07	0.96	40.47	18.99	20.04		

(1) External Rbias resistor is adjusted to obtain desired current


(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

MMIC Amplifier


PMA-5452+

Typical Performance Curves


GAIN vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1K Ohms

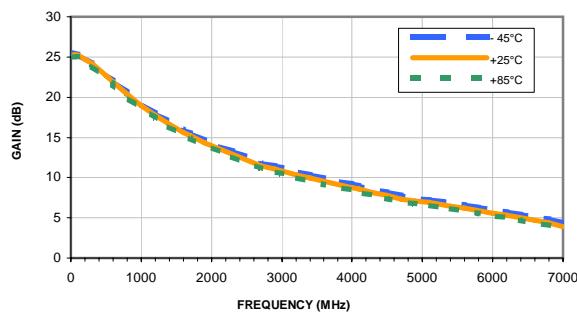


NOISE FIGURE vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1K Ohms

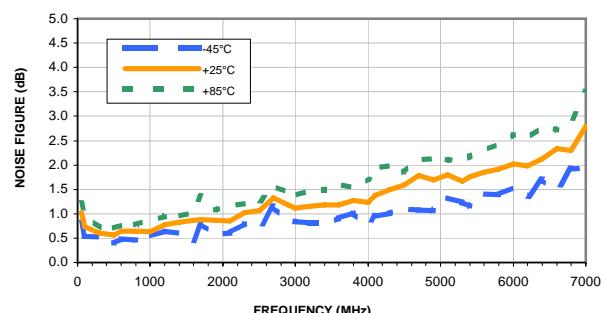


INPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1K Ohms

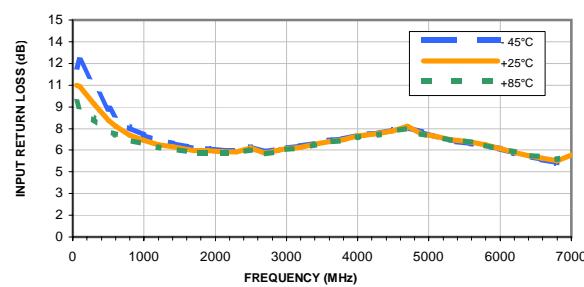


OUTPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1K Ohms

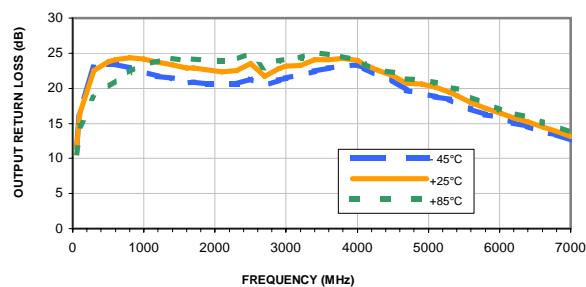

OUTPUT IP3 vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1K Ohms

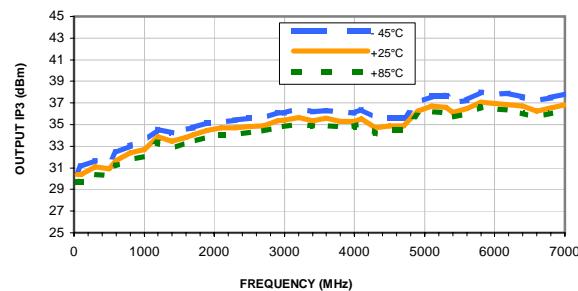







ISOLATION vs. FREQUENCY & TEMPERATURE
Vd = 3V, Rbias=1K Ohms

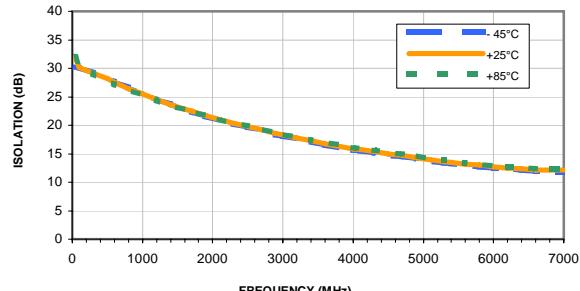

MMIC Amplifier

PMA-5452+

Typical Performance Curves

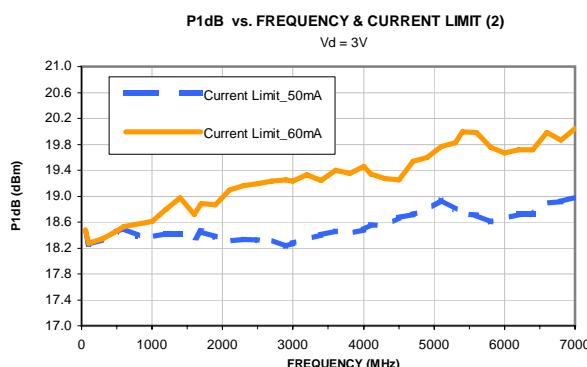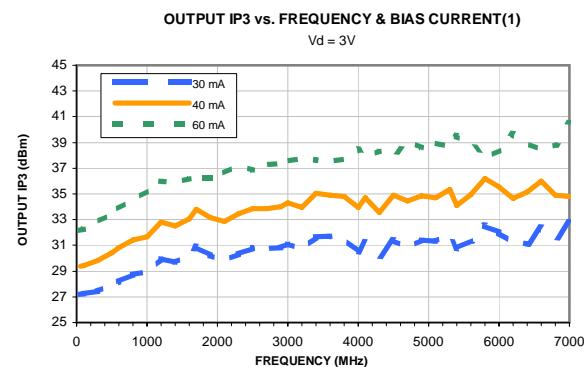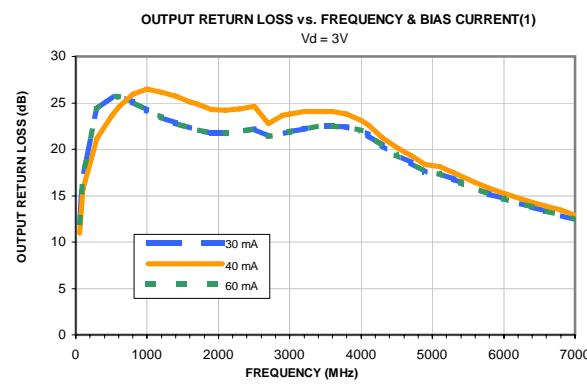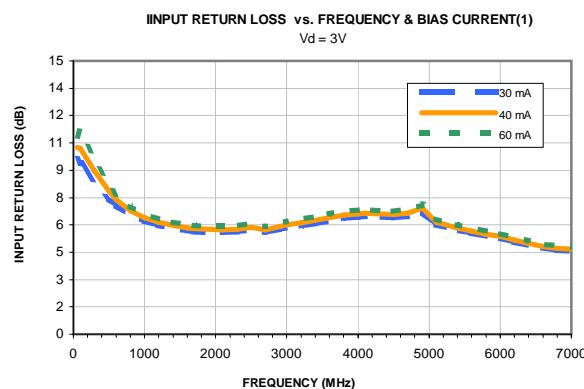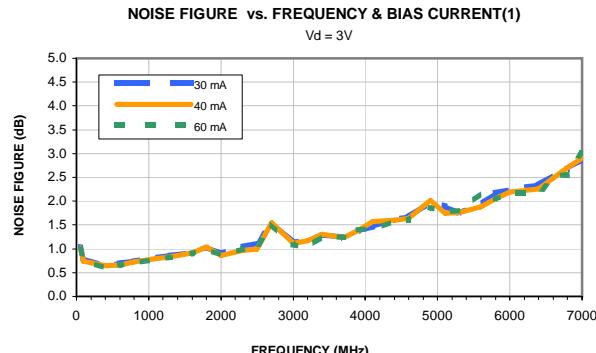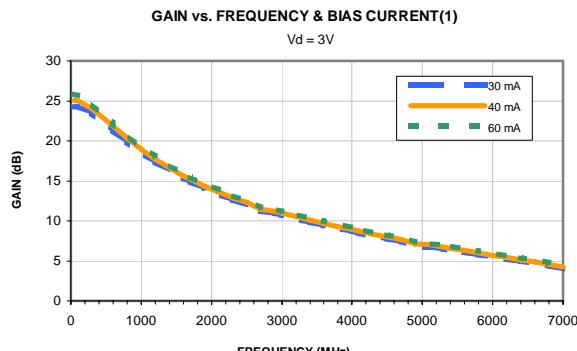

(1) External Rbias resistor is adjusted to obtain desired current


(2) Current is externally limited during P1dB measurements. Unit is capable of higher output power if current is not limited.

Case Style


DQ

DQ849

Outline Dimensions

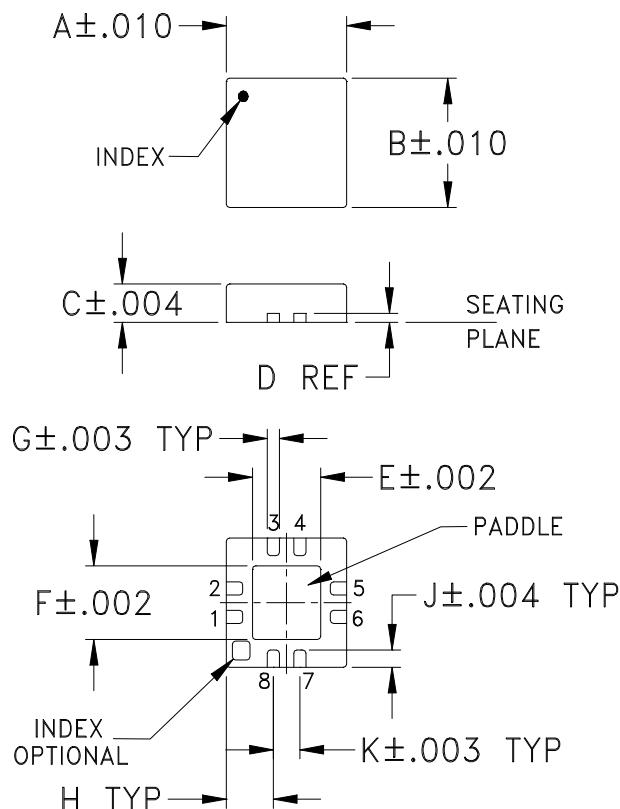

PCB Land Pattern

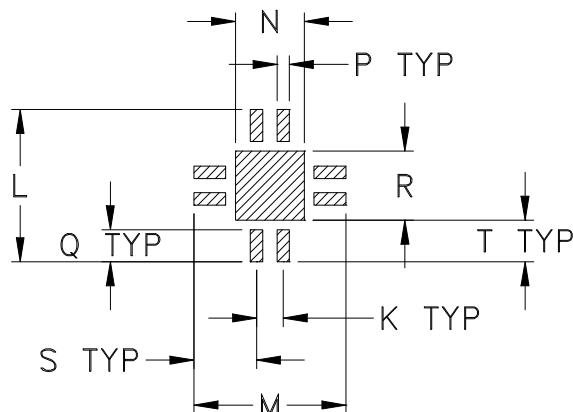

Suggested Layout,
Tolerance to be within ±.002

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N
DQ849	.118 (3.00)	.118 (3.00)	.035 (0.89)	.008 (0.20)	.067 (1.70)	.067 (1.70)	.012 (0.30)	.046 (1.17)	.016 (0.41)	.026 (0.66)	.148 (3.76)	.148 (3.76)	.067 (1.70)

CASE #	P	Q	R	S	T	WT. GRAM
DQ849	.012 (0.30)	.031 (0.79)	.067 (1.70)	.061 (1.55)	.041 (1.04)	.02

Dimensions are in inches (mm). Tolerances: 2Pl. ± .01; 3 Pl. ± .004

Notes:

1. Case material: Plastic.
2. Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin plated. All models, (+) suffix.
See Data sheet.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified

Tape & Reel Packaging TR-F104

DEVICE ORIENTATION IN T&R

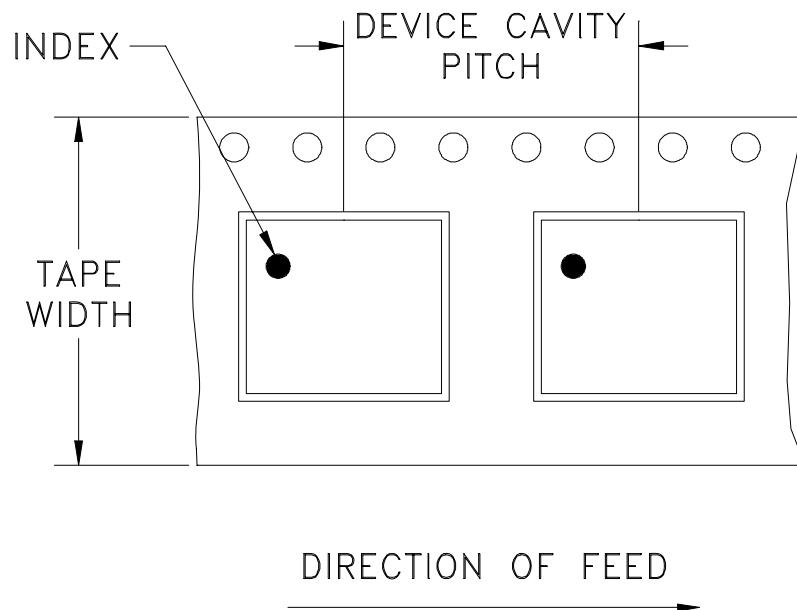

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
		7	Standard	2000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISI

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M121752	NEW RELEASE	03/05/09	PW	TH
A	M129864	ADDED DIMENSIONS	12/14/10	MMG	MM
B	M137913	REMOVED COMPONENT VALUES	07/10/12	GF	DJ

SUGGESTED MOUNTING CONFIGURATION FOR
DQ849 CASE STYLES
"08AM01" PIN CONNECTION

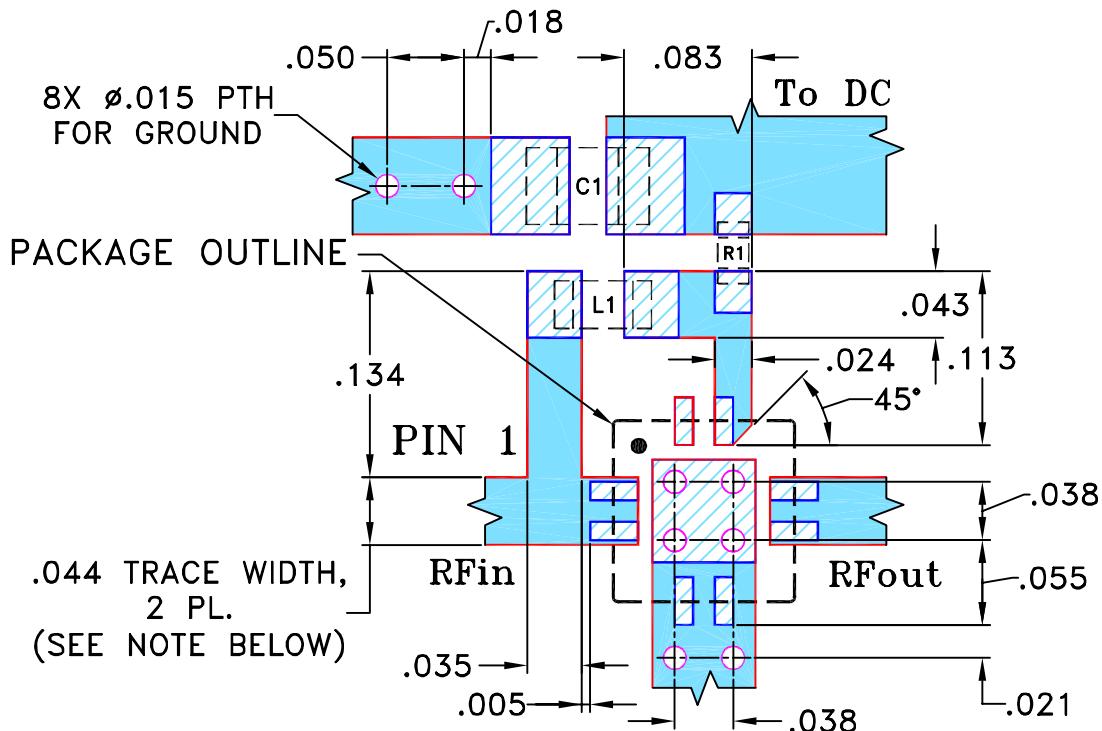

RESISTOR R1: 0402 SIZE

INDUCTOR L1: 0603 SIZE

CAPACITOR C1: 0805 SIZE

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.020" \pm .0015"$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. R1, L1 AND C1 FOOTPRINTS SHOWN FOR REFERENCE ONLY.
3. BOTTOM SIDE OF THE PCB IS CONTINOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

DRAWN PW

02/26/09

TOLERANCES ON:

CHECKED IL

03/04/09

2 PL DECIMALS $\pm .005$

APPROVED TH

03/05/09

3 PL DECIMALS $\pm .005$ ANGLES $\pm 1^\circ$ FRACTIONS \pm

MINI-CIRCUITS®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.



ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits®
13 Neptune Avenue
Brooklyn NY 11235

PL, 08AM01, DQ849, TB-501(-X)+

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-299	B
FILE:	98PL299	SCALE: 8:1	SHEET: 1 OF 1

Evaluation Board and Circuit

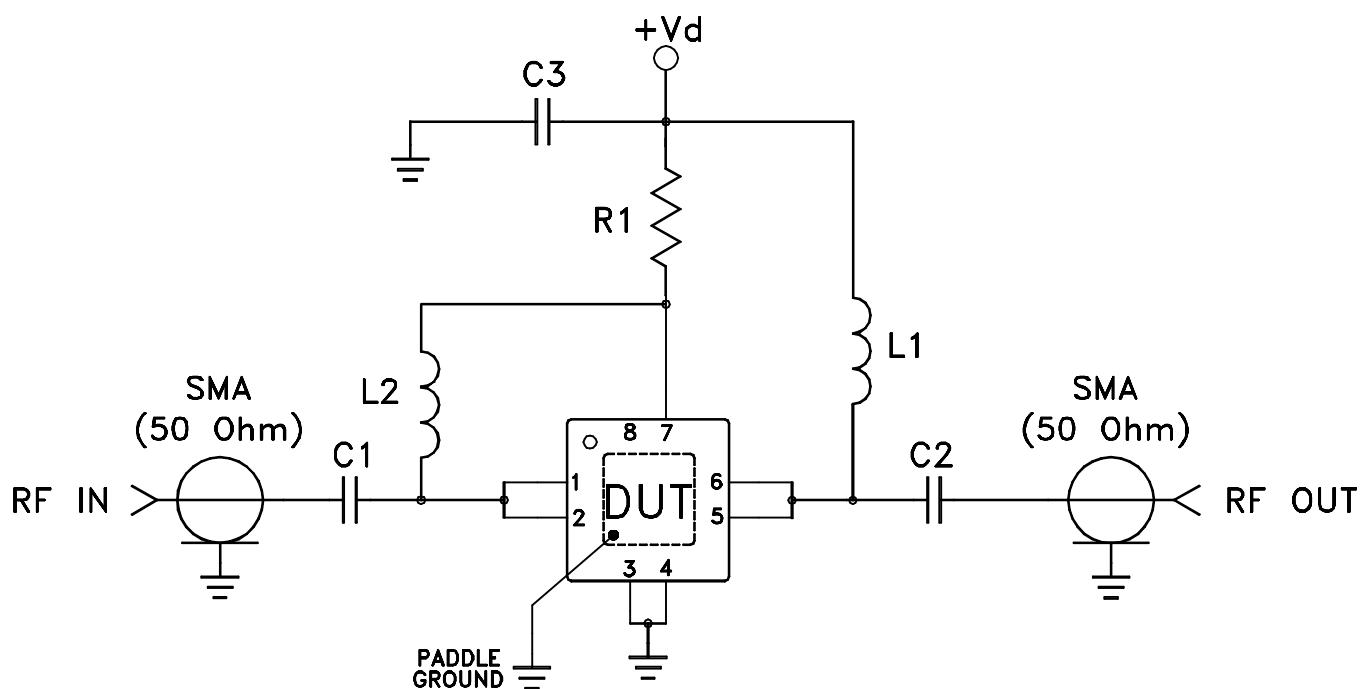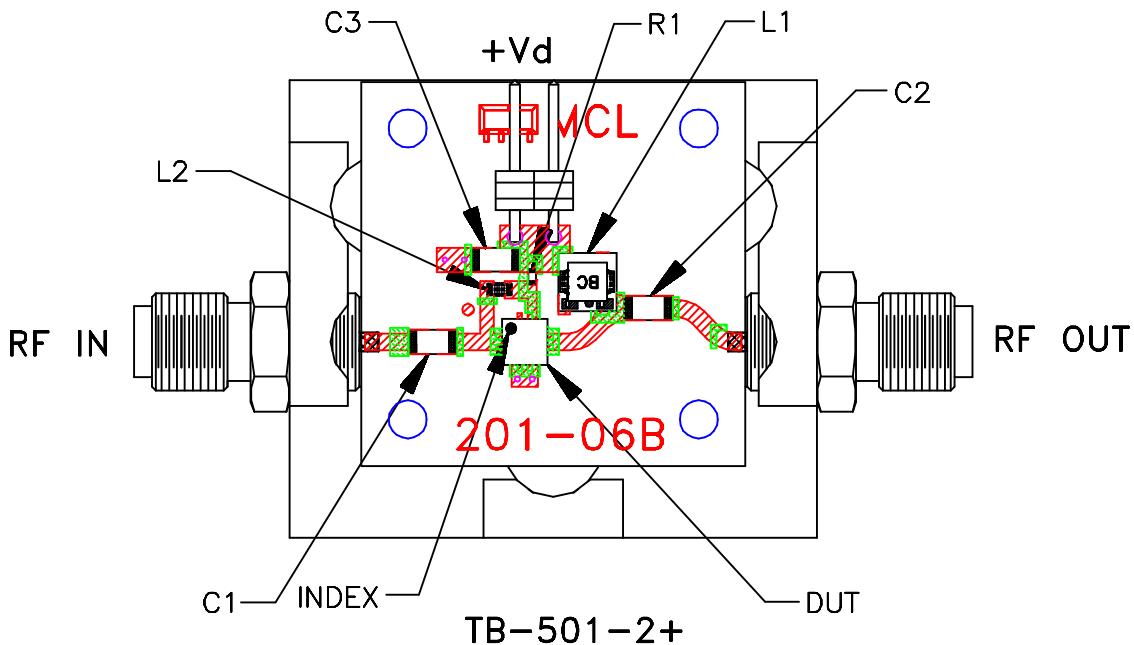

COMPONENT	VALUE/PART NUMBER
DUT	Mini-Circuits PMA-5452+
C1, C2, C3	0.1 uF
L1	Mini-Circuits TCCH-80+
L2	390 nH
R1	1k Ohm

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: RO4350 or equivalent,
Dielectric Constant=3.5, Thickness=.020 inch.

Schematic Diagram

Mini-Circuits®



Environmental Specifications

ENV08T1

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C or -45° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C or -65° to 150° Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Mechanical Shock	1.5Kg, 0.5 ms, 5 shock pulses, Y1 direction only	MIL-STD-883, Method 2002, Condition B, except Y1 direction only
Vibration (Variable Frequency)	50g peak	MIL-STD-883, Method 2007, Condition B
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102, Condition C
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	J-STD-020
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + propylene glycol monomethyl ether +	MIL-STD-202, Method 215



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
	monoethanolamine at 63°C to 70°C	