

Coaxial

Low Pass Filter

50Ω DC to 190 MHz

Maximum Ratings

Operating Temperature -55°C to +100°C

Storage Temperature -55°C to +100°C

RF Power Input 0.5 W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- Good Attenuation Rate, 1.35 Typ. 20 dB / 3 dB BW Ratio
- Rugged Shielded Case
- Other SLP Models Available with Wide Selection of Cut-Off Frequencies

Applications

- Lab Use
- Test Equipment
- Video Equipment

SLP-200+


Generic photo used for illustration purposes only


CASE STYLE: FF99

Connectors	Model
SMA	SLP-200+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

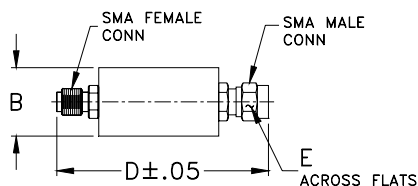


Outline Dimensions (inch/mm)

B	D	E	WT GRAMS
.70	1.98	.312	42.0
(17.78)	(50.29)	(7.92)	


Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-190	210	290-390	390-800	1.7	18

typical frequency response






electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ			
10.00	0.08	0.1	28.6	10.00	4.18
37.50	0.12	0.1	30.1	37.50	4.31
67.50	0.15	0.1	32.8	67.50	4.38
95.00	0.26	0.1	18.5	95.00	4.78
122.50	0.43	0.1	14.3	122.50	5.09
150.00	0.39	0.1	17.4	150.00	5.75
190.00	0.58	0.1	21.0	190.00	8.30
200.00	0.96	0.2	13.6	195.00	9.07
210.00	2.52	0.7	5.9	200.00	10.18
220.00	6.01	1.1	2.4	205.00	11.13
240.00	15.07	1.3	0.7	210.00	11.42
250.00	19.34	1.3	0.6	220.00	9.61
260.00	23.25	1.4	0.5	235.00	5.78
280.00	30.20	1.5	0.4	240.00	5.00
290.00	33.33	1.5	0.4	245.00	4.34
300.00	36.17	1.5	0.3	250.00	3.63
320.00	41.60	1.8	0.3	260.00	2.95
370.00	53.41	2.3	0.2	280.00	1.79
380.00	55.00	2.8	0.2	290.00	1.54
385.00	56.23	2.7	0.2	300.00	1.21
390.00	57.87	4.0	0.2	310.00	0.88
490.00	71.86	7.9	0.1	320.00	0.15
550.00	72.71	1.6	0.1	340.00	1.77
602.50	74.42	2.5	0.1	370.00	0.31
660.00	77.14	4.3	0.0	380.00	2.76
715.00	72.38	5.7	0.1	385.00	1.86
750.00	73.49	3.5	0.1	390.00	1.94
780.00	73.91	4.7	0.1	490.00	1.92
790.00	80.33	5.3	0.1	517.50	1.91
800.00	77.51	9.6	0.1	550.00	1.81

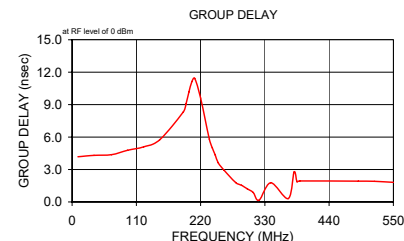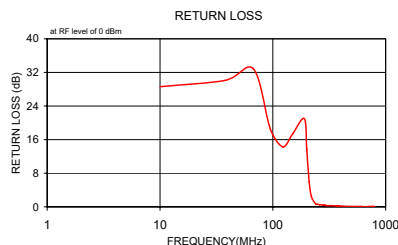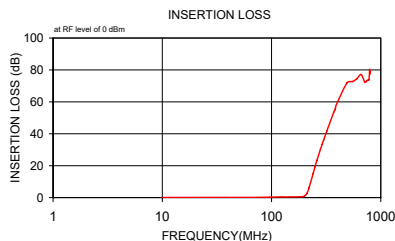

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp


www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. D
 ECO-024582
 SLP-200+
 MCL NY
 250502

Coaxial Low Pass Filter

SLP-200+

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	FREQUENCY (MHz)	GROUP DELAY (nsec)
10.0	0.05	39.91	10.0	3.770
20.0	0.06	36.77	20.0	4.040
30.0	0.08	36.66	30.0	4.050
40.0	0.09	39.53	40.0	4.080
50.0	0.11	40.05	50.0	4.110
60.0	0.12	32.16	60.0	4.160
70.0	0.14	26.63	70.0	4.210
80.0	0.17	22.86	80.0	4.260
90.0	0.21	20.22	90.0	4.320
100.0	0.25	18.43	100.0	4.370
110.0	0.28	17.38	110.0	4.460
120.0	0.30	17.05	120.0	4.560
130.0	0.30	17.56	130.0	4.720
140.0	0.29	19.24	140.0	4.900
150.0	0.28	22.95	150.0	5.140
160.0	0.28	30.78	160.0	5.420
170.0	0.32	26.56	170.0	5.720
180.0	0.38	21.34	180.0	6.060
190.0	0.43	20.90	190.0	6.590
200.0	0.46	32.56	200.0	7.600
210.0	0.70	15.63	210.0	9.300
220.0	1.93	6.56	220.0	10.510
230.0	4.89	2.63	230.0	9.110
240.0	8.93	1.18	240.0	6.620
250.0	13.10	0.67	250.0	4.800
260.0	17.04	0.48	260.0	3.670
300.0	30.21	0.30	300.0	1.850
310.0	33.01	0.28	310.0	1.580
320.0	35.66	0.27	320.0	1.500
330.0	38.20	0.26	330.0	1.570
340.0	40.61	0.25	340.0	1.220
500.0	70.68	0.17	500.0	3.680
2000.0	73.72	0.17	2000.0	0.700
2500.0	56.23	0.09	2500.0	0.260
3000.0	29.70	0.15	3000.0	1.280
3500.0	43.35	0.36	3500.0	0.230
4000.0	26.31	0.64	4000.0	1.030
4500.0	26.84	0.88	4500.0	1.810
5000.0	12.87	2.49	5000.0	0.780
5500.0	9.20	6.01	5500.0	2.480
6000.0	14.66	5.57	6000.0	1.260
6500.0	32.33	0.44	6500.0	0.310
7000.0	39.27	0.24	7000.0	0.390
8000.0	38.11	0.23	8000.0	1.090
9000.0	30.31	1.48	9000.0	1.390
10000.0	18.50	1.97	10000.0	1.820

REV. X1
SLP-200+
060929
Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Typical Performance Curves

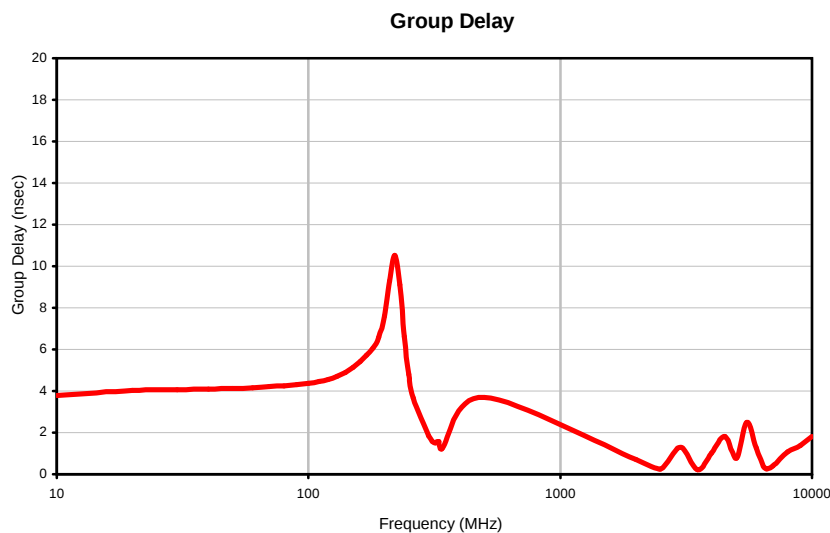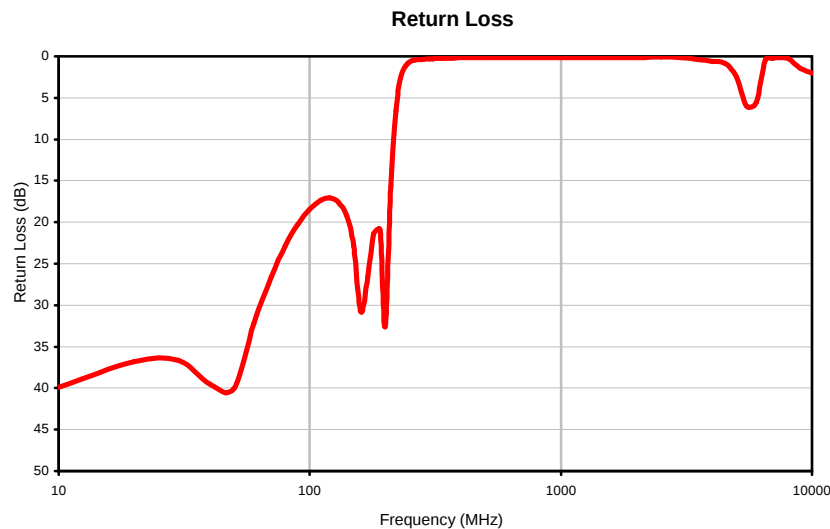

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



REV. X1
SLP-200+
060929
Page 1 of 1

FF56
FF99

Outline Dimensions

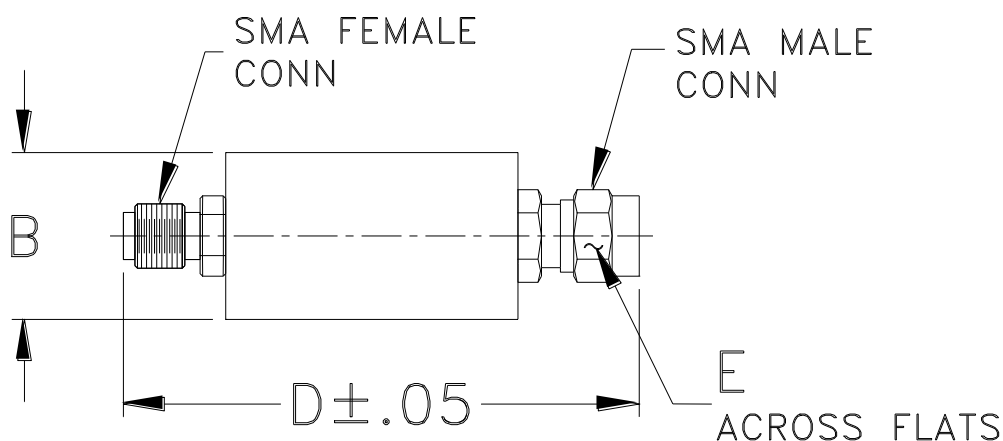

CASE #.	A	B	C	D	E	WT GRAMS
FF56	--	.46 (11.68)	--	1.70 (43.18)	.312 (7.92)	18.0
FF99	--	.70 (17.78)	--	1.98 (50.29)		42.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I