

Solid state


SPI RF SP10T Switch

SPI-SP10T-63

50Ω 1 to 6000 MHz

The Big Deal

- Daisy Chain SPI Control
- High Isolation (80 dB typ)
- High speed switching (6 μ s typ)
- High power handling (+27 dBm max)
- SMP snap-on RF connectors

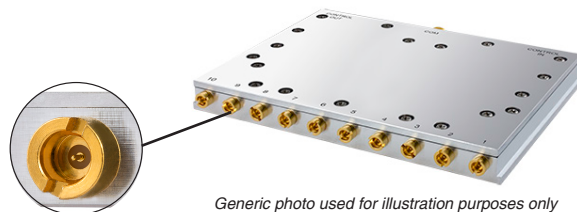

Generic photo used for illustration purposes only
Case Style: PM2137

Product Overview

Mini-Circuits' SPI-SP10T-63 is a low cost, high speed solid state RF SP10T absorptive switch, with control and power via a Digital Snap Fit connector. The model contains an electronic, high speed (6 μ s typ switching time), high linearity (IP3 50 dBm typ), SP10T switch. The RF switch is operated using a 3-wire SPI interface compatible with TTL and LVTTTL voltages and allows connecting up to 50 units in series to the same control line in a 'Daisy Chain' configuration. The RF switch operates over a wide frequency band from 1 to 6000 MHz with high isolation (80 dB typical) making the switch perfectly suitable for a wide variety of RF applications.

The SPI-SP10T-63 is constructed in a compact, rugged metal case (4.58" x 3.395" x 0.40") with 11 SMP(M) connectors (COM, and J1 to J10), and two Digital Snap-fit connectors providing a strong mechanical connection for SPI control and power, one for input and one for output when connecting multiple units in series.

Key Features

Feature	Advantages
Daisy chain SPI control	Allows connecting up to 50 units in series to a single power supply and 3 wire SPI control.
RF SP10T absorptive switch	Wideband (1 to 6000 MHz) with high isolation (80 dB typ.), and high power rating (+27 dBm through path).
High Linearity (IP3 +50 dBm typ.)	Results in little or negligible inter-modulation generation, meeting requirements for digital communications signals
Solid state switch	Provides high speed (6 μ s typ) switching with no wear on the switch as with electro-mechanical designs
DC Blocking	No need for external DC blocking circuitry
SMP connectors	Snap on RF connectors allow quick assembly and disassembly and the small size of SMP connectors makes tighter assemblies possible



Solid state

SPI RF SP10T Switch

SPI-SP10T-63

50Ω 1 to 6000 MHz

Features

- High speed switching (6 μ s typ)
- 1 to 6000 MHz SP10T absorptive RF switch
- High power handling, +27 dBm
- High linearity (IP3 +50 dBm)
- High isolation (80 dB typ)
- SPI control
- Daisy-chain up to 50 switches to control through a single interface (see pages 4-5)
- Easy installation and operation



Generic photo used for illustration purposes only

Case Style: PM2137


Applications

- R&D
- Automated Test equipment
- Controlling RF signal paths

RoHS Compliant

See our web site for RoHS Compliance methodologies and qualifications

Block Diagram

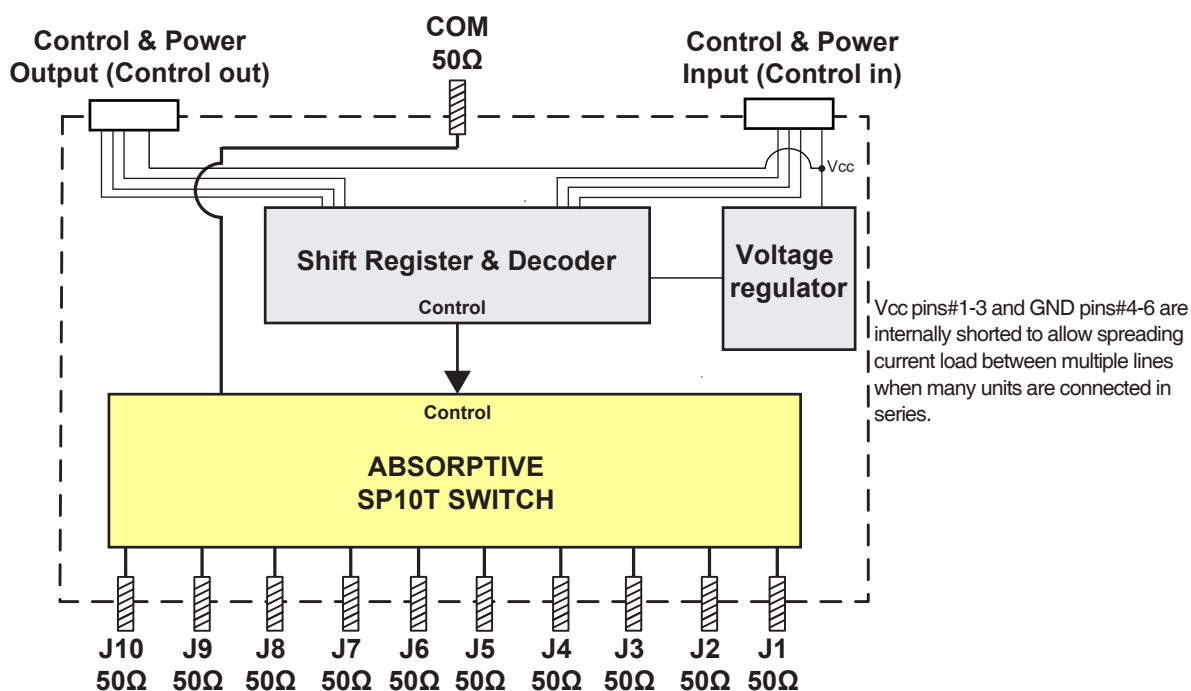

RF Electrical Specifications @ +25°C

Parameter	Port	Conditions	Min.	Typ.	Max.	Units
Operating Frequency			1		6000	MHz
Insertion Loss	COM to active ports 1-4 or 7-10	1 to 3000 MHz	–	3.2	5.0	dB
		3000 to 6000 MHz	–	4.7	6.5	
	COM to active port 5, or 6	1 to 3000 MHz	–	2.1	4.0	
		3000 to 6000 MHz	–	3.2	5.0	
Isolation	Between any two ports of J1 to J10	1 to 3000 MHz	70	95	–	dB
		3000 to 6000 MHz	65	90	–	
	COM to any terminated port	1 to 3000 MHz	65	90	–	
		3000 to 6000 MHz	60	85	–	
VSWR	COM port	1 to 3000 MHz	–	1.25	–	:1
		3000 to 6000 MHz	–	1.40	–	
	Any port connected to COM	1 to 3000 MHz	–	1.25	–	
		3000 to 6000 MHz	–	1.45	–	
	Any terminated port	1 to 3000 MHz	–	1.10	–	
		3000 to 6000 MHz	–	1.25	–	
Power Input @ 1 dB Compression ^{1,2}	COM to any active port	1 to 6000 MHz	30	–	–	dBm
IP3 ³	COM to any active port	10 to 6000 MHz	–	50	–	dBm
Switching time ⁴	–	1 to 6000 MHz	–	6	–	µs
Operating RF Input Power	COM to any active port	Hot Switching	–	–	+17	dBm
	Any terminated port	–	–	–	+17	
	COM to any active port	Through path ¹	–	–	+27	
Control	Control is via SPI in at Control In port. Control Out can be used to connect multiple units in a 'Daisy chain' without additional controls					

¹ Max operating power degrades linearly below 10 MHz to +22 dBm at 1 MHz.

² Note absolute maximum ratings in table below

³ Tested with 1 MHz span between signals, +5 dBm per tone.

⁴ Tested between Trigger and 90% RF signal at RF port

Connections

RF Switch (J1 to J10, COM)	(SMP male)
Power & Control in (Control in)*	(Hirose ST 10 pin Connector) ⁵
Power & Control out (Control out)**	(Hirose ST 10 pin Connector) ⁵

⁵ Mating connector is Hirose ST40X-10S-CV(30)

* Control in Pin Connections

Pin Number	Function
1 - 3	Vcc In
4 - 6	GND
7	Data In
8	Clock In
9	LE In
10	Lock in

** Control out Pin Connections

Pin Number	Function
1 - 3	Vcc out
4 - 6	GND
7	Data Out
8	Clock Out
9	LE Out
10	Lock Out

Absolute Maximum Ratings

Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 60°C
DC supply voltage max.	26V
Max supply current per pin	800 mA
RF power @ into inactive (internal termination) port	+20 dBm
RF power @ 1 -10 MHz into COM or active port	+25 dBm
RF power @ 10 -6000 MHz into COM or active port	+30 dBm
DC voltage @ RF Ports	16V

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

DC Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
Vcc, Supply Voltage	12	—	24	V
Load on Vcc between In and Out ports	—	0.05	—	Ω
Icc, Supply Current	@24V	—	30	mA
	@12V	—	50	
Control Input Low	-0.3	—	+0.6	V
Control Input High	2.0	—	5.5	V
Control Current	—	400	—	µA

Control Interface

The SPI-SP10T-63 serial interface consists of 4 control bits per unit that select the desired switch state, as shown in Table 1: Switch Logic Table.

Table 1: Switch Logic Table				
A0	A1	A2	A3	Switch State
1	0	1	0	Com<->J1
1	0	1	1	Com<->J2
1	0	0	1	Com<->J3
1	0	0	0	Com<->J4
1	1	N.C.	N.C.	Com<->J5
0	1	N.C.	N.C.	Com<->J6
0	0	1	0	Com<->J7
0	0	1	1	Com<->J8
0	0	0	1	Com<->J9
0	0	0	0	Com<->J10

The serial interface is a 4-bit serial in, parallel-out shift register buffered by a transparent latch. It is controlled by three-wire SPI protocol using Data, Clock, and Latch Enable (LE) and an additional Lock for added noise immunity and increased flexibility in controlling the units. All signal voltages are compatible with TTL and LVTTTL. The Data and Clock inputs allow data to be serially entered into the shift register, a process that is independent of the state of the LE input.

The LE input controls the latch. When LE is HIGH, the latch is transparent and the contents of the serial shift register control the switch. When LE is brought LOW, data in the shift register is latched.

Lock is used to lock the current state of the switch regardless of LE state or shift register, while allowing the LE to pass to other switches in the chain. If Lock is at logic HIGH the switch will respond to LE normally, when Lock is at logic LOW the switch will not respond to LE. If Lock is not required it can be kept constantly at logic high.

The shift register should be loaded while LE is held LOW to prevent the switch state from changing as data is entered. If multiple units are connected in series, data for all units should be entered before raising the LE to prevent switches assuming unanticipated states. Thus for example if three units are connected in daisy chain all 12 bits of control should be entered before raising the LE (see figures 2-4 for connecting units in daisy chain).

The LE input should then be toggled HIGH and brought LOW again, latching the new data. The timing for this operation is defined by Figure 1: Serial Interface Timing Diagram and Table 2: Serial Interface AC Characteristics.

Note:

1. LE is connected in parallel to all units in a daisy chain using the switches internal buffers to prevent control current from increasing as more units are connected.

Figure 1: Serial Interface Timing Diagram

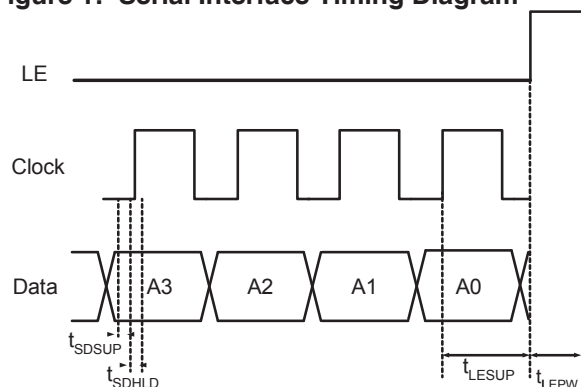


Table 2. Serial Interface AC Characteristics				
Symbol	Parameter	Min.	Max.	Units
f_{clk}	Serial data clock frequency		20	MHz
t_{clkH}	Serial clock HIGH time	8		ns
t_{clkL}	Serial clock LOW time	14		ns
t_{LESUP}	LE set-up time after last clock rising edge	8		ns
t_{LEPW}	LE minimum pulse width	8		ns
t_{SDSUP}	Serial data set-up time before clock rising edge	8		ns
t_{SDHLD}	Serial data hold time after clock falling edge	1		ns

Control Interface (Daisy Chain)

Figure 2: Connection diagram for multiple units in series

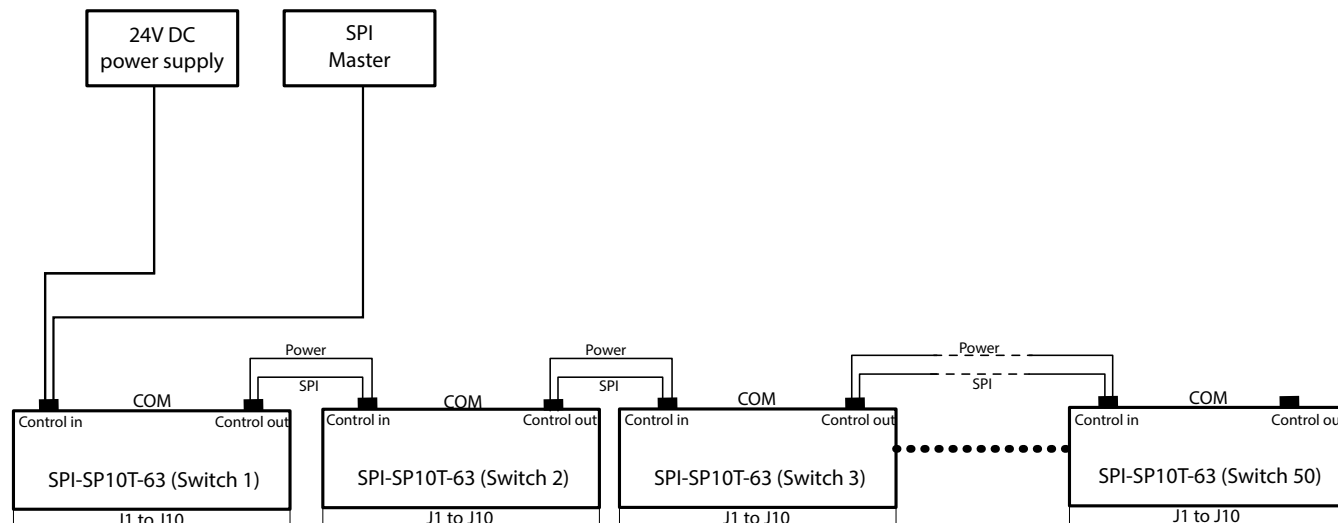


Figure 3: Serial Interface Timing Diagram for 3 units in series



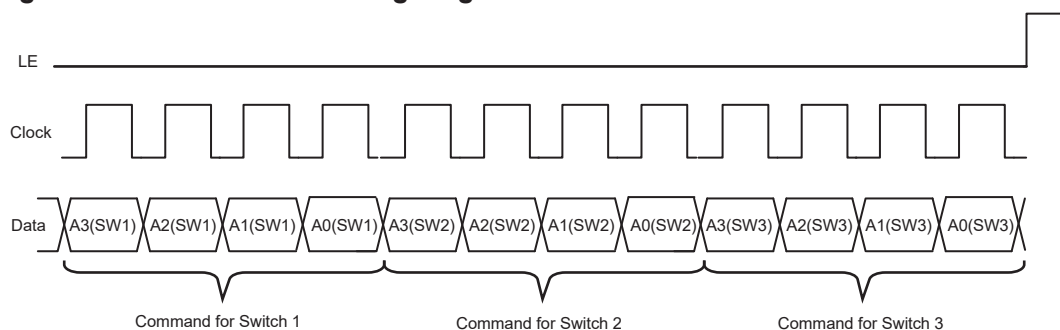


Figure 4: Example of command for 3 switches in series

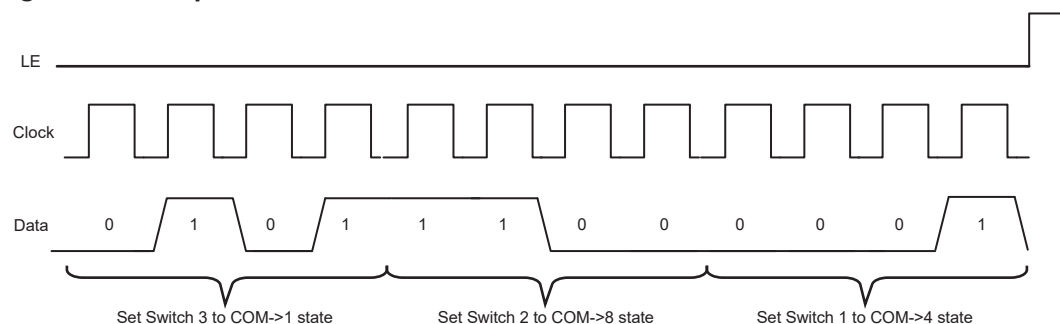


Typical Performance Curves


Insertion Loss over Temperature

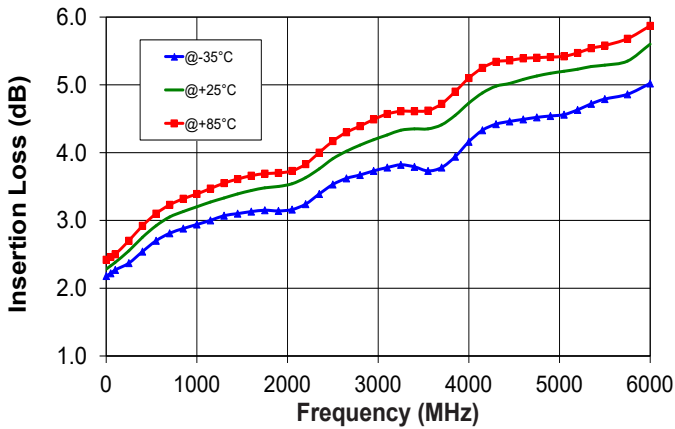


Insertion Loss at Ports J1-J10 vs. Frequency

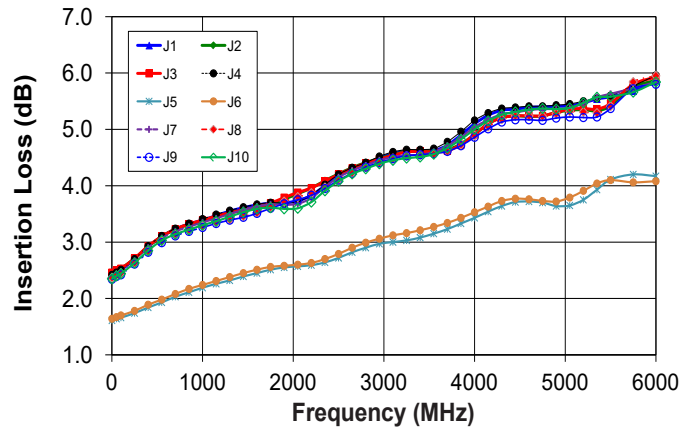


Active Port VSWR over Temp.

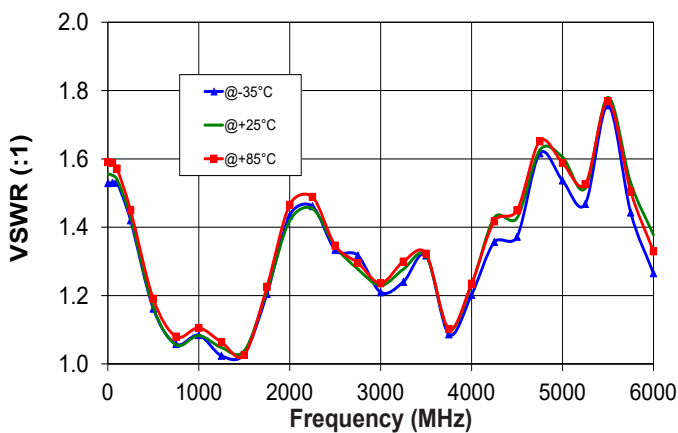

Common Port VSWR over Temp.

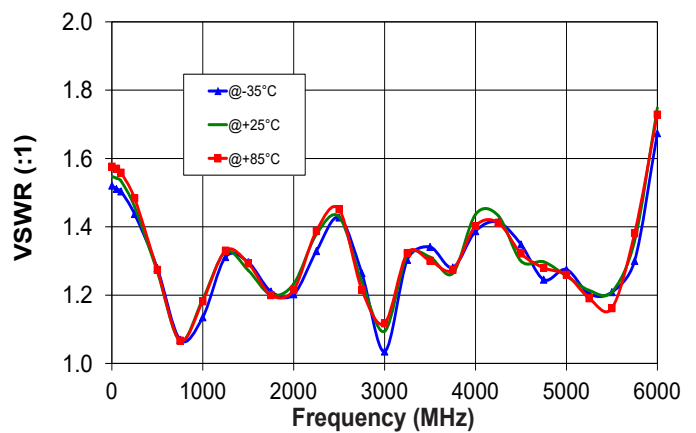


Internal Term. VSWR over Temp.

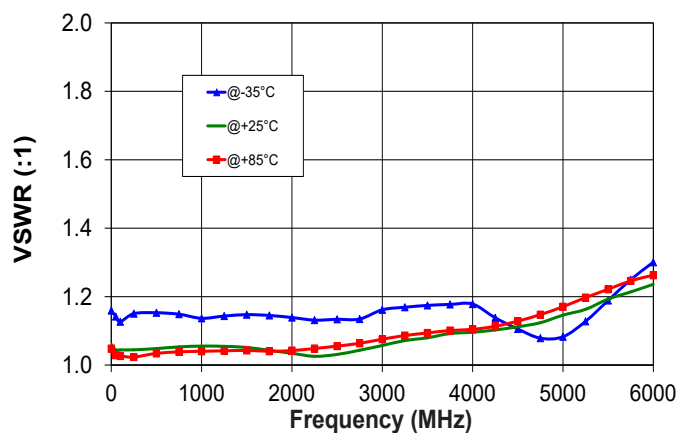


Typical Performance Curves (Continued)


Isolation Com to Port 1 with Over temp.

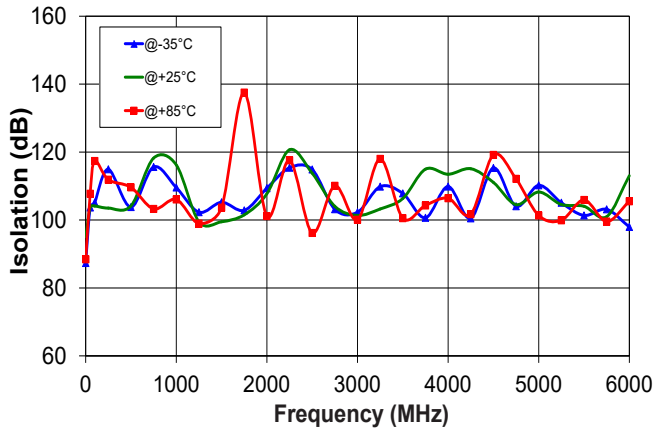


Isolation Com to Port J1-J10 vs. Frequency

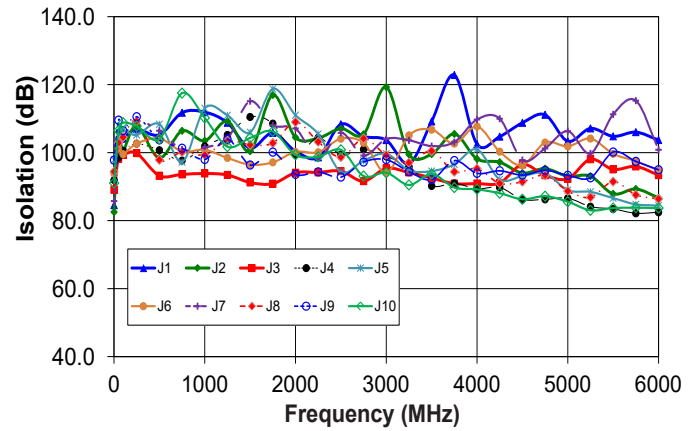


Isolation Port 2 to Port 1 Isolation over temp.

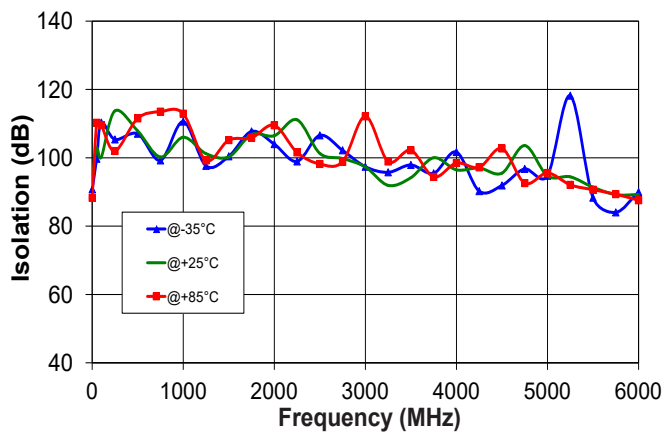


Isolation Port to Port vs. Frequency

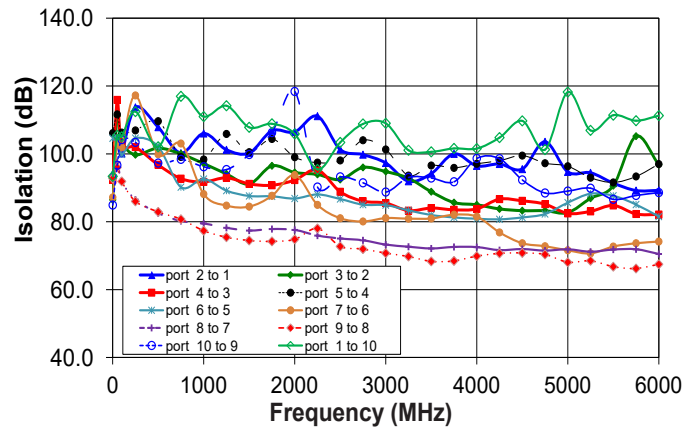

Input IP3

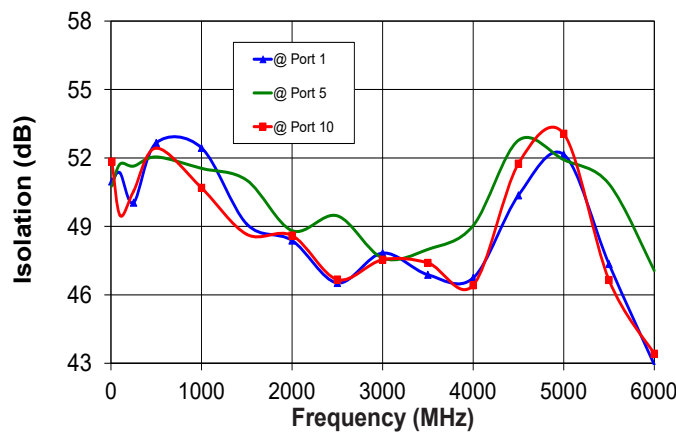

Outline Drawing (PM2137)

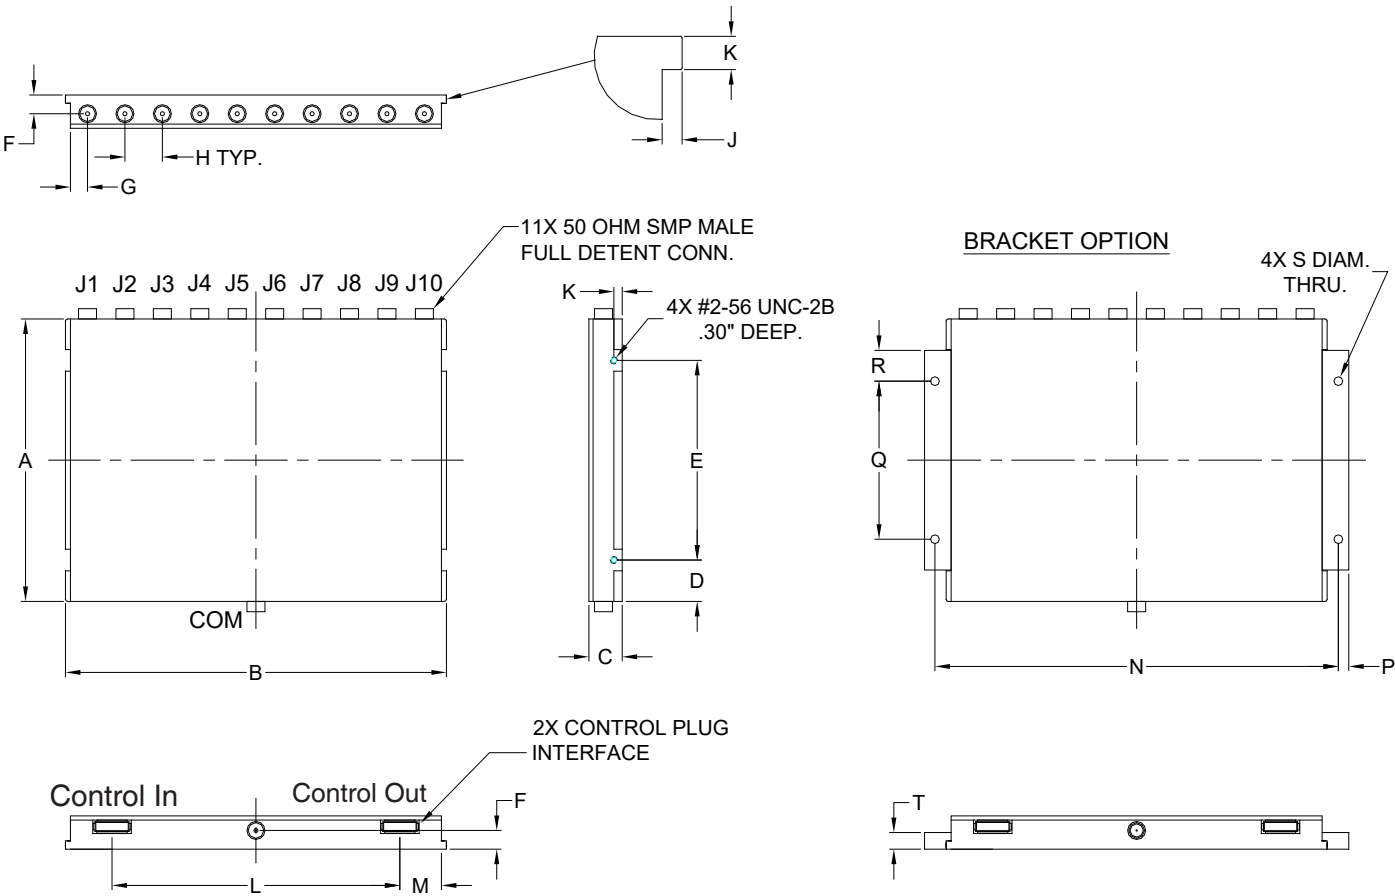

Outline Dimensions (^{inch}/_{mm})

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	WT. GRAMS
3.395 86.23	4.580 116.33	0.40 10.16	0.497 12.64	2.400 60.96	0.225 5.72	0.205 5.21	0.45 11.4	.060 1.52	0.100 2.54	3.460 87.88	0.500 12.70	4.850 123.19	0.125 3.18	1.900 48.26	0.370 9.40	0.106 2.69	0.200 5.08	200


Recommended Accessories

Several optional cable accessories with and without interface connector are available with the SPI-SP10T-63 in different lengths.

Cable P/N	Cable Length	Wire Gauge	Cable connectors	Recommended use
CBL-5FT-MMD+	5 ft (1.5 m)	32 AWG	Hirose ST40X-10S-CV(30) on each end	Connect between switches in series
CBL-1.5FT-MMD+	1.5 ft (0.46 m)	32 AWG	Hirose ST40X-10S-CV(30) on each end	Connect between switches in series
CBL-5FT-MPD+	5 ft (1.5 m)	32 AWG	Hirose ST40X-10S-CV(30) on one end, pigtail (bare wires) on the other	Connect SPI-SP10T-63 switch to customer control board and power

All cables are shielded and can handle the power draw of up to 50 switches in series.

CBL-5FT-MPD+ Control Cable

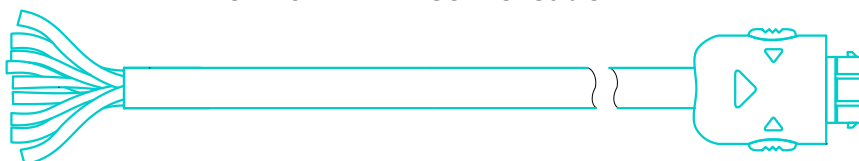

Pin Number	Function	Description	Pigtail Wire Color
1	Vcc	Supply Voltage	GREEN
2	Vcc	Supply Voltage	GREEN/BLACK
3	Vcc	Supply Voltage	RED
4	GND	Ground connection	ORANGE
5	GND	Ground connection	ORANGE/BLACK
6	GND	Ground connection	BLACK
7	Data	Data for SPI	RED/BLACK
8	Clock	Clock for SPI	BLUE
9	LE	Latch Enable for SPI	WHITE
10	Lock	Lock for SPI	WHITE/BLACK

CBL-5FT-MMD+ Control Cable



J1 Pin Number	J2 Pin Number	Function	Description
1	1	Vcc	Supply Voltage
2	2	Vcc	Supply Voltage
3	3	Vcc	Supply Voltage
4	4	GND	Ground connection
5	5	GND	Ground connection
6	6	GND	Ground connection
7	7	Data	Data for SPI
8	8	Clock	Clock for SPI
9	9	LE	Latch Enable for SPI
10	10	Lock	Lock for SPI

Ordering, Pricing & Availability Information see our web site

Model	Description
SPI-SP10T-63	SPI RF SP10T Switch

Optional Accessories	Description
CBL-5FT-MMD+	5 ft. Digital Snap Fit(male-male) cable assembly(SPI)
CBL-5FT-MPD+	5 ft. Digital Snap Fit(male-pigtail) cable assembly(SPI)
CBL-1.5FT-MMD+	1.5 ft. Digital Snap Fit(male-male) cable assembly(SPI)

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Solid State SPI RF SP10T Switch

SPI-SP10T-63

Typical Performance Data

TEST CONDITIONS: @Temperature = +25°C, Power in=0 dBm

FREQUENCY (MHz)	INSERTION LOSS									
	(dB)									
	COM-J1	COM-J2	COM-J3	COM-J4	COM-J5	COM-J6	COM-J7	COM-J8	COM-J9	COM-J10
1	2.42	2.45	2.46	2.42	1.61	1.64	2.38	2.37	2.34	2.35
5	2.42	2.46	2.46	2.43	1.61	1.65	2.39	2.38	2.35	2.36
10	2.43	2.46	2.47	2.43	1.61	1.65	2.39	2.38	2.35	2.36
40	2.45	2.48	2.49	2.46	1.63	1.67	2.42	2.41	2.38	2.39
50	2.46	2.49	2.50	2.46	1.64	1.67	2.43	2.41	2.39	2.40
60	2.47	2.50	2.51	2.47	1.64	1.68	2.43	2.42	2.39	2.40
70	2.48	2.51	2.51	2.48	1.65	1.68	2.44	2.43	2.40	2.41
80	2.49	2.51	2.52	2.49	1.65	1.69	2.45	2.44	2.41	2.42
90	2.50	2.52	2.53	2.50	1.66	1.69	2.46	2.44	2.42	2.43
100	2.50	2.53	2.53	2.51	1.66	1.70	2.47	2.45	2.42	2.44
200	2.62	2.64	2.64	2.62	1.71	1.74	2.59	2.56	2.53	2.56
300	2.78	2.78	2.79	2.79	1.78	1.82	2.75	2.71	2.68	2.71
400	2.92	2.92	2.93	2.93	1.84	1.89	2.90	2.84	2.82	2.85
500	3.04	3.04	3.05	3.06	1.90	1.95	3.02	2.96	2.94	2.97
600	3.15	3.15	3.15	3.16	1.96	2.01	3.12	3.07	3.04	3.07
700	3.23	3.23	3.23	3.24	2.03	2.08	3.19	3.14	3.11	3.14
800	3.29	3.29	3.29	3.30	2.09	2.14	3.25	3.20	3.17	3.20
900	3.34	3.34	3.34	3.35	2.14	2.19	3.30	3.24	3.22	3.25
1000	3.39	3.38	3.39	3.41	2.19	2.24	3.35	3.28	3.26	3.30
1100	3.45	3.43	3.43	3.46	2.24	2.29	3.40	3.33	3.30	3.35
1200	3.50	3.48	3.48	3.52	2.28	2.34	3.45	3.37	3.35	3.40
1300	3.55	3.52	3.52	3.56	2.32	2.38	3.50	3.40	3.39	3.45
1400	3.59	3.55	3.55	3.61	2.36	2.43	3.55	3.44	3.43	3.50
1500	3.63	3.57	3.58	3.64	2.41	2.47	3.59	3.47	3.46	3.55
1600	3.66	3.60	3.62	3.67	2.45	2.51	3.63	3.52	3.51	3.59
1700	3.68	3.64	3.66	3.69	2.49	2.55	3.66	3.59	3.57	3.61
1800	3.69	3.69	3.72	3.70	2.52	2.57	3.67	3.66	3.62	3.61
1900	3.70	3.76	3.79	3.69	2.55	2.58	3.66	3.72	3.68	3.59
2000	3.71	3.82	3.85	3.70	2.56	2.60	3.66	3.78	3.72	3.59
2200	3.83	3.96	3.96	3.83	2.59	2.63	3.78	3.87	3.83	3.71
2400	4.06	4.13	4.11	4.08	2.66	2.72	4.04	4.02	4.00	3.97
2600	4.26	4.29	4.28	4.28	2.79	2.86	4.24	4.20	4.19	4.17
2800	4.39	4.41	4.40	4.41	2.90	2.99	4.36	4.33	4.33	4.30
3000	4.51	4.51	4.50	4.54	2.98	3.08	4.47	4.43	4.43	4.41
3200	4.60	4.59	4.58	4.63	3.02	3.15	4.53	4.52	4.52	4.48
3400	4.61	4.62	4.61	4.64	3.08	3.21	4.55	4.55	4.55	4.51
3600	4.65	4.62	4.60	4.69	3.17	3.29	4.63	4.57	4.58	4.59
3800	4.83	4.70	4.68	4.90	3.30	3.40	4.81	4.68	4.67	4.77
4000	5.10	4.91	4.91	5.16	3.43	3.53	5.04	4.89	4.86	5.00
4200	5.30	5.15	5.15	5.33	3.57	3.67	5.21	5.11	5.06	5.20
4400	5.37	5.24	5.24	5.39	3.69	3.76	5.30	5.23	5.17	5.30
4600	5.39	5.23	5.24	5.41	3.72	3.76	5.34	5.24	5.17	5.35
4800	5.41	5.25	5.26	5.42	3.67	3.71	5.36	5.24	5.17	5.37
5000	5.41	5.34	5.34	5.44	3.63	3.75	5.36	5.32	5.22	5.37
5200	5.47	5.35	5.37	5.50	3.75	3.91	5.46	5.31	5.21	5.47
5400	5.56	5.35	5.38	5.57	3.99	4.06	5.60	5.31	5.26	5.58
5600	5.60	5.55	5.59	5.65	4.18	4.09	5.66	5.59	5.53	5.58
5800	5.72	5.80	5.85	5.82	4.19	4.05	5.75	5.90	5.76	5.70
6000	5.87	5.87	5.93	5.96	4.17	4.08	5.84	5.95	5.80	5.84
6200	5.82	5.84	5.93	5.89	4.29	4.17	5.79	6.01	5.84	5.80
6500	5.92	5.95	6.04	6.02	4.52	4.11	6.06	6.20	5.89	6.10
7000	6.30	6.28	6.40	6.39	4.12	4.05	6.19	6.49	6.23	6.17
7500	6.66	6.35	6.37	6.70	4.61	4.37	6.78	6.43	6.33	6.69
8000	6.45	6.31	6.29	6.55	4.38	4.22	6.54	6.42	6.38	6.49

Notes:

- Information and quality standards of our products are continuously improved. In this respect, the information provided by us is subject to change without notice and is subject to the applicable documents.
- Each of our products and performance data are verified in a test environment based on standard test conditions. Actual performance may vary due to manufacturing tolerances.
- Information provided by third parties and documents is subject to change. We do not assume any liability for errors and omissions. We warrant only the performance of our products.

The highest performance is achieved when using the SPI-SP10T-63 with the Mini-Circuits SMA connectors. Please refer to the Mini-Circuits website for more information.



www.minicircuits.com 1-800-368-0800 (toll-free) or 631-661-1600 (NY) Fax: 631-661-1601

REV. OR
SPI-SP10T-63
160927
Page 1 of 4

Solid State SPI RF SP10T Switch

SPI-SP10T-63

Typical Performance Data

TEST CONDITIONS: @Temperature = +25°C, Power in=0 dBm

FREQUENCY (MHz)	Isolation (COM to terminated port)									
	(dB)									
	COM-J1	COM-J2	COM-J3	COM-J4	COM-J5	COM-J6	COM-J7	COM-J8	COM-J9	COM-J10
1	84.55	82.52	89.13	91.92	97.82	93.81	85.75	94.40	97.79	91.04
5	92.89	88.95	95.80	108.60	86.48	100.02	87.72	93.65	104.56	91.58
10	115.16	98.47	103.44	103.84	111.02	100.37	103.79	107.92	100.33	100.16
40	101.84	101.24	100.93	103.47	107.61	104.39	101.51	114.11	102.33	102.48
50	102.98	106.08	98.22	98.51	105.00	101.21	103.37	102.89	109.54	106.51
60	104.13	109.02	96.85	105.16	106.97	104.84	110.05	102.95	103.36	104.91
70	104.75	99.42	94.88	99.27	110.30	97.55	110.23	98.93	101.85	102.33
80	113.21	112.22	94.49	100.83	98.28	100.70	108.75	102.15	101.89	115.90
90	104.30	105.24	96.06	97.36	105.32	100.99	116.80	118.94	101.80	99.61
100	104.10	100.62	99.31	100.54	106.69	99.55	104.49	104.54	106.49	108.81
200	105.35	110.13	97.46	99.94	111.93	101.83	110.63	104.13	100.59	102.49
300	119.29	115.44	95.29	95.30	98.32	99.42	107.43	113.96	105.72	112.33
400	101.47	106.96	92.17	99.62	107.38	98.56	105.35	109.81	101.54	104.10
500	105.21	98.43	93.22	100.70	108.34	104.19	106.43	97.86	103.75	103.97
600	117.90	102.15	96.86	103.81	110.32	100.66	102.23	94.12	98.81	106.67
700	113.79	115.51	93.71	100.26	101.50	96.45	117.75	98.70	95.09	102.32
800	99.58	102.67	91.49	99.27	108.51	101.55	97.61	101.25	95.79	113.36
900	104.43	103.11	92.65	105.11	104.46	102.90	110.66	109.10	96.10	99.97
1000	111.91	103.47	93.86	101.84	113.04	100.82	101.52	99.33	97.99	110.22
1100	98.82	107.21	92.84	99.97	107.73	97.81	105.04	108.00	105.62	104.18
1200	99.73	100.66	94.44	100.68	103.67	98.87	112.61	102.56	99.37	109.50
1300	104.58	97.50	92.54	103.69	103.86	98.97	102.08	103.79	95.82	100.47
1400	107.07	112.46	92.61	94.82	110.44	101.63	112.33	106.42	96.47	118.75
1500	101.30	100.40	91.22	110.48	105.98	96.45	115.12	102.27	96.34	104.31
1600	107.28	100.92	92.48	99.66	108.20	95.58	102.50	114.21	92.70	109.22
1700	107.99	100.07	91.08	100.91	103.10	93.34	119.35	104.24	103.45	104.10
1800	105.56	102.35	91.99	96.69	98.43	97.05	98.06	107.65	95.73	103.37
1900	104.57	97.73	90.76	99.46	107.50	103.04	114.08	98.34	96.95	109.88
2000	100.42	104.47	94.08	99.36	111.00	100.21	107.10	108.98	93.61	99.34
2200	109.01	108.03	93.26	99.64	101.29	99.32	104.70	95.90	94.69	94.54
2400	105.44	113.47	89.11	98.13	107.31	109.97	102.58	97.05	95.36	105.02
2600	104.30	106.76	90.80	114.17	105.61	100.85	102.09	100.77	93.75	102.24
2800	104.26	97.87	92.41	94.65	101.33	106.57	106.24	106.90	95.97	96.06
3000	103.69	119.28	95.36	98.87	99.65	94.02	104.00	99.26	97.94	94.09
3200	120.92	102.33	91.91	96.26	100.79	96.58	101.88	112.22	93.59	92.00
3400	108.54	106.39	91.24	94.32	95.39	101.53	104.58	96.31	91.84	93.00
3600	106.65	105.00	91.67	93.55	99.57	108.06	100.16	97.19	95.17	90.10
3800	109.30	98.71	93.04	97.30	90.11	112.54	98.49	93.24	93.97	88.25
4000	102.48	98.15	90.89	89.36	100.96	107.69	109.74	95.27	93.92	89.20
4200	106.44	107.12	92.08	91.07	101.93	109.56	101.04	91.74	96.76	87.87
4400	101.11	101.50	96.10	88.02	93.11	99.96	108.81	95.64	94.93	87.74
4600	108.82	92.41	93.88	88.56	93.59	101.78	98.72	92.43	94.30	87.40
4800	105.46	95.20	97.72	87.15	89.03	97.05	105.53	89.14	95.74	85.76
5000	103.33	93.06	92.31	86.59	88.94	101.84	106.30	88.71	93.31	85.55
5200	96.04	92.87	92.59	85.29	90.72	97.71	98.12	89.75	105.63	85.08
5400	106.80	90.85	94.94	84.26	85.98	98.46	109.42	89.64	94.26	83.94
5600	97.71	89.81	92.55	83.45	86.41	100.56	100.26	86.85	98.13	83.07
5800	116.48	88.28	93.16	82.38	85.14	96.42	100.45	87.80	96.56	83.83
6000	103.71	86.72	93.38	82.44	84.41	94.69	100.83	86.37	94.96	83.70
6200	98.25	85.85	95.86	82.16	84.56	90.28	103.53	86.63	95.22	82.76
6500	113.29	84.01	88.92	80.36	84.36	90.34	103.17	86.32	91.88	81.77
7000	99.48	81.52	85.34	77.40	79.88	88.96	95.34	83.69	89.46	79.42
7500	106.12	78.46	81.75	74.41	77.09	84.69	94.20	81.17	86.89	75.83
8000	94.87	74.88	80.17	70.84	71.78	83.43	90.56	75.88	80.98	72.77

Notes:

- Performance and quality characteristics will vary with operating conditions. This data is for reference only and is not intended to be used for design purposes.
- Actual operating conditions and performance may vary with operating conditions. This data is for reference only and is not intended to be used for design purposes.
- Isolation is measured by the ratio of the input power to the output power. The input power is measured at the input of the device and the output power is measured at the output of the device. The input power is measured at the input of the device and the output power is measured at the output of the device.



SPI-SP10T-63

TEST CONDITIONS: @Temperature = +25°C, Power in=0 dBm

FREQUENCY (MHz)	Isolation (port to port)									
	(dB)									
	J1-J2	J2-J3	J3-J4	J4-J5	J5-J6	J6-J7	J7-J8	J8-J9	J9-J10	J1-J10
1	94.14	86.46	92.36	106.11	104.59	87.18	93.61	92.75	84.92	93.37
5	97.62	82.88	86.89	91.33	87.40	93.03	88.53	97.45	83.80	93.71
10	113.34	105.15	110.26	105.09	111.48	102.11	102.80	119.73	105.74	103.49
40	113.18	105.61	104.75	128.98	114.34	99.64	92.55	95.47	109.26	105.82
50	102.88	111.17	115.90	111.64	104.83	102.90	97.55	96.00	96.65	105.43
60	99.55	106.73	108.33	103.48	107.51	101.83	95.63	93.80	107.11	100.98
70	99.98	100.69	109.35	105.76	107.32	102.72	94.80	91.92	106.25	108.78
80	103.97	110.37	106.97	104.35	102.67	109.48	94.41	91.96	107.55	104.50
90	108.09	102.30	107.32	118.45	105.36	110.98	93.96	92.32	107.28	110.29
100	100.12	103.59	102.59	106.27	99.84	101.92	91.94	91.88	104.21	105.04
200	110.11	105.67	98.94	104.97	107.21	112.02	89.03	89.75	101.28	104.73
300	108.28	105.24	98.74	104.17	103.79	97.65	86.48	86.53	110.74	106.05
400	111.12	98.26	98.68	124.18	96.17	103.75	83.87	84.18	96.45	102.25
500	107.86	101.70	96.79	109.63	102.14	99.88	82.54	82.90	97.29	102.09
600	107.04	100.35	96.11	98.70	92.30	96.17	80.66	80.16	97.66	103.84
700	101.76	110.76	95.70	100.43	94.60	96.54	81.73	79.64	104.83	114.20
800	104.08	98.96	95.78	102.45	92.12	87.46	81.14	82.41	111.37	103.15
900	101.86	96.18	94.51	118.98	91.60	93.83	79.67	79.99	105.73	100.97
1000	106.00	97.16	91.73	98.35	92.57	88.15	79.48	77.34	96.20	110.98
1100	103.29	97.82	91.51	97.93	93.63	87.10	79.16	76.60	99.39	107.77
1200	101.24	97.23	89.84	103.34	96.48	83.17	78.58	77.13	98.64	104.01
1300	100.33	94.27	96.41	101.84	90.06	88.73	77.42	75.88	108.80	105.78
1400	106.75	92.36	93.43	99.63	88.30	89.55	77.66	74.99	99.03	102.26
1500	100.25	91.12	91.16	100.50	87.59	84.46	77.39	74.47	99.81	107.82
1600	110.75	92.38	93.21	97.20	87.22	86.95	76.84	73.96	98.45	111.64
1700	107.64	98.97	94.24	112.88	90.13	86.70	77.56	73.78	102.30	104.02
1800	104.24	91.69	91.83	106.76	89.57	88.32	77.19	73.80	101.07	105.09
1900	106.45	92.03	91.68	104.20	90.01	91.19	77.27	74.05	100.19	106.69
2000	106.45	94.52	92.28	99.01	86.84	93.76	77.58	74.80	118.39	105.88
2200	104.22	91.92	93.60	98.15	89.96	85.36	76.89	78.88	97.76	111.04
2400	103.71	93.63	91.07	103.43	89.06	80.52	75.57	74.08	93.86	120.11
2600	98.17	98.33	85.43	103.16	86.95	80.31	74.94	72.10	88.79	105.57
2800	99.86	92.07	85.06	100.10	87.26	79.45	73.93	71.78	90.27	99.42
3000	97.31	94.79	85.51	101.30	84.89	81.07	73.25	70.73	88.75	109.00
3200	97.92	94.02	85.32	114.19	82.67	81.28	72.69	69.91	91.23	103.70
3400	95.64	89.71	85.24	96.84	83.05	83.12	71.99	68.85	91.29	109.28
3600	95.37	86.65	85.95	93.10	81.33	81.55	72.32	68.32	94.81	106.73
3800	93.51	85.02	84.86	98.47	80.90	82.38	72.81	68.53	97.98	113.81
4000	96.46	85.00	83.77	97.08	80.89	81.51	72.51	69.86	98.66	101.56
4200	94.67	83.60	85.82	100.46	80.07	78.27	71.24	70.71	103.84	126.13
4400	93.00	82.77	85.55	96.50	80.88	74.49	71.96	70.58	92.84	102.72
4600	99.69	83.54	84.51	95.46	81.09	73.86	71.70	71.37	91.76	104.98
4800	96.97	83.87	84.98	96.86	83.52	72.99	71.16	69.70	88.11	103.95
5000	94.68	82.70	82.46	96.35	85.62	71.58	71.86	68.05	89.04	118.21
5200	92.97	85.18	83.35	90.16	88.35	70.94	71.27	68.50	89.74	105.45
5400	95.19	87.22	84.11	92.11	88.71	71.57	71.14	67.76	86.00	103.31
5600	90.39	90.77	83.80	91.27	86.57	73.20	72.22	66.16	85.85	104.78
5800	88.99	98.89	82.50	90.37	84.26	73.62	71.64	66.25	86.07	99.14
6000	89.22	96.81	82.12	96.99	81.52	74.16	70.49	67.46	88.60	111.27

Hence,

A. Cate, mother and guide, didn't let her condition get in the way of her duties and provided help to those in need from a place of compassion.

B. Red, a poor person and suffering from disease, had a mother who had been raised on a difficult life and a good heart, but she refused to let her condition get in the way of her duties.

C. The poor boy who had a poor mother and a poor father, but he had a good heart and a good mother, and he was a good person.

D. The poor boy who had a poor mother and a poor father, but he had a good heart and a good mother, and he was a good person.

REV. OR

SPI-SP10T-63

160927

Page 3 of 4

Solid State

SPI RF SP10T Switch

SPI-SP10T-63

Typical Performance Data

TEST CONDITIONS: @Temperature = -35/+25/+85°C, Power in=0 dBm

FREQUENCY (MHz)	INSERTION LOSS			VSWR (Active Port)			VSWR (Com port)			VSWR (Terminated port)		
	(dB)			(:1)			(:1)			(:1)		
	@-35°C	@+25°C	@+85°C	@-35°C	@+25°C	@+85°C	@-35°C	@+25°C	@+85°C	@-35°C	@+25°C	@+85°C
1	2.18	2.28	2.42	1.52	1.55	1.58	1.53	1.56	1.59	1.16	1.05	1.05
5	2.18	2.29	2.42	1.51	1.54	1.57	1.52	1.55	1.59	1.15	1.02	1.03
10	2.18	2.29	2.43	1.51	1.54	1.57	1.52	1.55	1.59	1.15	1.02	1.03
40	2.21	2.32	2.45	1.51	1.54	1.57	1.53	1.55	1.59	1.15	1.02	1.03
50	2.22	2.33	2.46	1.51	1.54	1.57	1.53	1.55	1.59	1.14	1.02	1.03
60	2.23	2.34	2.47	1.51	1.54	1.57	1.53	1.55	1.58	1.14	1.02	1.03
70	2.24	2.35	2.48	1.51	1.54	1.57	1.53	1.55	1.58	1.14	1.02	1.03
80	2.25	2.36	2.49	1.51	1.54	1.56	1.53	1.55	1.58	1.13	1.02	1.03
90	2.27	2.37	2.50	1.51	1.54	1.56	1.53	1.54	1.58	1.13	1.02	1.03
100	2.27	2.38	2.50	1.50	1.53	1.56	1.53	1.54	1.57	1.13	1.02	1.03
200	2.33	2.49	2.62	1.47	1.49	1.51	1.47	1.48	1.50	1.14	1.02	1.02
300	2.42	2.62	2.78	1.40	1.42	1.45	1.37	1.38	1.40	1.15	1.03	1.03
400	2.54	2.75	2.92	1.34	1.35	1.37	1.27	1.27	1.30	1.15	1.03	1.03
500	2.65	2.87	3.04	1.28	1.27	1.27	1.16	1.17	1.19	1.15	1.03	1.03
600	2.75	2.97	3.15	1.20	1.19	1.19	1.09	1.08	1.11	1.15	1.03	1.04
700	2.81	3.05	3.23	1.11	1.10	1.10	1.06	1.05	1.08	1.15	1.03	1.04
800	2.86	3.10	3.29	1.04	1.05	1.05	1.06	1.07	1.09	1.15	1.03	1.04
900	2.90	3.15	3.34	1.07	1.10	1.10	1.08	1.08	1.10	1.13	1.03	1.04
1000	2.94	3.20	3.39	1.14	1.19	1.18	1.08	1.08	1.11	1.14	1.03	1.04
1100	2.98	3.25	3.45	1.21	1.27	1.26	1.06	1.07	1.09	1.14	1.03	1.04
1200	3.03	3.29	3.50	1.28	1.31	1.31	1.03	1.06	1.07	1.14	1.03	1.04
1300	3.07	3.33	3.55	1.33	1.33	1.34	1.02	1.04	1.05	1.15	1.03	1.04
1400	3.10	3.37	3.59	1.32	1.31	1.33	1.01	1.01	1.02	1.15	1.03	1.04
1500	3.12	3.41	3.63	1.30	1.27	1.29	1.03	1.04	1.03	1.15	1.02	1.04
1600	3.13	3.44	3.66	1.26	1.23	1.25	1.09	1.10	1.09	1.15	1.02	1.04
1700	3.15	3.47	3.68	1.22	1.21	1.21	1.16	1.17	1.18	1.15	1.02	1.04
1800	3.14	3.49	3.69	1.20	1.20	1.19	1.25	1.26	1.28	1.14	1.02	1.04
1900	3.14	3.50	3.70	1.19	1.21	1.19	1.35	1.35	1.38	1.14	1.01	1.04
2000	3.14	3.52	3.71	1.20	1.23	1.21	1.44	1.42	1.47	1.14	1.02	1.04
2200	3.24	3.63	3.83	1.30	1.35	1.35	1.48	1.47	1.51	1.14	1.02	1.05
2400	3.44	3.82	4.06	1.41	1.44	1.46	1.38	1.39	1.40	1.13	1.04	1.05
2600	3.59	3.99	4.26	1.39	1.38	1.39	1.32	1.31	1.32	1.13	1.05	1.06
2800	3.67	4.11	4.39	1.22	1.18	1.15	1.31	1.27	1.29	1.14	1.06	1.07
3000	3.74	4.21	4.51	1.03	1.09	1.12	1.21	1.23	1.24	1.16	1.07	1.08
3200	3.81	4.31	4.60	1.26	1.29	1.30	1.21	1.26	1.28	1.17	1.07	1.08
3400	3.79	4.35	4.61	1.37	1.35	1.33	1.32	1.33	1.34	1.17	1.07	1.09
3600	3.73	4.36	4.65	1.29	1.26	1.26	1.26	1.26	1.25	1.17	1.08	1.10
3800	3.88	4.50	4.83	1.30	1.29	1.30	1.03	1.04	1.06	1.18	1.08	1.10
4000	4.16	4.73	5.10	1.39	1.44	1.40	1.20	1.23	1.23	1.18	1.09	1.10
4200	4.37	4.92	5.30	1.42	1.45	1.42	1.35	1.41	1.40	1.15	1.10	1.11
4400	4.46	5.02	5.37	1.38	1.34	1.36	1.35	1.42	1.42	1.12	1.13	1.12
4600	4.49	5.08	5.39	1.31	1.29	1.30	1.45	1.49	1.52	1.09	1.16	1.14
4800	4.53	5.15	5.41	1.24	1.30	1.28	1.64	1.66	1.68	1.08	1.20	1.15
5000	4.55	5.18	5.41	1.28	1.26	1.26	1.54	1.61	1.59	1.08	1.23	1.17
5200	4.63	5.23	5.47	1.22	1.21	1.21	1.43	1.49	1.49	1.12	1.27	1.19
5400	4.75	5.29	5.56	1.19	1.22	1.16	1.67	1.69	1.70	1.16	1.31	1.21
5600	4.79	5.29	5.60	1.22	1.21	1.21	1.68	1.75	1.73	1.20	1.34	1.23
5800	4.89	5.39	5.72	1.36	1.44	1.46	1.37	1.46	1.43	1.26	1.37	1.25
6000	5.02	5.60	5.87	1.67	1.75	1.73	1.27	1.38	1.33	1.30	1.39	1.26
6200	4.95	5.59	5.82	1.69	1.60	1.62	1.32	1.40	1.34	1.33	1.40	1.28
6500	4.95	5.65	5.92	1.02	1.17	1.11	1.31	1.38	1.36	1.36	1.41	1.28
7000	5.41	5.96	6.30	1.49	1.41	1.38	1.41	1.38	1.42	1.37	1.39	1.28
7500	5.64	6.37	6.66	2.02	1.85	1.97	1.61	1.62	1.63	1.40	1.36	1.28
8000	5.42	6.18	6.45	1.34	1.21	1.24	1.21	1.12	1.14	1.44	1.34	1.31

Notes:

- Performance and quality data for this device will only be provided when it is used within the conditions specified in the test conditions and test methods of the applicable documents.
- Electrical specifications and performance data are provided for this device when it is used within the conditions specified in the test conditions and test methods of the applicable documents.
- Performance data for this device will only be provided when it is used within the conditions specified in the test conditions and test methods of the applicable documents.




The highest performance is achieved when the device is used within the conditions specified in the test conditions and test methods of the applicable documents.



Solid State SPI RF SP10T Switch

SPI-SP10T-63

Typical Performance Curves

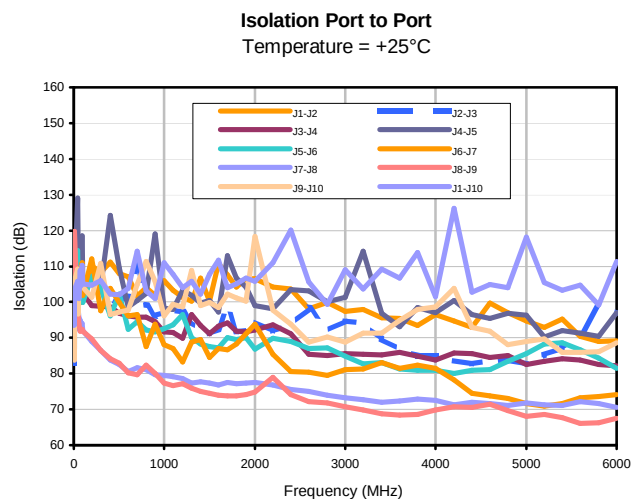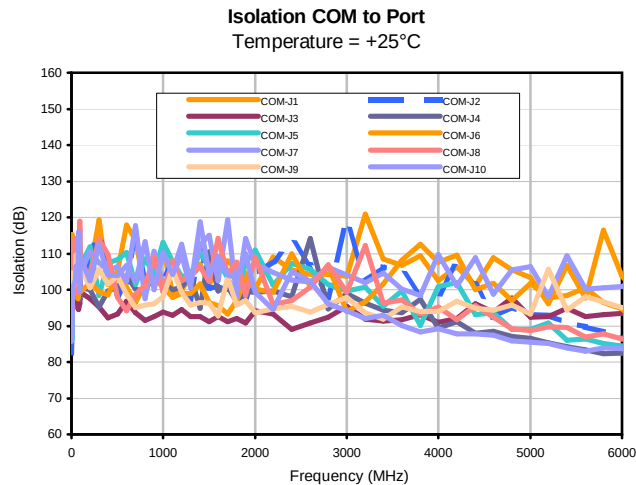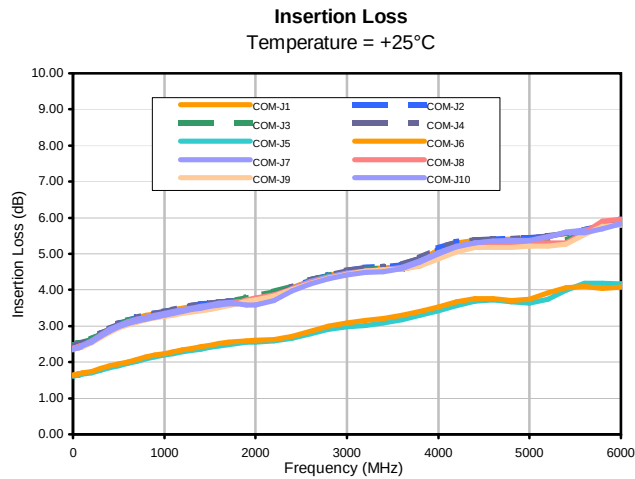

Note:

A. Performance and quality of this product will not be guaranteed if it is not handled according to the handling instructions provided in the product data sheet. B. Electrical specifications and performance data are based on a typical design based on the data sheet. Actual performance may vary from the design. C. The performance of this product will not be guaranteed if it is not handled according to the handling instructions provided in the product data sheet. The highest performance will be achieved if the product is handled according to the handling instructions provided in the product data sheet.




Solid State SPI RF SP10T Switch


SPI-SP10T-63

Typical Performance Curves


Insertion Loss

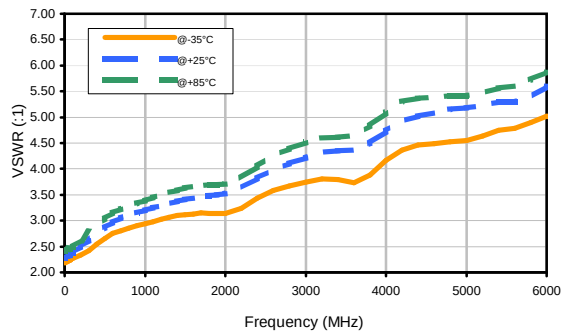


VSWR (COM)

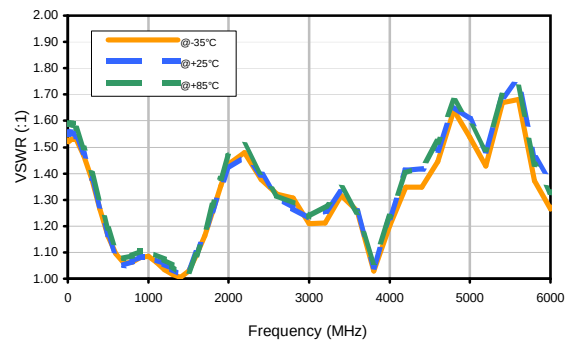

VSWR (Active port)

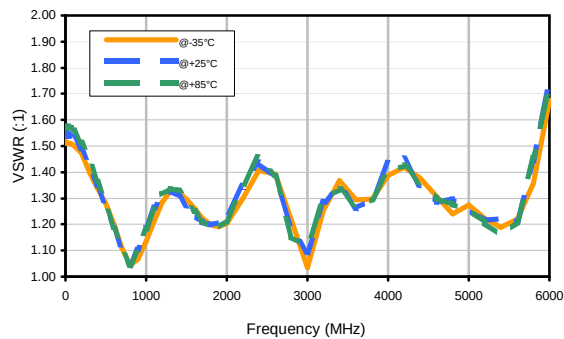

VSWR (Terminated port)

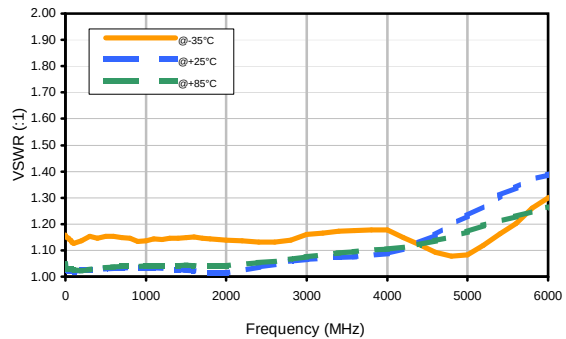

Note:

A. Performance and quality of the components will not necessarily meet the specifications shown in this data sheet. The components are provided for reference only. The components are not intended for use in safety-critical applications.
B. Electrical specifications and performance data are shown in this data sheet as typical values based on data obtained from a representative sample of components. Actual performance may vary from these values.
C. The performance of the components is dependent on the test conditions. The test conditions are shown in the test conditions section of the data sheet. The test conditions are not intended to be used as a guide for design.




Case Style

PM

Outline Dimensions

PM2137

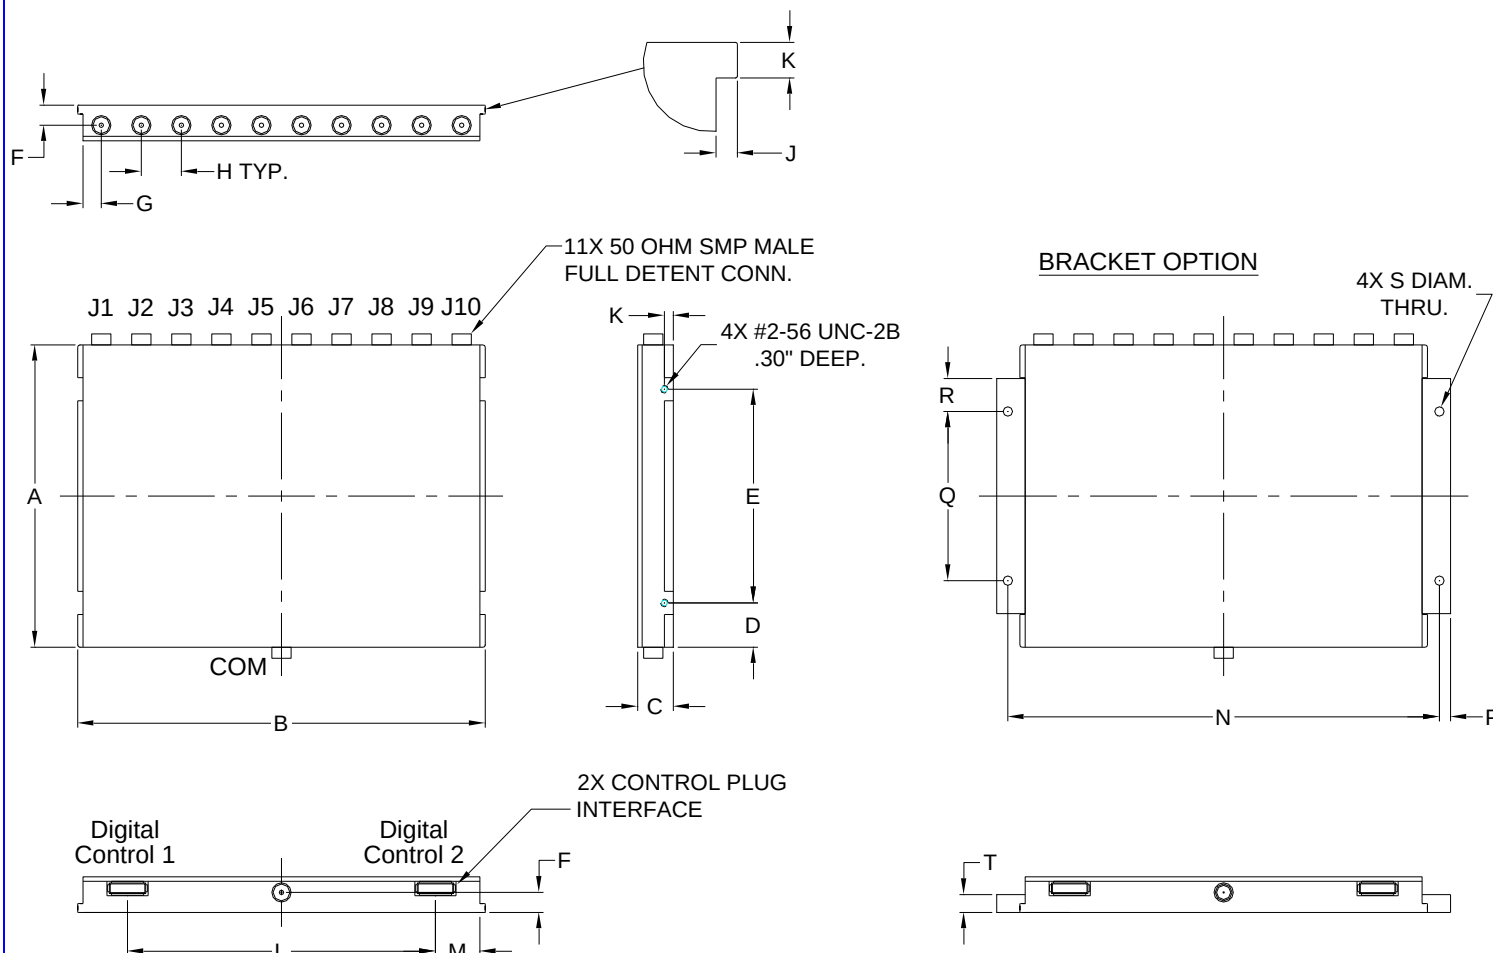

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P
PM2137	3.395 (86.23)	4.580 (116.33)	.400 (10.16)	.497 (12.64)	2.400 (60.96)	.225 (5.72)	.205 (5.21)	.450 (11.4)	.060 (1.52)	.100 (2.54)	3.460 (87.88)	.500 (12.70)	4.850 (123.19)	.125 (3.18)

CASE#	Q	R	S	T	WT. GRAMS
PM2137	1.900 (48.26)	.370 (9.40)	.106 (2.69)	.200 (5.08)	200

Dimensions are in inches (mm). Tolerances: 2PL. +/- .03; 3PL. +/- .015

Notes:

- Case material: Aluminum alloy.
- Case finish for RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



Environmental Specifications ENV55

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-0° to 50° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 60° C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F Class 3