

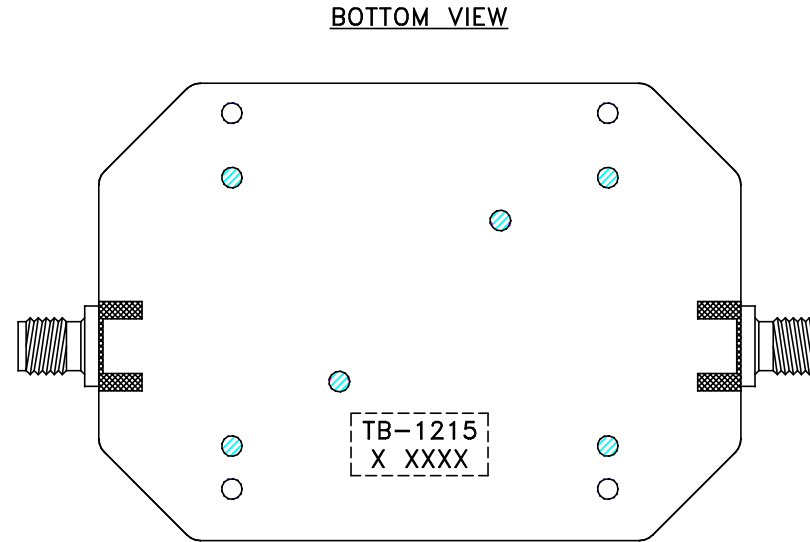



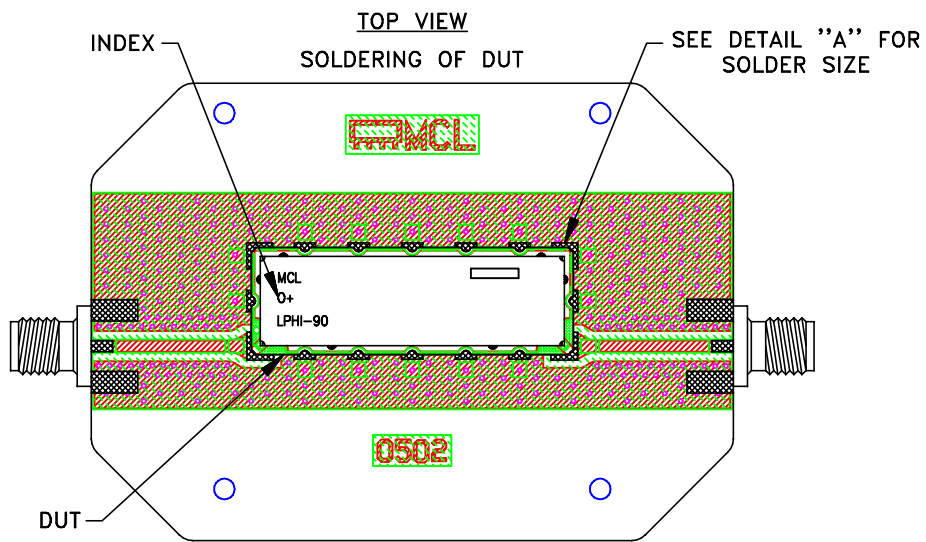

DETAIL "A"
SOLDER PASTE LOCATION FOR DUT

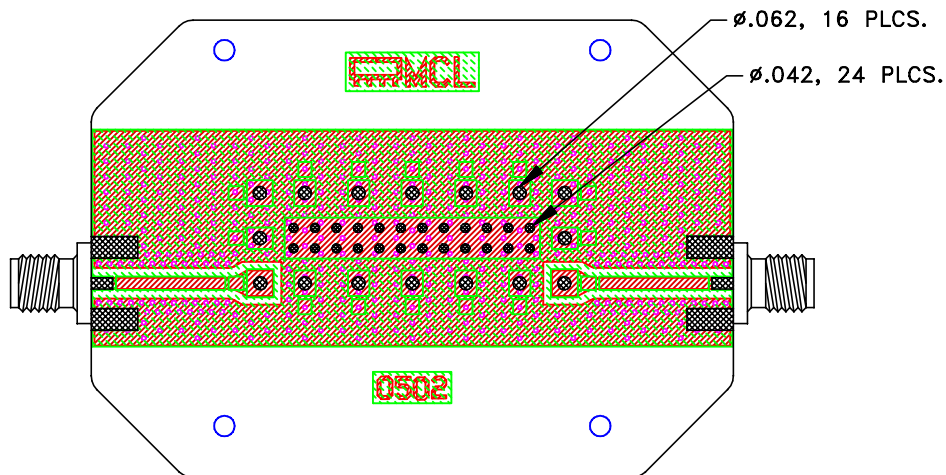

NOTES:

1.  DENOTES SOLDER.
2.  DENOTES METALLIZATION.
3.  DENOTES SOLDER MASK.

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± ANGLES ± FRACTIONS ±	DRAWN	SPM	11 FEB 25
	CHECKED	DDR	12 FEB 25
	APPROVED	KSK	

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


BSHEETA1.DWG REV:A DATE:01/12/94

Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

EVAL BOARD, FOR LPHI-90+



SIZE	CODE IDENT	DRAWING NO:	REV:
B	15542	TB-LPHI-90-20+	OR
FILE:	WTB-LPHI-90+	SCALE: 1.5:1	SHEET: 1 OF 2

THIRD ANGLE PROJECTION



OR NPO-005037	NEW RELEASE	FEB 25	SPM	VC
REV ECN No.	DESCRIPTION	DATE	DR	AUTH
REVISIONS				

Evaluation Board and Circuit

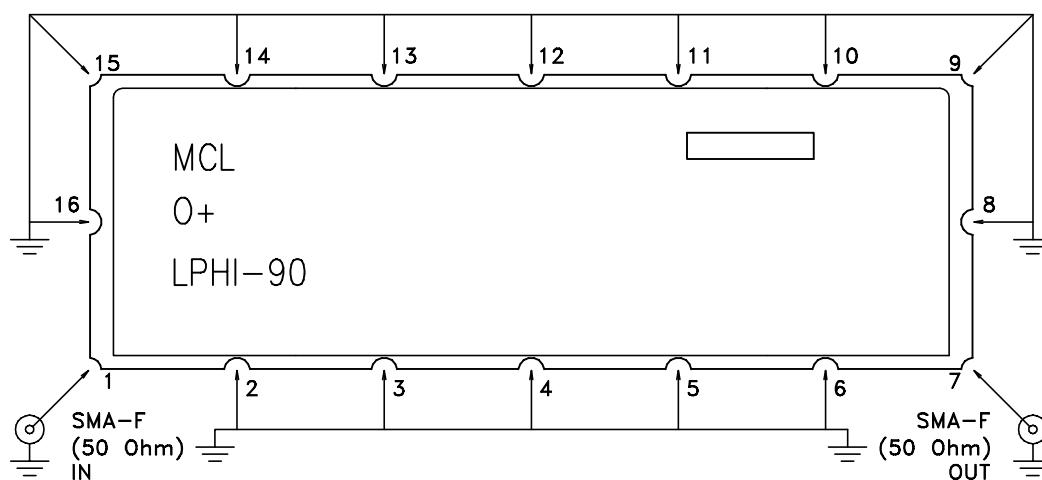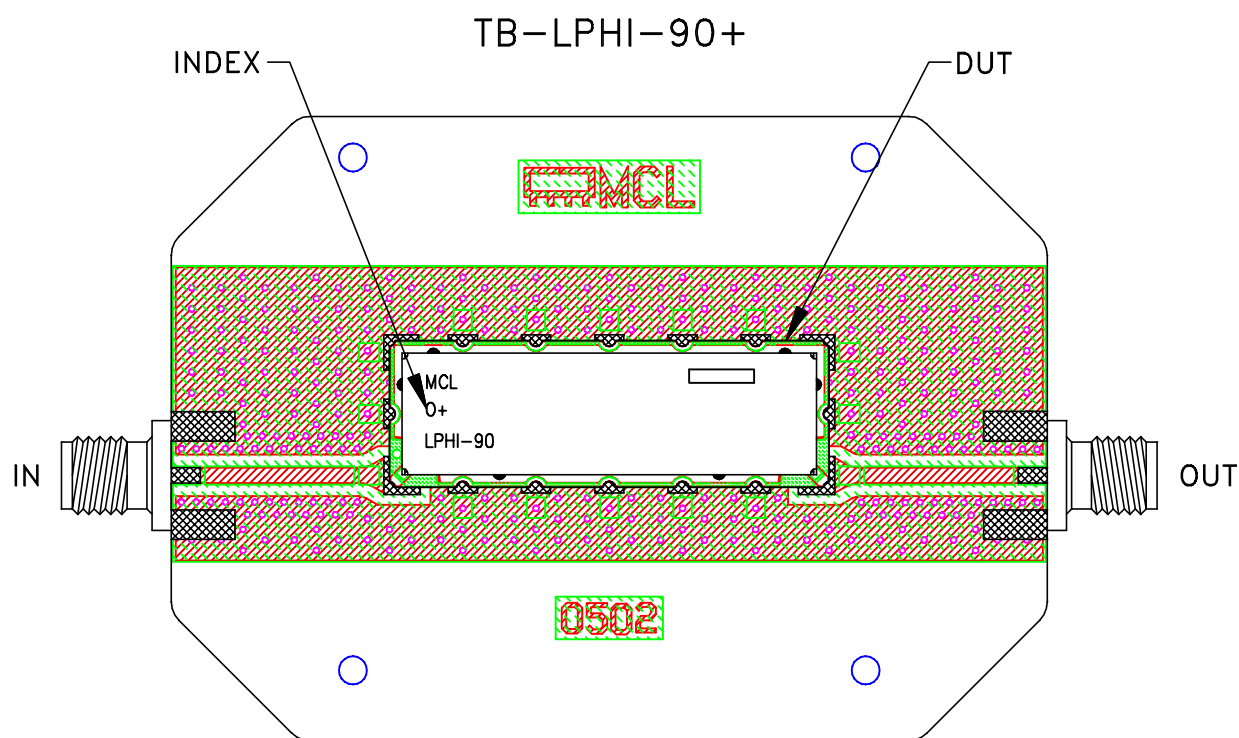

Schematic diagram

Notes:

1. 50 Ohm SMA female connectors.
2. PCB Material: ROGERS (R04350B) OR Equivalent
Dielectric Constant=3.48, Thickness=.023 ± .002 inch.

 **Mini-Circuits®**