

Surface Mount

Triplexer

TPLX-F2700+

50 Ω (1-2700 MHz)

(1 - 512, 608-1000, 1400-2700 MHz)

The Big Deal

- Low insertion loss
- 50 Ω Impedance
- Miniature shielded package



CASE STYLE: HP1156

Product Overview

TPLX-F2700+ is a high performance 50 Ω triplexer with the lowpass channel-1 at 1-512 MHz, bandpass channel-2 at 608-1000 MHz and highpass channel-3 at 1400-2700 MHz. The channels are well isolated to minimize inter-channel interference and have minimal insertion loss through their respective bands. The triplexer is built in a shielded package, this triplexer finds its application in telecommunication and broadband.

Key Features

Feature	Advantages
Low passband insertion loss, 1 dB typical at lowpass and Band pass channel, 0.8 dB typical at the High pass channel	Very low insertion loss ensures less signal loss through all the channels.
Good co-channel rejection	Rejection of 20-30 dB ensures sufficient isolation between the channels
Miniature shielded package	Triplexer is designed into a surface mount package

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Triplexer

50Ω (1 to 2700 MHz)
(1-512, 608-1000, 1400-2700 MHz)

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

COMMON PORT	2
CHANNEL-1	11
CHANNEL-2	9
CHANNEL-3	18
GROUND	1,3,4,5,6,7,8,10,12,13,14,15,16,17


Outline Drawing

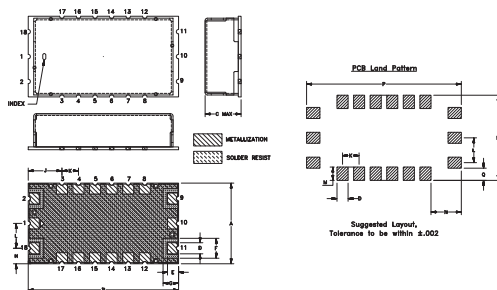

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.730	1.360	.350	.100	.100	.180	.140	.140	.305
18.54	34.54	8.89	2.54	2.54	4.57	3.56	3.56	7.75
K	L	M	N	P	Q	R		Wt.
.150	.225	.120	.275	1.400	.110	.770		grams
3.81	5.72	3.05	6.99	35.56	2.79	19.56		6.0

Demo Board MCL P/N: TB-695+ Suggested PCB Layout (PL-418)

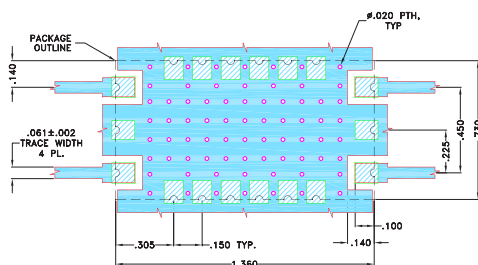

NOTES:

1. TRACE WIDTH IS SHOWN FOR OAK-602, WITH DIELECTRIC THICKNESS .022"±.0015". COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

TPLX-F2700+



CASE STYLE: HP1156

Features

- Low insertion loss
- 50Ω Impedance
- Miniature shielded package

Applications

- Telecommunications and Broadband

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications at 25°C







Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	Low Pass, Channel - 1	1-512	-	1.0	1.8
		Band Pass, Channel - 2	608-1000	-	1.0	1.8
		High Pass, Channel - 3	1400-2700	-	0.8	1.6
	Return Loss	Low Pass, Channel - 1	1-512	9	14	-
		Band Pass, Channel - 2	608-1000	8	13	-
		High Pass, Channel - 3	1400-2700	9	14	-
		Common	1-512	9	14	-
			608-1000	8	13	-
Stop Band Isolation	Low Pass, Channel - 1	1-512	15	20	-	-
		608-2700	20	24	-	-
		1400-2700	20	27	-	-
	Band Pass, Channel - 2	1-512	25	31	-	-
		608-1000	18	23	-	-
		1400-2700	18	23	-	-

Typical Performance Data at 25°C

FREQ. (MHz)	INSERTION LOSS (dB)				RETURN LOSS (dB)		
	Low Pass Channel -1	Band Pass Channel -2	High Pass Channel -3	Common	Low Pass Channel -1	Band Pass Channel -2	High Pass Channel -3
1.00	0.04	72.13	81.69	45.65	46.45	0.01	0.01
30.00	0.09	42.67	52.49	30.42	30.28	0.01	0.01
160.00	0.24	30.29	37.81	21.10	20.71	0.22	0.04
380.00	0.49	26.72	33.92	21.94	20.13	0.86	0.13
512.00	1.10	26.66	34.68	16.09	15.06	1.37	0.21
530.00	2.70	10.04	32.58	8.60	7.27	2.84	0.22
535.00	3.53	7.96	31.96	7.67	6.10	3.77	0.22
590.00	18.27	1.20	35.35	15.16	1.43	18.73	0.26
605.00	30.52	0.90	35.96	18.25	0.84	21.93	0.27
608.00	33.62	0.88	36.07	18.45	0.79	21.95	0.27
800.00	44.42	0.87	33.37	15.07	0.31	14.80	0.47
1000.00	42.80	1.11	27.30	13.74	0.25	15.34	1.29
1040.00	42.53	1.32	39.86	11.44	0.25	12.79	1.70
1100.00	42.91	2.19	12.54	8.66	0.25	8.77	2.42
1160.00	44.66	4.29	5.53	8.11	0.26	5.73	3.77
1300.00	49.10	9.53	1.68	14.05	0.27	9.69	14.72
1400.00	62.01	26.24	0.55	20.89	0.29	1.92	20.70
1800.00	63.41	36.60	0.57	15.05	0.36	2.10	14.48
2200.00	66.50	82.36	0.48	21.29	0.41	0.64	19.50
2700.00	48.89	51.42	0.80	13.07	0.46	0.55	12.97

Functional Schematic




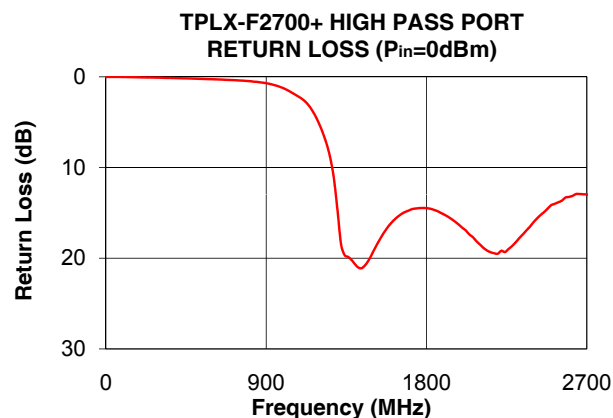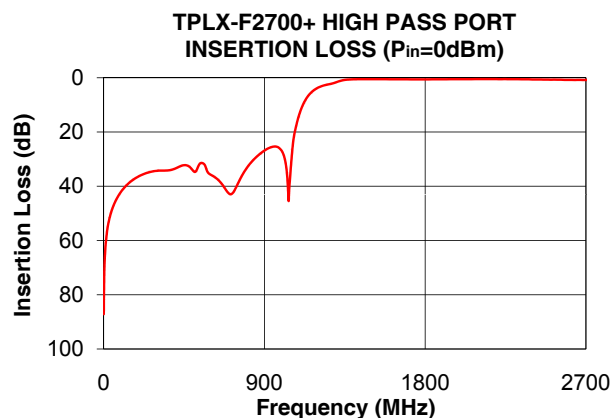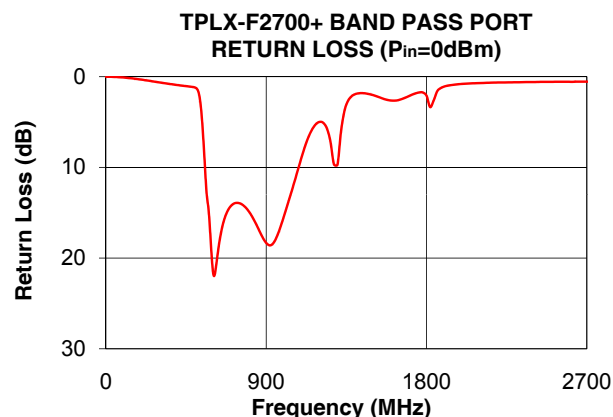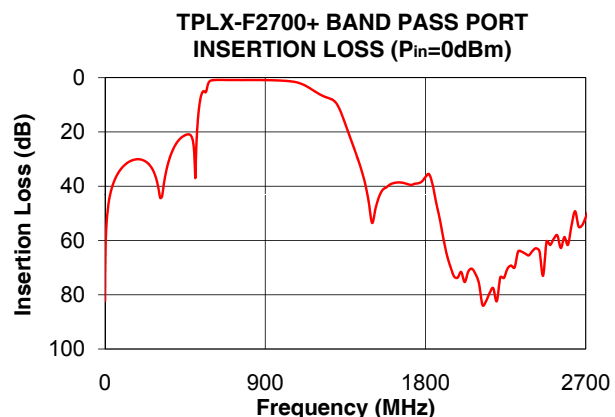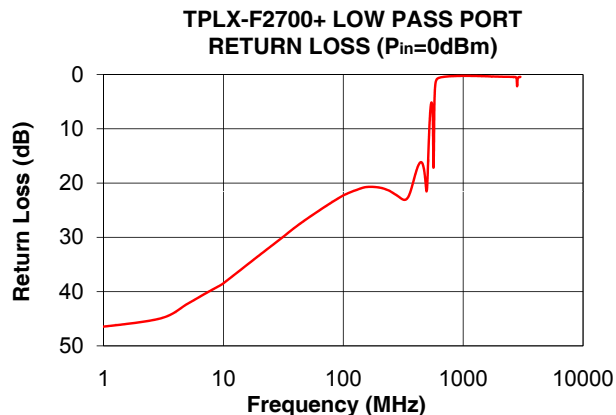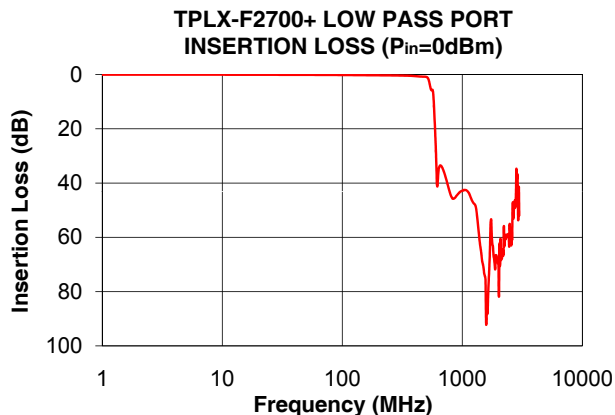

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp









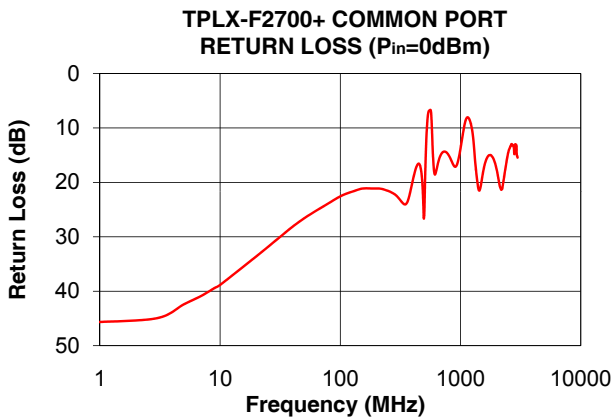





Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

FREQUENCY (MHz)	INSERTION LOSS (dB)			Cross over isolation (dB)			RETURN LOSS (dB)			
	Lowpass port	Bandpass port	Highpass port	(between LPF and HPF)	(between BPF and HPF)	(between LPF and BPF)	Common port	Lowpass port	Bandpass port	Highpass port
0.3	0.08	82.25	87.15	87.68	92.20	82.27	44.63	44.94	0.00	0.01
1	0.04	72.13	81.69	81.81	103.45	72.25	45.65	46.45	0.00	0.00
7	0.04	55.26	65.27	65.15	118.46	55.29	40.84	40.41	0.00	0.00
70	0.14	35.55	44.94	45.46	80.67	35.74	24.60	24.39	0.05	0.01
100	0.18	32.84	41.74	42.46	75.12	33.14	22.57	22.28	0.09	0.02
120	0.20	31.63	40.17	40.98	72.58	32.00	21.85	21.51	0.13	0.03
200	0.27	30.14	36.20	37.09	67.13	30.71	21.13	20.83	0.32	0.06
300	0.36	40.82	34.28	34.61	75.34	42.84	22.69	22.75	0.63	0.09
370	0.46	28.32	34.06	33.85	61.25	29.18	22.94	21.04	0.83	0.13
380	0.49	26.72	33.92	33.81	59.89	27.43	21.94	20.13	0.86	0.13
390	0.52	25.37	33.72	33.79	58.40	25.91	20.82	19.21	0.89	0.14
410	0.59	23.33	33.17	33.79	56.51	23.41	18.69	17.55	0.94	0.15
475	0.77	20.95	32.57	34.19	54.73	20.38	18.66	17.93	1.10	0.19
500	0.85	26.95	34.22	34.58	62.11	27.64	25.51	21.00	1.19	0.20
508	0.97	35.96	34.67	34.82	67.47	35.08	18.86	17.31	1.28	0.21
512	1.10	26.66	34.68	35.01	59.04	27.97	16.09	15.06	1.37	0.21
530	2.70	10.04	32.58	36.99	43.92	12.64	8.60	7.27	2.84	0.22
565	5.63	5.39	32.07	40.98	40.28	5.09	6.75	17.04	12.83	0.24
575	8.30	3.17	33.71	43.92	38.50	7.57	8.98	6.27	14.46	0.25
608	33.62	0.88	36.07	68.09	37.72	34.19	18.45	0.79	21.95	0.27
610	35.89	0.87	36.14	70.20	37.81	37.17	18.53	0.76	21.87	0.27
650	33.59	0.82	38.25	73.40	40.36	33.20	16.42	0.52	16.82	0.30
695	35.25	0.85	42.27	71.96	44.56	35.13	14.71	0.42	14.41	0.34
785	43.27	0.87	34.87	74.12	37.73	43.74	14.79	0.32	14.44	0.44
800	44.42	0.87	33.37	76.68	36.10	44.19	15.07	0.31	14.80	0.47
815	45.18	0.87	32.01	75.99	34.66	43.99	15.40	0.30	15.24	0.49
830	45.73	0.87	30.85	64.96	33.41	43.76	15.77	0.30	15.76	0.53
875	45.30	0.87	28.04	72.16	30.22	43.02	16.85	0.28	17.55	0.63
935	43.70	0.93	25.64	70.42	27.80	43.19	16.70	0.26	18.46	0.85
1000	42.80	1.11	27.30	67.39	30.01	43.24	13.74	0.25	15.34	1.29
1014	42.66	1.17	29.96	69.49	32.71	42.83	12.93	0.25	14.45	1.42
1040	42.53	1.32	39.86	80.91	38.77	41.63	11.44	0.25	12.79	1.70
1100	42.91	2.19	12.54	55.55	16.92	38.49	8.66	0.25	8.77	2.42
1160	44.66	4.29	5.53	50.01	11.30	37.17	8.11	0.26	5.73	3.77
1200	46.27	5.91	3.64	49.14	10.05	38.24	8.75	0.26	4.98	5.32
1260	47.71	7.63	2.39	49.28	8.84	44.97	11.00	0.27	7.12	9.00
1300	49.10	9.53	1.68	51.20	9.55	39.81	14.05	0.27	9.69	14.72
1320	51.21	12.00	1.22	54.01	11.69	37.51	15.98	0.28	5.99	18.47
1390	60.89	24.44	0.57	67.19	23.56	38.88	20.43	0.29	2.01	20.46
1400	62.01	26.24	0.55	68.45	25.34	39.43	20.89	0.29	1.92	20.70
1435	65.42	32.96	0.51	70.90	31.59	41.48	21.51	0.30	1.81	21.10
1500	70.96	53.52	0.49	74.53	42.54	46.24	19.60	0.31	2.03	19.29
1560	75.64	41.28	0.51	74.17	41.06	52.39	17.48	0.32	2.45	17.20
1600	83.91	39.39	0.53	85.31	40.40	63.94	16.46	0.33	2.63	16.15
1700	63.97	39.23	0.56	65.81	40.37	59.84	15.13	0.35	2.15	14.74
1760	59.60	38.89	0.57	60.45	40.41	53.95	14.98	0.36	1.73	14.47
1800	63.41	36.60	0.57	65.06	38.53	56.61	15.05	0.36	2.10	14.48
1860	69.95	46.12	0.55	69.70	48.09	51.13	15.48	0.37	1.60	14.80
1940	67.34	69.68	0.52	68.56	71.34	53.18	16.52	0.38	0.92	15.68
2000	69.22	71.58	0.50	90.78	79.93	53.34	17.70	0.39	0.79	16.63
2020	81.80	75.30	0.49	76.53	77.55	53.63	18.14	0.39	0.77	16.94
2040	62.45	71.42	0.49	62.47	68.77	53.06	18.70	0.40	0.75	17.37
2120	67.19	83.79	0.47	67.53	98.03	51.77	20.69	0.40	0.69	18.87
2200	66.50	82.36	0.48	70.01	77.26	50.15	21.29	0.41	0.64	19.50
2340	59.49	64.11	0.53	58.61	64.46	47.23	17.98	0.42	0.60	17.39
2460	63.29	72.98	0.65	65.29	67.37	43.51	15.16	0.43	0.57	14.91
2500	57.74	61.64	0.68	64.82	62.86	44.43	14.44	0.43	0.57	14.15
2560	62.97	62.74	0.71	65.95	66.57	41.95	13.73	0.43	0.56	13.65
2640	47.09	49.22	0.79	47.31	49.27	42.35	13.01	0.44	0.55	12.92
2700	48.89	51.42	0.80	50.20	51.23	39.71	13.07	0.46	0.55	12.97

Typical Performance Curves

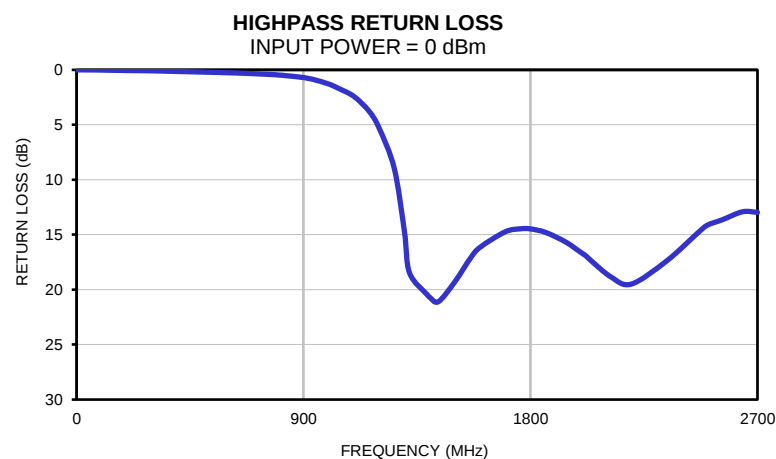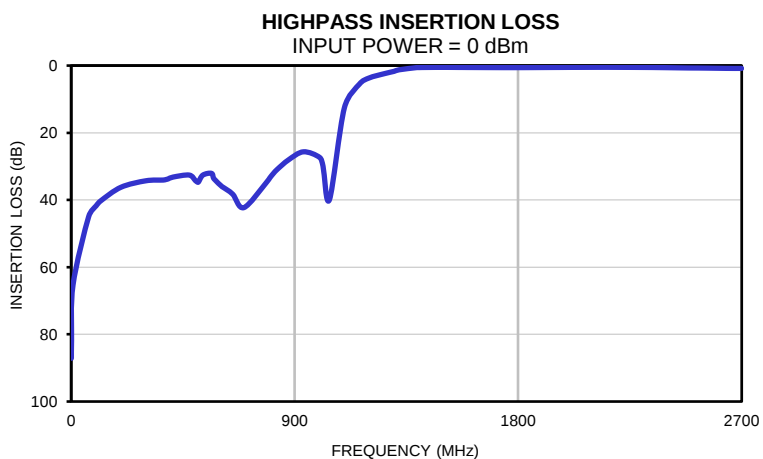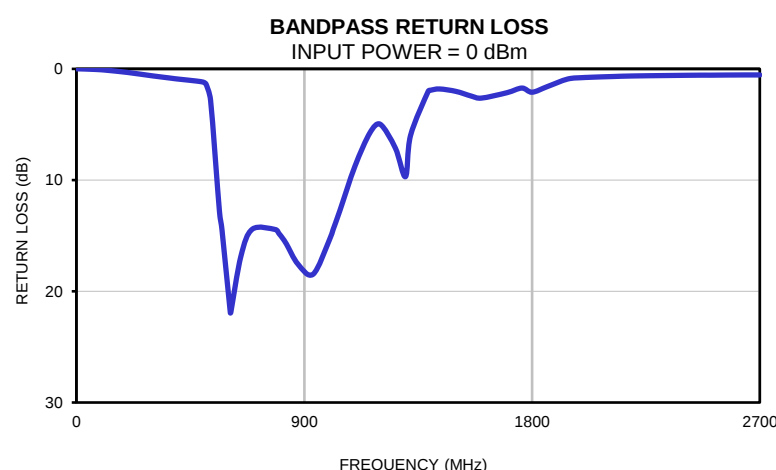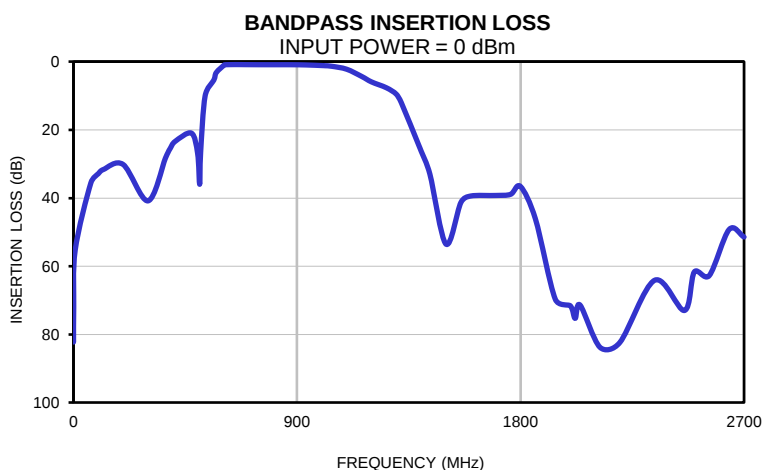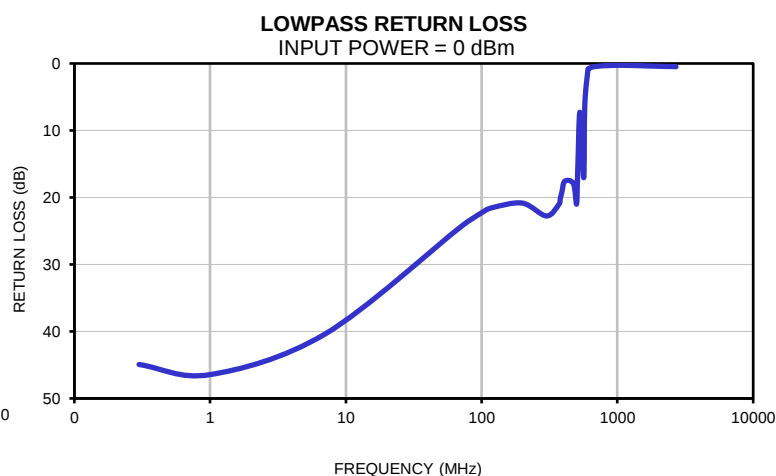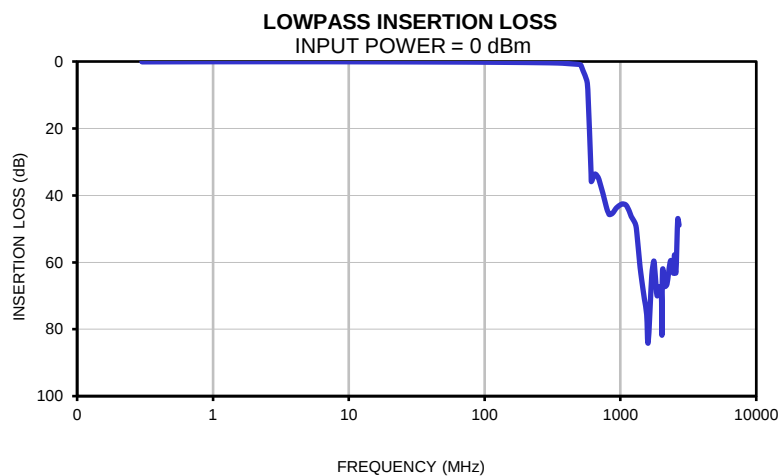


Typical Performance Curves

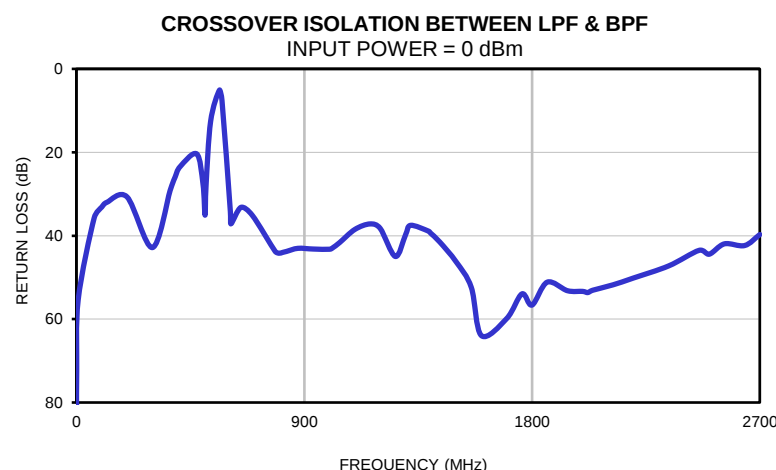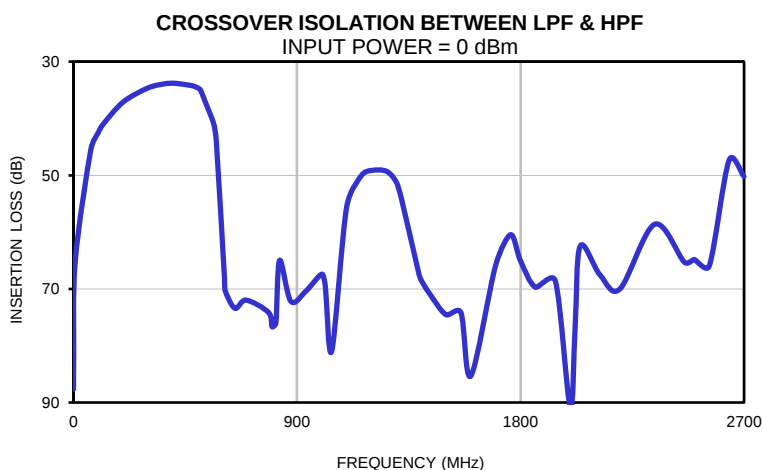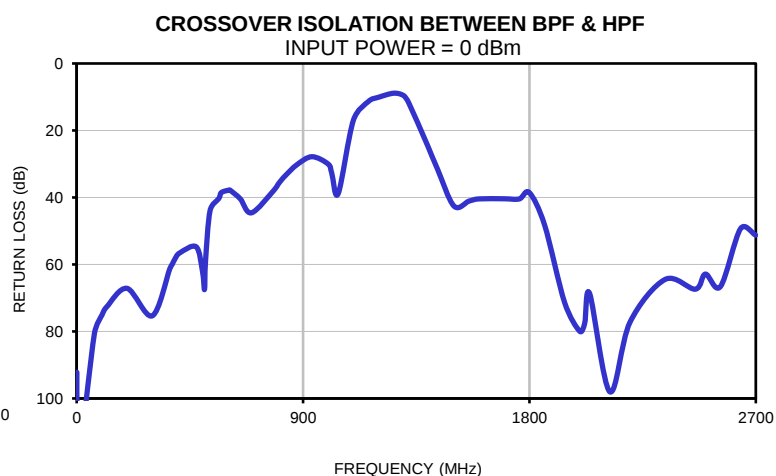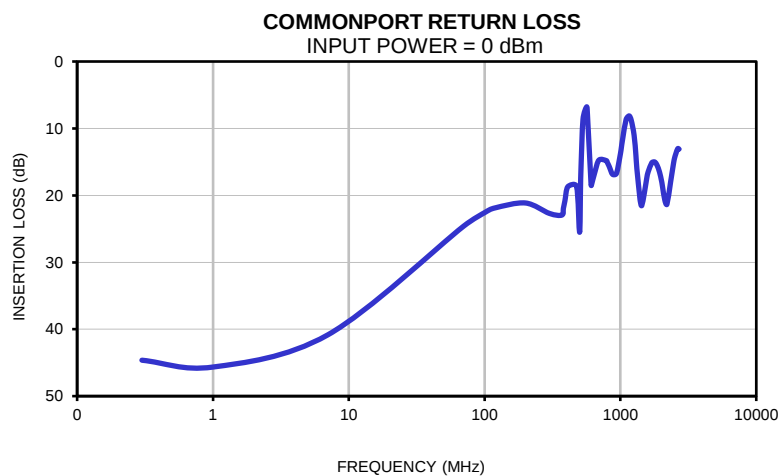


Outline Dimensions

HP1156

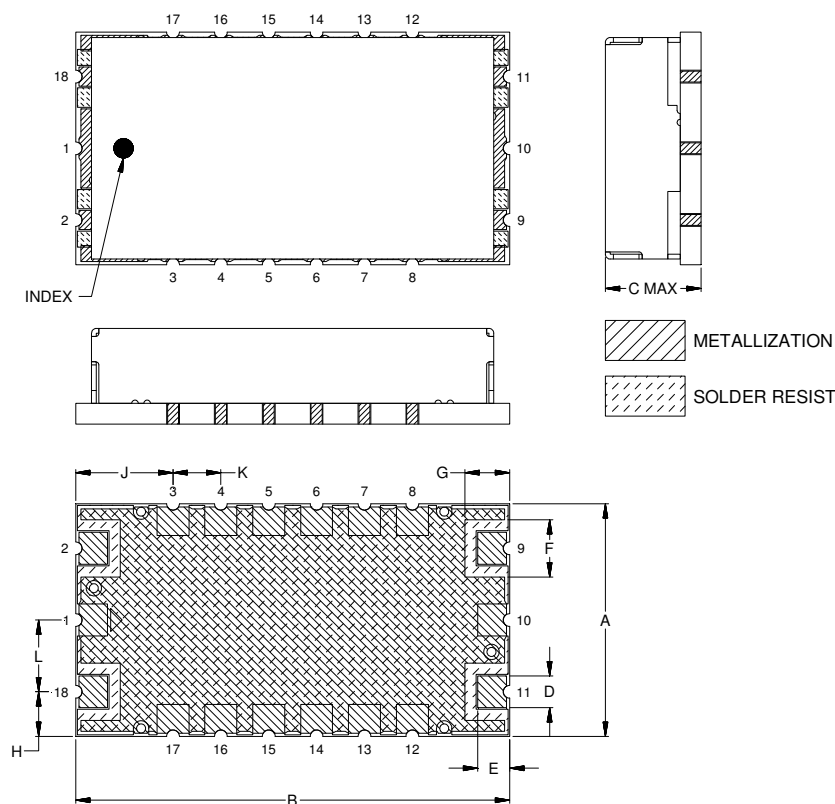

PCB Land Pattern

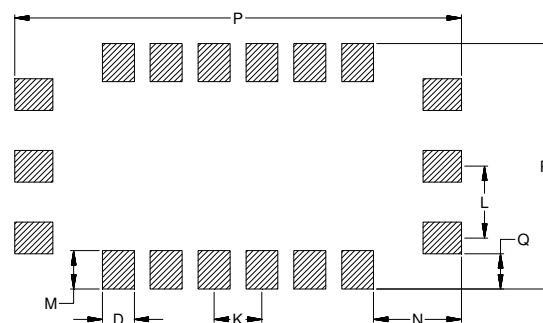

Suggested Layout,
Tolweance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M
HP1156	.730 (18.54)	1.360 (34.54)	.350 (8.89)	.100 (2.54)	.100 (2.54)	.180 (4.57)	.140 (3.56)	.140 (3.56)	.305 (7.75)	.150 (3.81)	.225 (5.72)	.120 (3.05)

CASE#	N	P	Q	R	WT.GRAM
HP1156	.275 (6.99)	1.400 (35.56)	.110 (2.79)	.770 (19.56)	6.0

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Nickel-Silver alloy.
- Base: Printed wiring laminate.
- Termination finish:
For RoHS Case Styles: 3-5 μ inch (.08-.13microns) Gold over 120-240 μ inch (3.05-6.10microns) Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F89

DEVICE ORIENTATION IN T&R

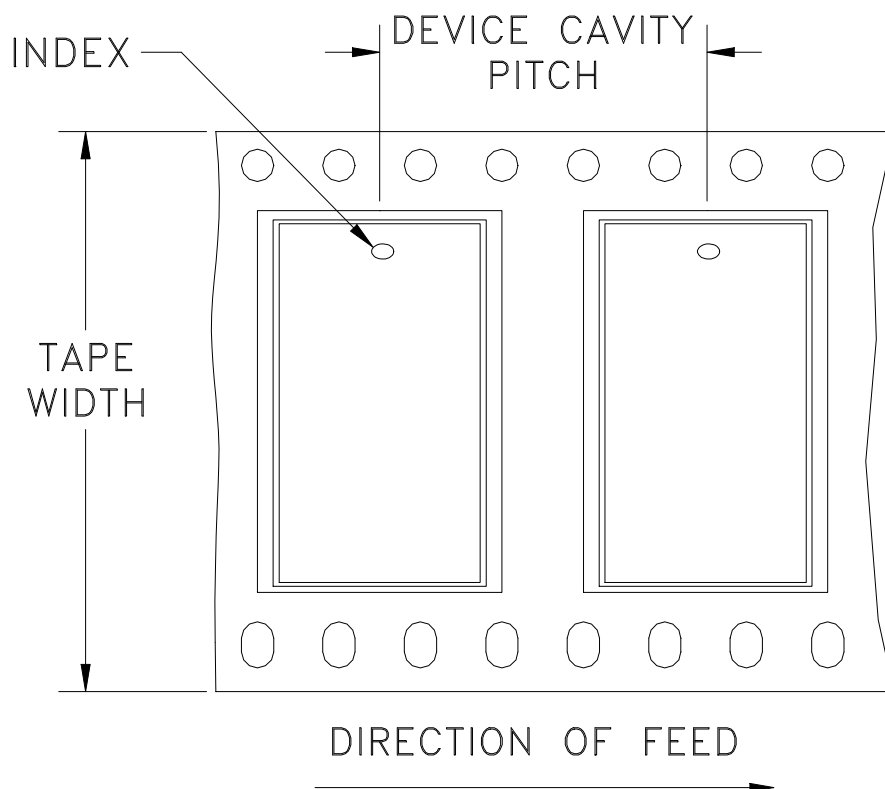

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel
56	32	13	100

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET <http://www.minicircuits.com>
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M145648	NEW RELEASE	MAR 14	DDR	MD

[illegible]

 DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES	DRAWN	DDR	14 MAR 14
TOLERANCES ON:	CHECKED	MD	14 MAR 14
2 PL DECIMALS ±	APPROVED	MD	14 MAR 14
3 PL DECIMALS ± .005"			
ANGLES ±			
FRACTIONS ±			

 Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95





Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, 18FL01, HP1156, BPF
TB-695+, 50 0hm

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-418	REV: OR
FILE:	98PL418	SCALE: 3:1	SHEET: 1 OF 1

Evaluation Board and Circuit

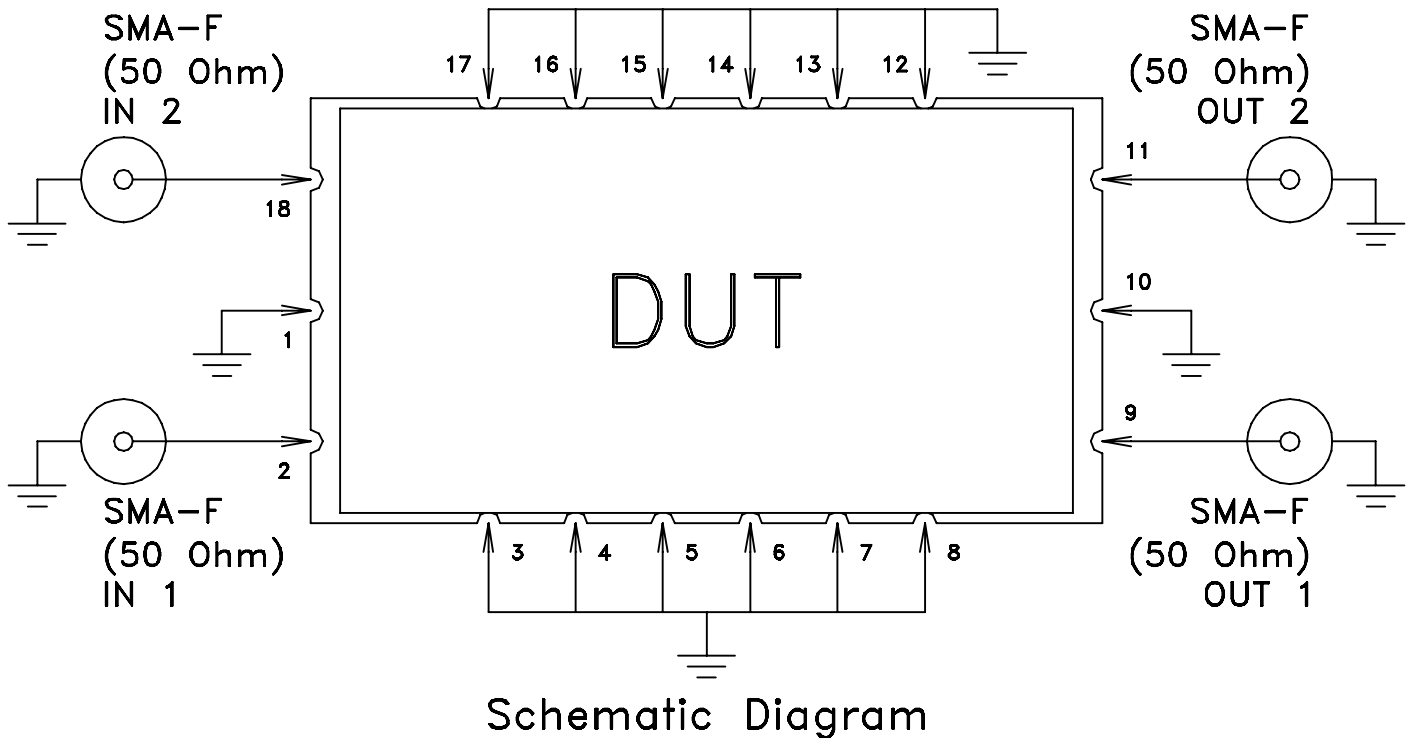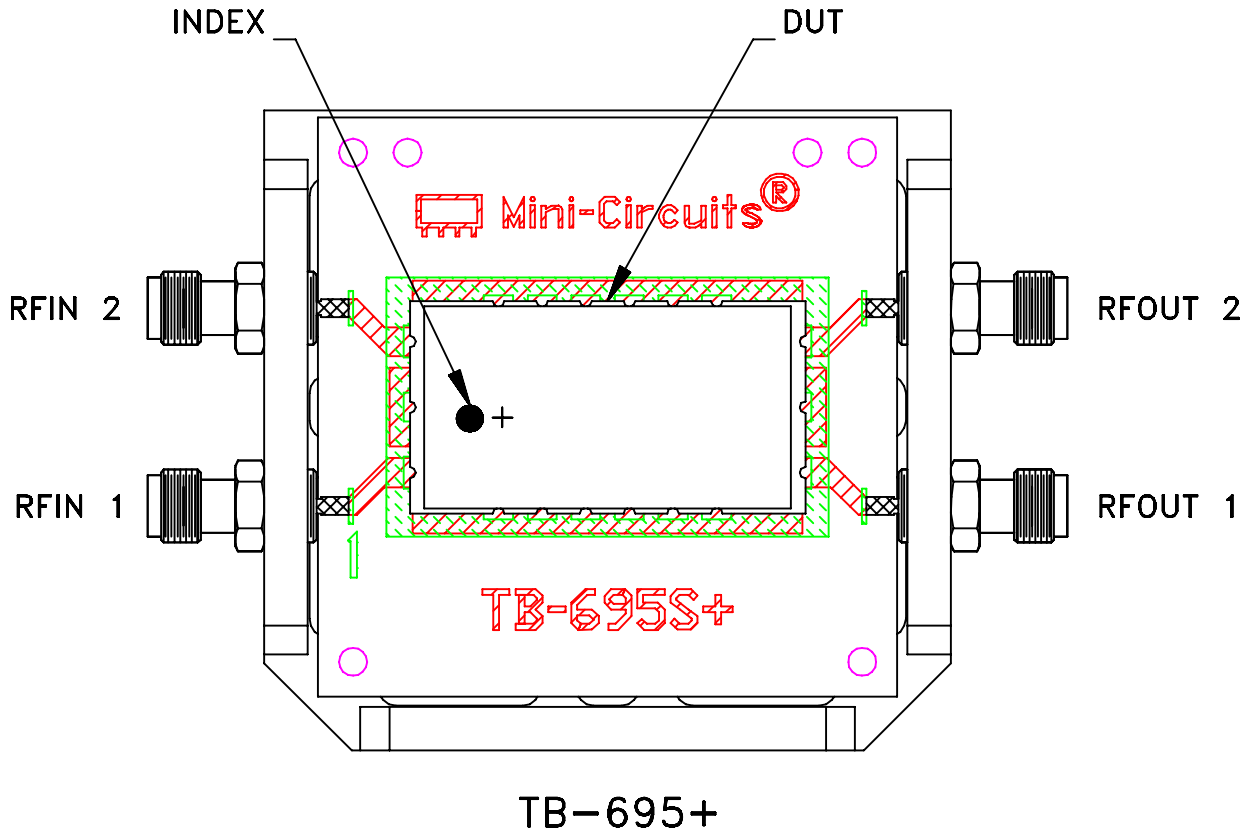

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: OAK-602 OR Equivalent
Dielectric Constant= $2.50 \pm .04$, Thickness=.022 Inch.

Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Temperature Cycling	-65° to 150°C, 100 cycles	JESD22-A104
Temperature Humidity	85°C/ 85% RH, 168 hours	JESD22-113
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 240°C peak (Non-RoHS) or 260°C (RoHS)	J-STD-020
Solderability	10X magnification, 95% coverage	JESD22-B102, Method 1: Dip and Look Test
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D