

Directional Coupler

TRDC-ED12605/3

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.



CASE STYLE : 99-01-1215


ELECTRICAL SPECIFICATIONS 75Ω @ +25°C					
Parameter		Min.	Typ.	Max.	Units
Frequency		5		1800	MHz
Coupling	Nominal		13.00		dB
	Flatness		± 0.48		dB
Mainline Loss **	5-50 MHz		0.80		dB
	50-900 MHz		0.60		dB
	900-1800 MHz		1.10		dB
Directivity	5-50 MHz		25		dB
	50-900 MHz		20		dB
	900-1800 MHz		10		dB
VSWR	5-1800 MHz		1.20		(:1)
RF Power Input	5-1800 MHz			1.0	W

Note: **Mainline loss includes theoretical coupled power loss of 0.223dB at 13dB coupling.

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
INPUT	1
OUTPUT	6
COUPLED FORWARD	3
NOT USED	5
75Ω TERM. EXTERNAL	4
GROUND	2

Electrical Schematic

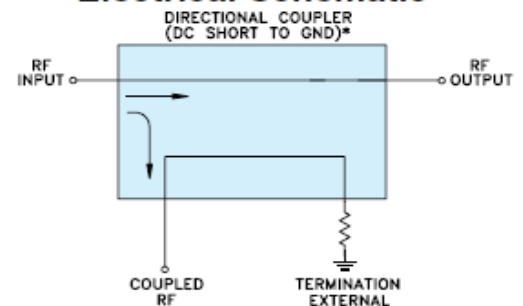

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.

Directional Coupler

TRDC-ED12605/3





Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	COUPLING (dB)	DIRECTIVITY (dB)	RETURN LOSS		
				IN	OUT	CPL
1.0	10.27	23.51	19.62	0.48	0.47	0.49
3.0	3.26	16.86	21.81	3.03	3.00	3.08
5.0	1.55	15.37	24.10	5.82	5.78	5.89
7.0	0.94	14.85	26.15	8.24	8.21	8.31
9.0	0.66	14.62	27.79	10.31	10.30	10.38
10.0	0.59	14.55	28.42	11.24	11.24	11.30
20.0	0.45	14.41	30.63	18.08	18.56	18.11
30.0	0.59	14.54	31.09	20.69	22.64	20.64
40.0	0.65	14.63	31.05	21.29	24.03	21.16
50.0	0.65	14.65	30.78	21.72	24.82	21.55
60.0	0.64	14.67	30.70	22.17	25.40	21.95
70.0	0.63	14.68	30.40	22.65	25.90	22.35
80.0	0.61	14.68	30.43	23.11	26.41	22.73
90.0	0.60	14.68	30.03	23.53	26.92	23.05
100.0	0.59	14.68	29.77	23.90	27.50	23.32
150.0	0.55	14.69	28.44	24.99	30.53	23.90
200.0	0.54	14.69	26.99	25.54	31.89	24.30
250.0	0.53	14.69	25.46	26.02	33.84	24.38
300.0	0.53	14.69	23.97	26.45	34.78	24.60
350.0	0.53	14.69	22.92	26.94	36.53	24.63
400.0	0.53	14.69	22.02	27.45	37.05	24.95
450.0	0.54	14.68	20.68	27.39	40.45	24.76
500.0	0.55	14.66	20.01	28.00	40.11	24.80
512.0	0.55	14.66	19.81	27.96	40.91	24.83
520.0	0.55	14.66	19.65	27.95	41.36	24.85
540.0	0.56	14.66	19.06	27.72	40.43	24.85
560.0	0.56	14.64	18.69	27.63	37.88	24.85
580.0	0.56	14.63	18.41	27.82	36.03	24.94
600.0	0.57	14.63	18.13	28.08	35.24	25.09
700.0	0.60	14.61	16.52	28.80	30.50	25.59
800.0	0.63	14.58	15.31	29.59	28.85	25.36
900.0	0.67	14.56	14.22	29.77	27.11	24.69
1000.0	0.72	14.54	13.28	28.23	24.90	24.62
1200.0	0.83	14.51	11.44	25.58	21.79	23.98
1400.0	1.02	14.58	9.30	23.15	19.23	23.07
1600.0	1.24	14.73	7.51	20.00	17.73	21.18
1800.0	1.56	14.89	5.40	17.67	16.78	19.74
2000.0	2.06	15.31	3.35	15.19	16.59	18.28
2200.0	2.70	16.02	1.52	13.09	17.20	16.89
2400.0	3.37	16.95	-0.10	11.61	18.71	16.12
2200.0	3.82	17.30	0.18	10.37	12.86	17.97

Directional Coupler

Typical Performance Curves

TRDC-ED12605/3

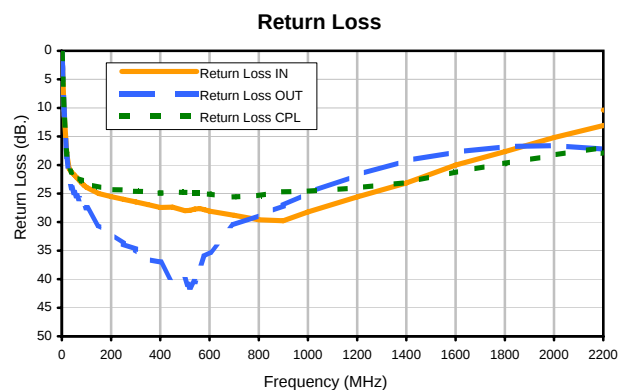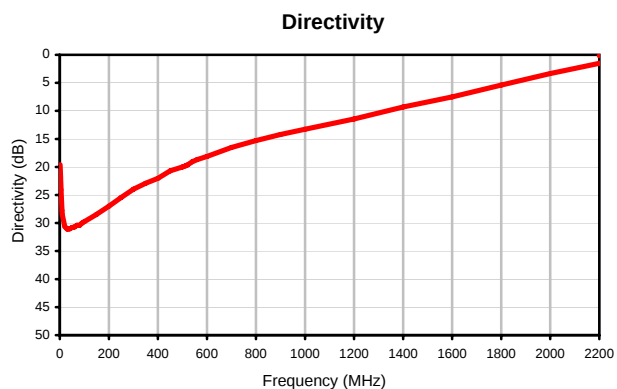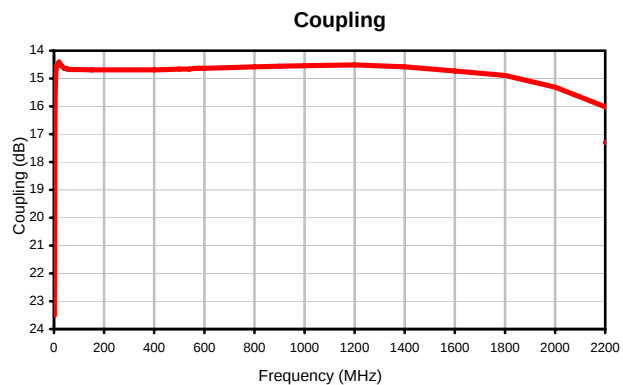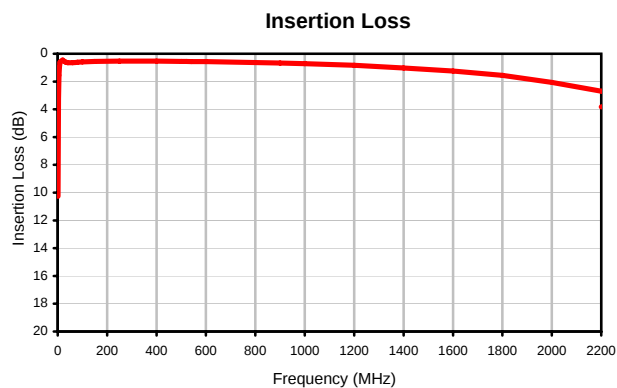



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215