



Mini-Circuits

LUMPED LC SURFACE MOUNT ^{top hat}

Low Pass Filter

ULP-470+

50Ω

DC to 470 MHz

KEY FEATURES


- Low Insertion Loss, 1.5 dB Typ.
- High Rejection, 37 dB Typ.
- Sharp Insertion Loss Roll-off
- Ultra Miniature Surface Mount Package

APPLICATIONS

- Wireless Communications
- Receivers / Transformers
- Lab Use


PRODUCT OVERVIEW

The ULP-470+ is a low pass filter in a top hat package (size of 0.25" x 0.25") fabricated using SMT technology. Covering DC to 470 MHz band width, these units offer good matching within the passband and high rejection. This model uses a miniature high Q capacitors and chip inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC - 470	—	1.5	2.0	dB
	Freq. Cut-Off	510	—	3.0	—	dB
	Return Loss	DC - 470	—	13.9	—	dB
Stopband	Rejection	650 - 780	20	27	—	dB
		780 - 2000	30	37	—	dB

1. Tested in Evaluation Board P/N TB-ULP-470+

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-40°C to + 85°C
Storage Temperature	-55°C to +100°C
Input Power ⁵	2 W max.

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

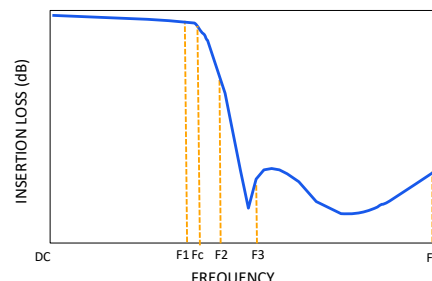

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. B
 ECO-025420
 ULP-470+
 EDU2397
 URJ
 250519

PAGE 1 OF 4



Mini-Circuits

LUMPED LC SURFACE MOUNT ^{top hat}





Low Pass Filter

ULP-470+

50Ω

DC to 470 MHz

TYPICAL PERFORMANCE GRAPHS

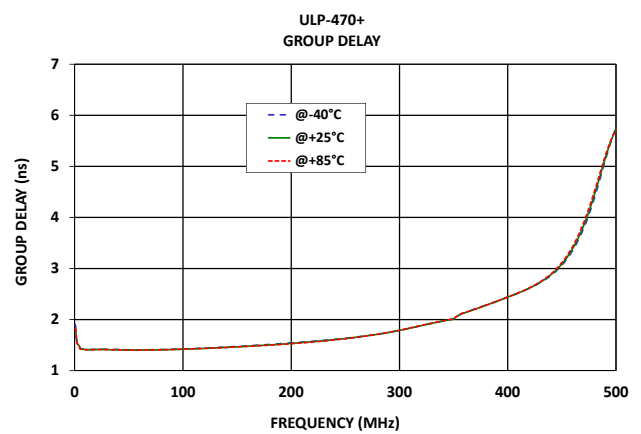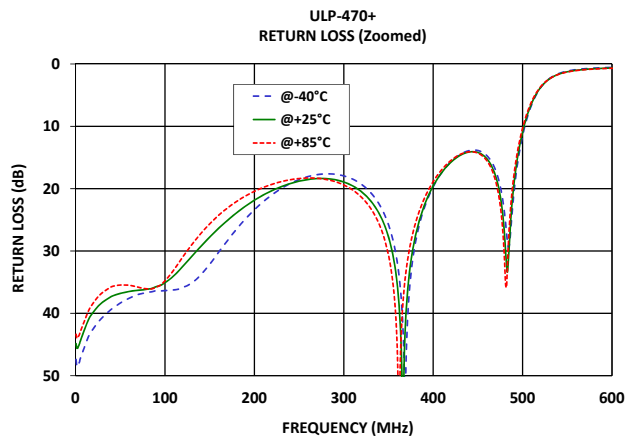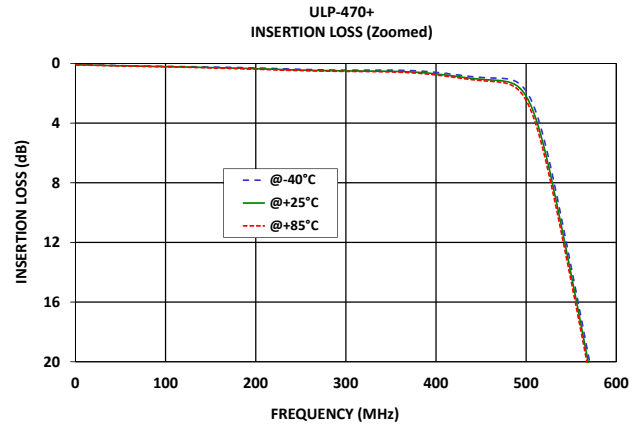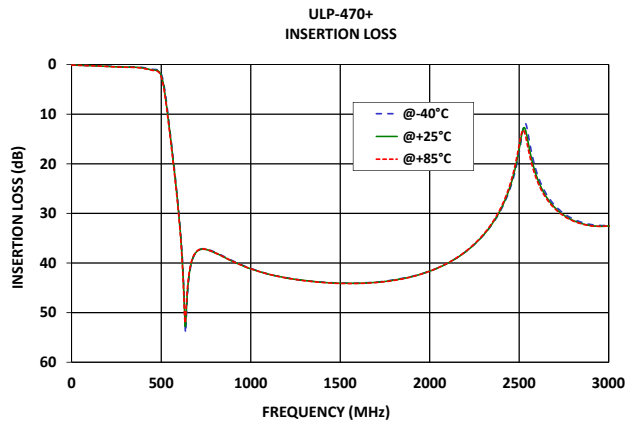



Mini-Circuits

LUMPED LC SURFACE MOUNT ^{top hat}

Low Pass Filter

ULP-470+

50Ω

DC to 470 MHz

FUNCTIONAL DIAGRAM





Figure 1. ULP-470+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF ₁ (Note 2)	1	Connects to RF Input Port
RF ₂ (Note 2)	3	Connects to RF Output Port
GROUND	2,4,5,6	Connects to Ground on PCB, (See drawing PL-484)
NC	—	No connection, not used internally. See drawing PL-484 for connection to PCB

SUGGESTED PCB LAYOUT (PL-484)

SUGGESTED MOUNTING CONFIGURATION FOR
QA2224 CASE STYLE "06FL09" PIN CODE

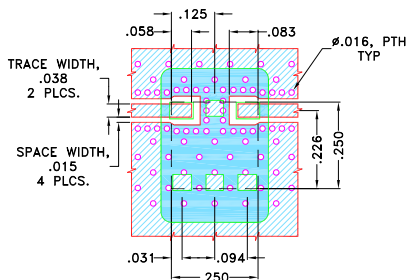


NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Figure 2. Suggested PCB Layout PL-484

CASE STYLE DRAWING

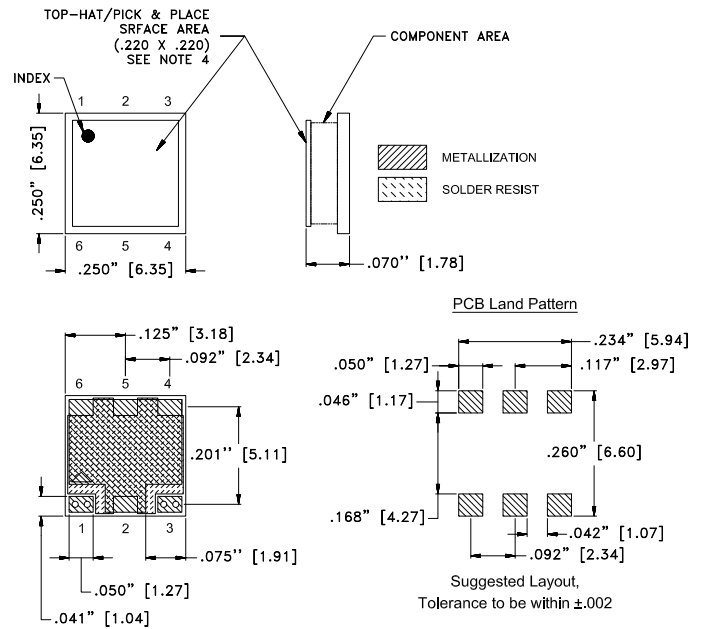

Weight: .25 gram

Dimensions are in inches (mm). Tolerances: 2PI. ± .03; 3PI. ± .015

PRODUCT MARKING*: ULP-470

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LUMPED LC SURFACE MOUNT ^{top hat}

Low Pass Filter

ULP-470+

50Ω

DC to 470 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	QA2224 Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	TR-F34
Suggested Layout for PCB Design	PL-484
Evaluation Board	TB-ULP-470+
	Gerber File
Environmental Rating	ENV03T2

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html









Typical Performance Data

FREQ.	INSERTION LOSS			INPUT RETURN LOSS			OUTPUT RETURN LOSS		
(MHz)	(dB)			(dB)			(dB)		
	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C
1	0.08	0.09	0.11	48.16	45.39	43.80	47.27	44.77	43.26
2	0.09	0.09	0.11	48.42	45.53	43.94	47.40	44.83	43.30
5	0.09	0.10	0.11	47.36	44.55	43.04	46.46	43.90	42.49
10	0.09	0.10	0.12	45.38	42.59	41.18	44.54	42.01	40.65
20	0.11	0.12	0.13	42.43	39.77	38.29	42.02	39.47	37.97
50	0.15	0.16	0.17	38.34	36.80	35.46	38.31	36.55	34.91
100	0.20	0.22	0.23	36.34	35.07	34.77	36.08	35.04	34.24
150	0.24	0.28	0.30	32.14	27.78	25.65	31.49	27.67	25.66
200	0.31	0.36	0.40	23.38	21.85	20.43	23.29	21.79	20.41
250	0.40	0.45	0.49	18.55	18.80	18.38	18.51	18.76	18.33
300	0.45	0.50	0.54	17.96	18.94	19.41	17.93	18.94	19.42
350	0.45	0.53	0.58	25.78	27.72	30.66	25.86	27.83	30.97
400	0.60	0.70	0.78	19.69	19.55	18.86	19.53	19.39	18.68
450	0.94	1.07	1.15	13.88	14.20	14.31	13.59	13.87	13.91
470	0.99	1.15	1.25	17.12	18.06	18.88	15.87	16.38	16.66
500	1.85	2.20	2.48	11.50	10.89	10.28	10.29	9.73	9.17
510	3.11	3.57	3.94	6.59	6.34	6.06	6.07	5.82	5.54
550	13.65	14.18	14.64	1.14	1.24	1.29	1.04	1.14	1.18
570	19.88	20.38	20.83	0.76	0.86	0.91	0.70	0.79	0.84
600	30.27	30.84	31.37	0.55	0.64	0.69	0.51	0.60	0.64
650	44.87	44.24	43.67	0.41	0.49	0.53	0.39	0.47	0.51
670	39.91	39.72	39.54	0.37	0.45	0.49	0.36	0.43	0.47
700	37.66	37.65	37.58	0.33	0.41	0.44	0.32	0.39	0.43
750	37.19	37.27	37.24	0.27	0.34	0.38	0.27	0.34	0.37
780	37.52	37.62	37.60	0.25	0.32	0.34	0.25	0.31	0.34
800	37.83	37.96	37.93	0.23	0.30	0.33	0.23	0.30	0.33
820	38.13	38.24	38.22	0.22	0.28	0.31	0.22	0.28	0.32
840	38.50	38.62	38.60	0.20	0.27	0.30	0.21	0.27	0.30
860	38.85	38.99	38.97	0.19	0.26	0.28	0.19	0.26	0.29
880	39.22	39.35	39.33	0.17	0.24	0.27	0.18	0.24	0.28
900	39.56	39.69	39.67	0.16	0.23	0.26	0.17	0.23	0.27
925	39.98	40.10	40.10	0.15	0.22	0.24	0.16	0.22	0.25
950	40.39	40.46	40.46	0.14	0.21	0.23	0.15	0.21	0.24
975	40.77	40.85	40.84	0.13	0.20	0.22	0.14	0.20	0.23
1000	41.09	41.16	41.16	0.11	0.19	0.21	0.13	0.19	0.22
1025	41.40	41.46	41.46	0.11	0.18	0.20	0.12	0.18	0.21
1050	41.72	41.73	41.75	0.10	0.17	0.20	0.11	0.17	0.21
1075	41.98	42.00	42.01	0.09	0.16	0.19	0.10	0.17	0.20
1100	42.24	42.26	42.25	0.08	0.16	0.18	0.09	0.16	0.19
1125	42.47	42.47	42.47	0.08	0.15	0.17	0.09	0.15	0.19
1150	42.66	42.64	42.67	0.07	0.15	0.17	0.08	0.15	0.18
1175	42.83	42.83	42.85	0.06	0.14	0.16	0.07	0.14	0.17
1200	42.99	43.02	43.04	0.06	0.14	0.16	0.07	0.14	0.17
1225	43.13	43.18	43.16	0.05	0.13	0.15	0.06	0.13	0.16
1250	43.28	43.29	43.31	0.05	0.13	0.15	0.06	0.13	0.16
1275	43.41	43.41	43.45	0.04	0.12	0.15	0.05	0.12	0.16
1300	43.52	43.51	43.58	0.04	0.12	0.14	0.05	0.12	0.15
1325	43.61	43.62	43.67	0.03	0.11	0.14	0.04	0.12	0.15
1350	43.72	43.72	43.76	0.03	0.11	0.14	0.04	0.12	0.15
1400	43.85	43.89	43.92	0.02	0.11	0.13	0.03	0.11	0.14
1450	43.95	44.01	44.04	0.02	0.11	0.13	0.03	0.10	0.14
1500	44.02	44.09	44.11	0.01	0.10	0.12	0.02	0.10	0.13
1550	44.06	44.07	44.14	0.01	0.10	0.12	0.02	0.10	0.13
1600	44.06	44.10	44.11	0.00	0.10	0.12	0.01	0.09	0.13
1650	43.97	44.01	44.06	0.00	0.10	0.12	0.01	0.09	0.13
1700	43.83	43.89	43.94	0.00	0.09	0.12	0.01	0.09	0.13
1750	43.63	43.71	43.76	0.00	0.09	0.12	0.00	0.09	0.13
1800	43.38	43.47	43.51	0.00	0.09	0.12	0.00	0.09	0.13
1900	42.71	42.75	42.78	0.00	0.10	0.13	0.00	0.09	0.13
2000	41.61	41.63	41.64	0.00	0.10	0.13	0.00	0.09	0.13


Typical Performance Data

FREQ. (MHz)	GROUP DELAY		
	(nsec)		
	@-40°C	@+25°C	@+85°C
1	1.83	1.77	1.77
2	1.58	1.56	1.55
3	1.53	1.52	1.51
4	1.50	1.49	1.48
5	1.44	1.43	1.43
10	1.42	1.41	1.41
15	1.42	1.41	1.41
20	1.42	1.42	1.41
25	1.42	1.42	1.41
30	1.42	1.41	1.41
40	1.41	1.41	1.41
50	1.41	1.40	1.40
60	1.41	1.40	1.40
70	1.41	1.41	1.40
80	1.41	1.41	1.41
90	1.42	1.41	1.41
100	1.43	1.42	1.42
110	1.43	1.43	1.43
120	1.44	1.44	1.44
130	1.45	1.45	1.44
140	1.46	1.46	1.45
150	1.47	1.47	1.46
160	1.49	1.48	1.48
170	1.50	1.49	1.49
180	1.51	1.50	1.50
190	1.53	1.52	1.51
200	1.54	1.53	1.53
210	1.56	1.55	1.54
220	1.58	1.57	1.56
230	1.59	1.59	1.58
240	1.61	1.61	1.60
250	1.63	1.63	1.62
260	1.66	1.65	1.65
270	1.68	1.68	1.68
280	1.71	1.71	1.71
290	1.75	1.75	1.75
300	1.79	1.79	1.79
310	1.83	1.83	1.84
320	1.88	1.88	1.89
330	1.93	1.93	1.93
340	1.97	1.97	1.98
350	2.01	2.01	2.02
360	2.13	2.13	2.13
370	2.21	2.20	2.21
380	2.29	2.28	2.28
390	2.36	2.36	2.36
400	2.44	2.44	2.44
405	2.48	2.48	2.48
410	2.52	2.52	2.53
415	2.57	2.57	2.57
420	2.61	2.62	2.62
425	2.67	2.67	2.68
430	2.72	2.73	2.74
435	2.79	2.80	2.81
440	2.86	2.88	2.89
445	2.95	2.97	3.00
450	3.06	3.09	3.11
455	3.20	3.23	3.26
460	3.35	3.39	3.43
470	3.78	3.83	3.89

Typical Performance Curves

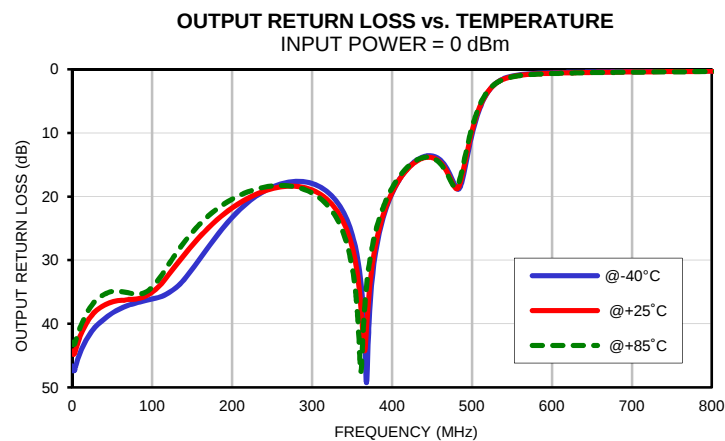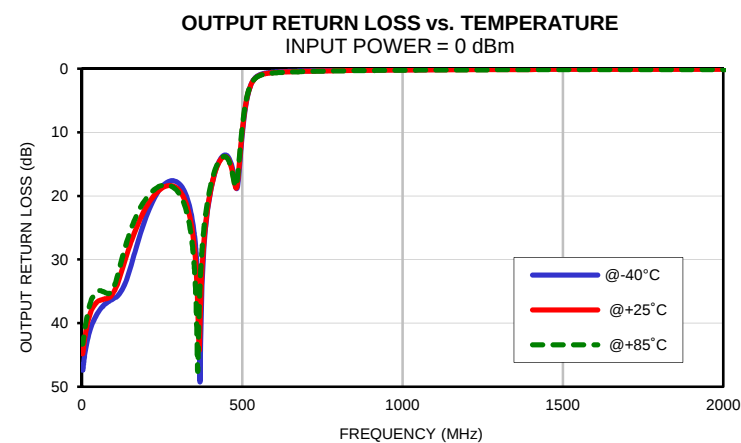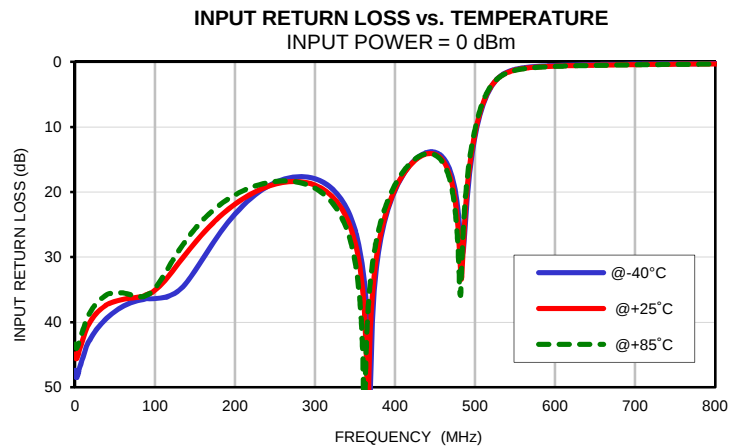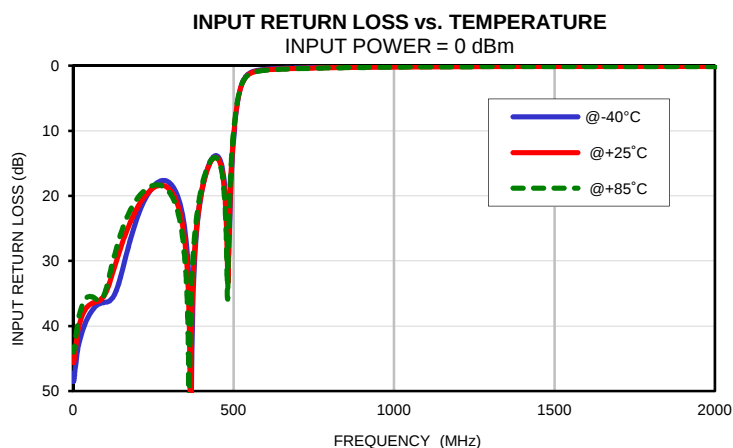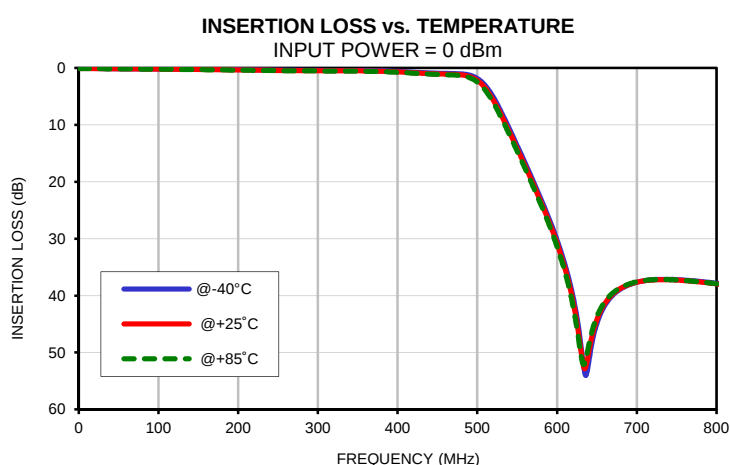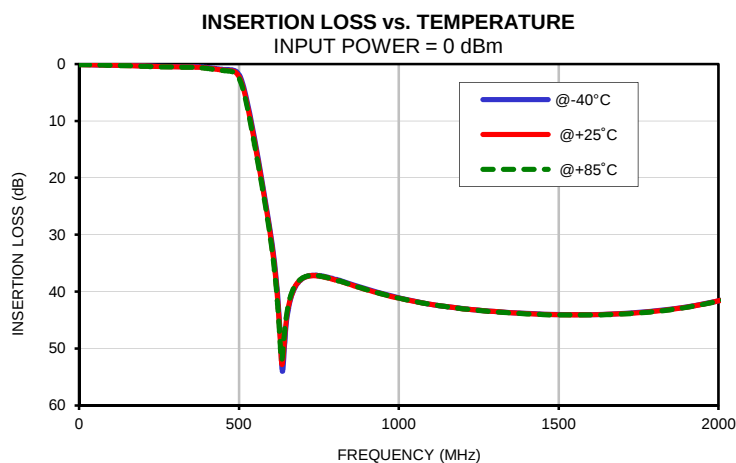


Typical Performance Curves

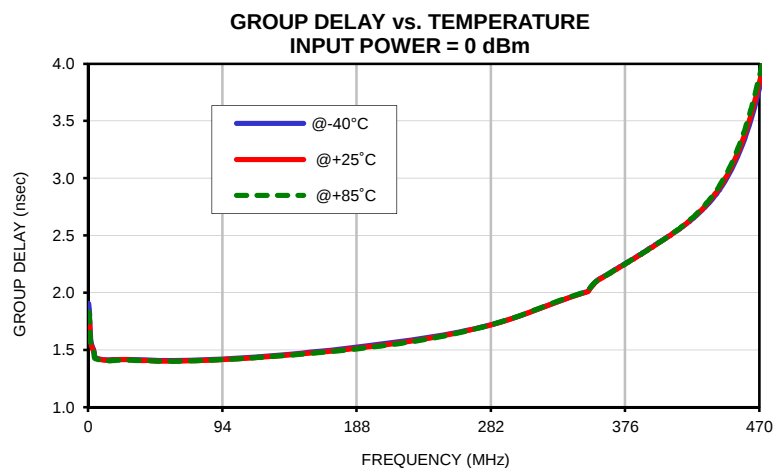


Outline Dimensions

QA2224

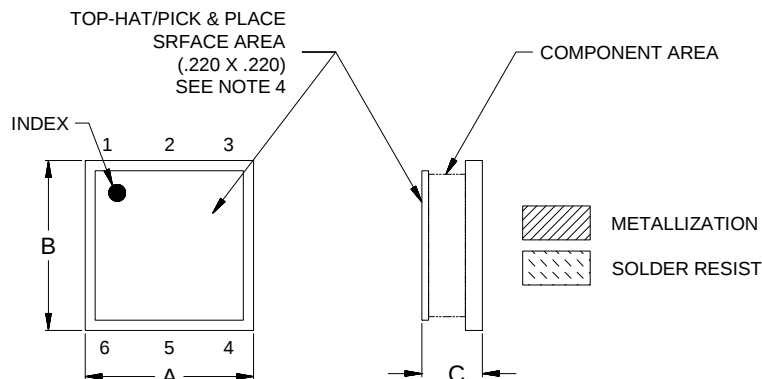

PCB Land Pattern

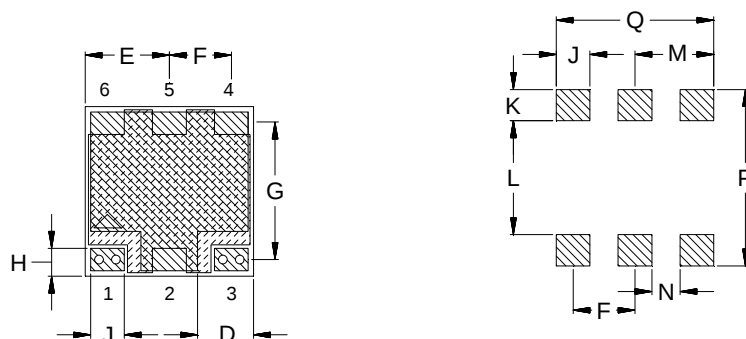

Suggested Layout,
Tolerance to be within $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	M
QA2224	.250 (6.35)	.250 (6.35)	.070 (1.78)	.075 (1.91)	.125 (3.18)	.092 (2.34)	.201 (5.11)	.041 (1.04)	.050 (1.27)	.046 (1.17)	.168 (4.27)	.117 (2.97)

CASE#	N	P	Q	WT. GRAM
QA2224	.042 (1.07)	.260 (6.60)	.234 (5.94)	0.25

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Ceramic base.
- Base: Printed wiring laminate.
- Termination finish:
For RoHS Case Styles: 3-5 μ inch Gold over 120-240 μ inch Nickel plate.
For RoHS-5 Case Styles: Tin-Lead plate.
- Top-Hat total thickness: .013 inches MAX




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F34

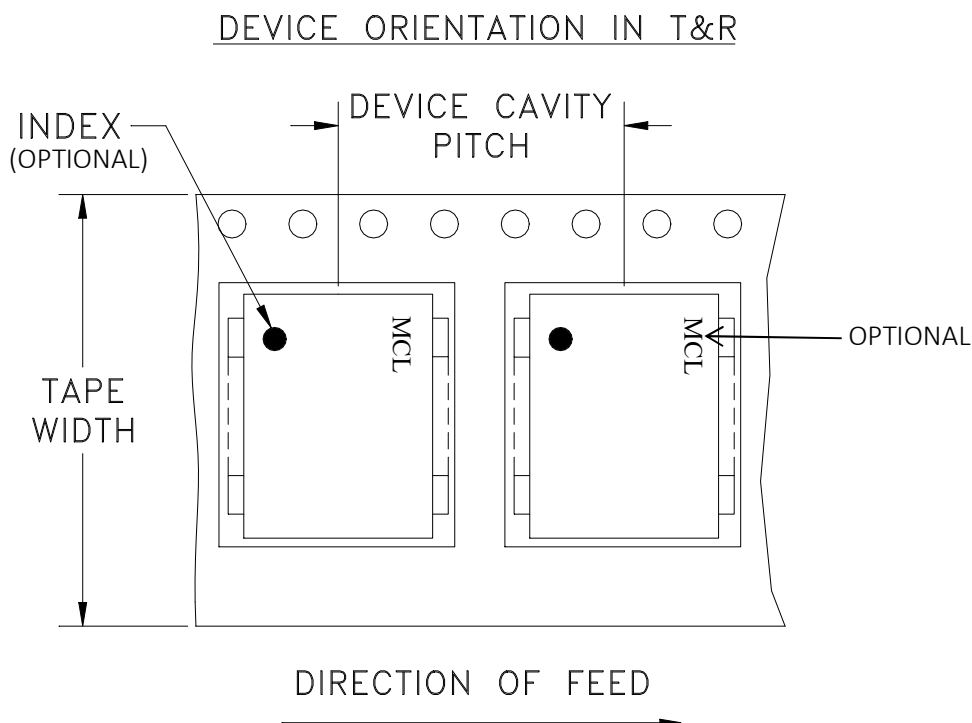

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

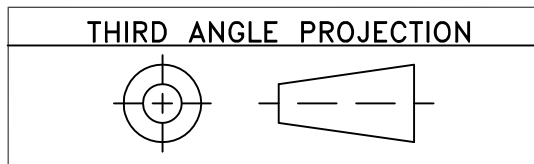

REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M156213	NEW RELEASE	MAY 16	TM	MD
A	M161508	COPPER LAND PATTERN UPDATED	APR 17	EJ	MD

SUGGESTED MOUNTING CONFIGURATION FOR
QA2224 CASE STYLE "06FL09" PIN CODE

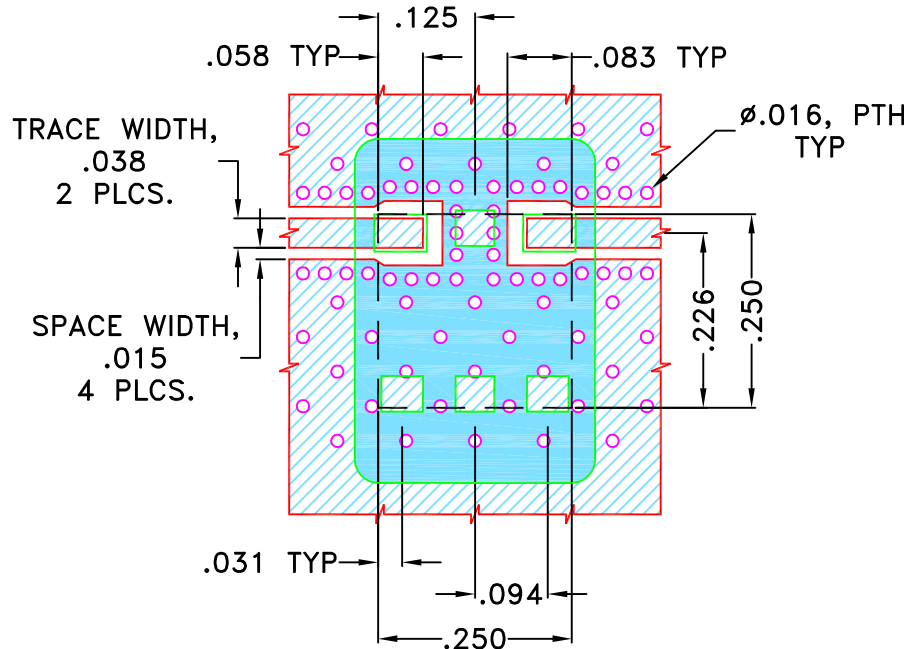

NOTES:



1. TRACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS		DATE	
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005" ANGLES ± FRACTIONS ±	DRAWN	TM		02 MAY 16	
	CHECKED	MD		02 MAY 16	
	APPROVED	MD		02 MAY 16	
 Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235					
PL, 06FL09, QA2224, ULP, TB-894+, 50 Ohm					
SIZE A		CODE IDENT 15542		DRAWING NO: 98-PL-484	
FILE: 98PL484		SCALE: 4:1		REV: A	
SHEET: 1 OF 1		ASHEETA1.DWG REV:A DATE:01/12/95			

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

Evaluation Board and Circuit

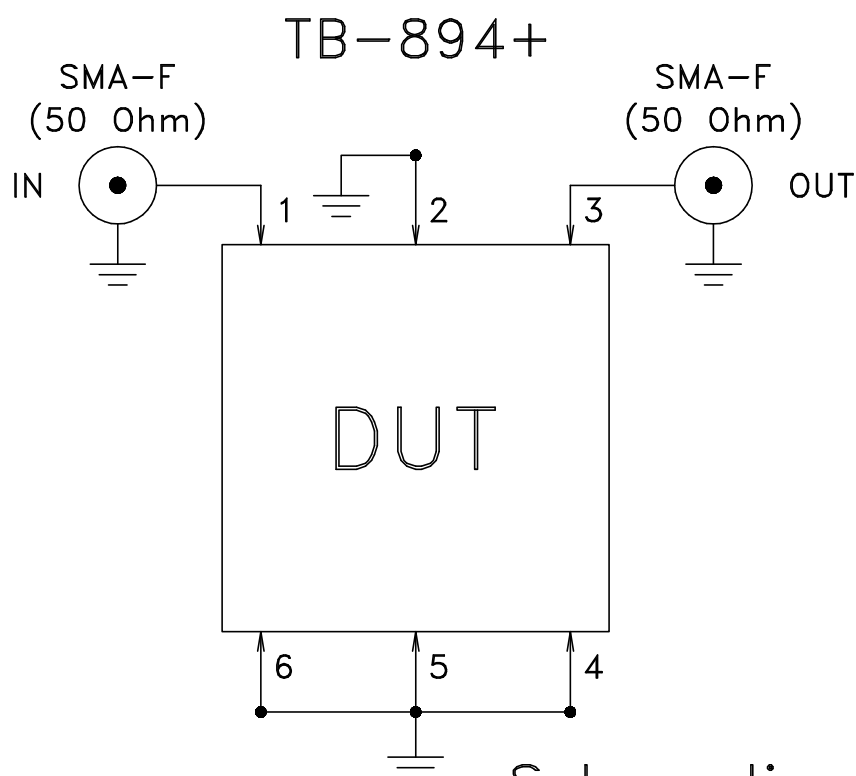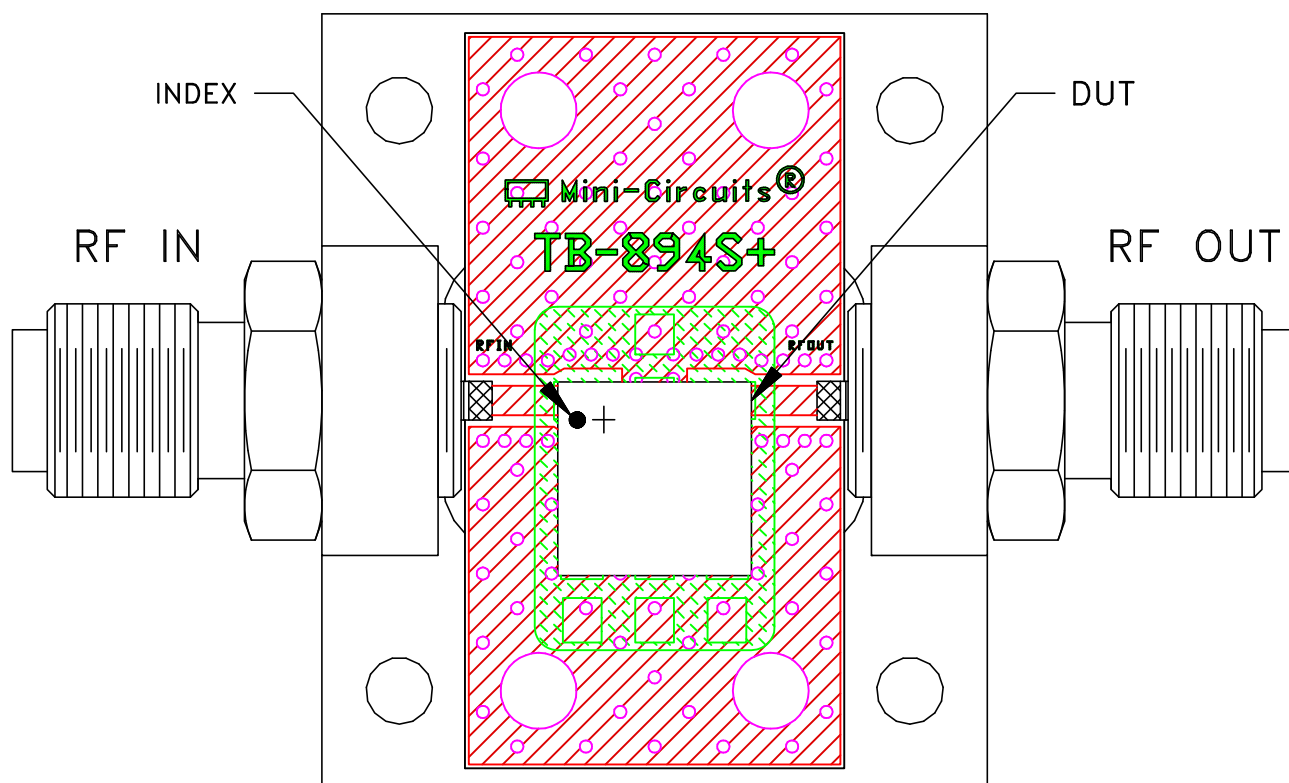

NOTES:

1. 50 Ohm SMA Female connectors.
2. PCB Material: ROGERS (RO4350B) OR Equivalent
Dielectric Constant= $3.48 \pm .05$, Thickness= $.020$ inch.

Schematic Diagram

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
HAST	130°C, 85% RH, 96 hours	JESD22-A110
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutectic Process: 225°C peak Pb-Free Process, 245°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 20-2000 Hz, 4 times in each of three axes (total 12)	MIL-STD-883, Method 2007.3, Condition A
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215