

Coaxial

Low Pass Filter

50Ω

*DC to 2850 MHz

NON-CATALOG

VLF-2850



CASE STYLE: FF704

Connectors	Model
SMA	VLF-2850

Price: Contact Sales Dept.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W max. at 25°C
DC Current Input to Output	0.5A max. at 25°C

* Passband rating, derate linearly to 3.5W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Features

- rugged uni-body construction, small size
- 7 sections
- excellent power handling, 10W
- temperature stable
- low cost
- protected by U.S. Patent 6,943,646

Applications


- harmonic rejection
- transmitters/receivers
- lab use

Electrical Specifications at 25°C

PASSBAND (MHz)	fco, MHz Nom.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
(loss < 1.5 dB)	(loss 3 dB)	f 20	30	fr 20	Stopband	Passband	
Max.	Typ.	Min.	Typ.	Typ.	Typ.	Typ.	
*DC-2800	3300	4000	4200-7400	9000	20	1.2	7

* Not for use with DC voltage at input and output ports


Outline Drawing

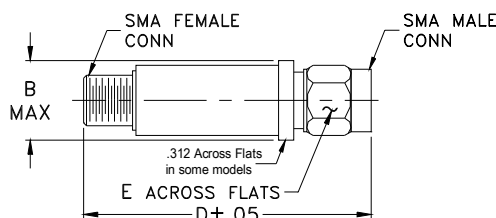


Outline Dimensions (inch)

B	D	E	gra
.410	1.43	.312	1
10.41	36.32	7.92	

typical frequency response





electrical schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.09	1.03
100	0.10	1.02
1000	0.29	1.09
2000	0.52	1.26
2500	0.64	1.18
2850	0.81	1.13
3300	3.09	3.00
3900	24.62	23.18
4000	30.09	25.19
4200	44.37	28.49
5000	41.19	34.75
6140	47.87	44.55
7400	28.61	54.29
8500	24.29	52.65
9000	22.82	48.26

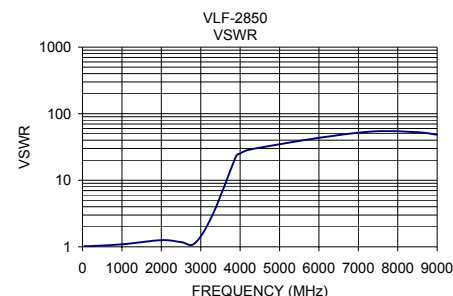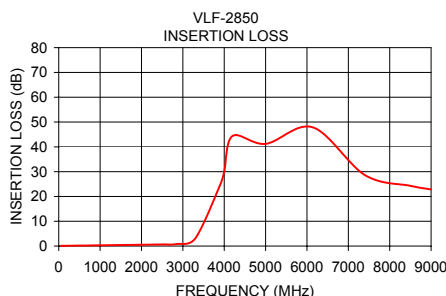

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
M151777
VLF-2850
EDR-6783/1
AD/TD/CP/AM
150714
Page 1 of 1

Coaxial Low Pass Filter

VLF-2850

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS @ +25° C (dB)	INPUT RETURN LOSS @ +25° C (dB)	OUTPUT RETURNLOSS @ +25° C (dB)
50	0.09	36.81	37.25
100	0.10	39.79	39.08
500	0.20	41.24	32.41
1000	0.29	27.26	24.46
1500	0.41	21.13	20.48
2000	0.52	18.88	19.17
2500	0.64	21.73	21.44
2850	0.81	24.21	23.11
2920	0.89	21.43	20.81
3285	2.87	6.45	6.58
3300	3.09	6.01	6.16
3395	4.91	3.79	3.96
3565	10.03	1.68	1.89
3695	15.12	1.08	1.30
3805	19.99	0.87	1.09
3900	24.62	0.75	1.01
3985	29.23	0.70	0.97
4000	30.09	0.69	0.96
4050	33.14	0.68	0.93
4115	37.54	0.63	0.93
4150	40.18	0.63	0.92
4200	44.37	0.61	0.90
4680	48.29	0.50	0.84
4850	43.35	0.49	0.82
5000	41.19	0.50	0.78
5500	41.75	0.45	0.65
6140	47.87	0.39	0.50
6500	37.71	0.36	0.45
7400	28.61	0.32	0.41
8500	24.29	0.33	0.45
9000	22.82	0.36	0.46
9500	21.40	0.34	0.46
10000	20.12	0.37	0.47
11000	17.31	0.46	0.51
11580	15.58	0.49	0.49
12000	14.34	0.61	0.55
13000	11.05	1.12	0.95
13600	9.38	1.87	1.33
14000	10.64	6.31	1.47
16000	14.57	0.93	0.92

REV. X1

VLF-2850

071009

Page 1 of 1



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



Patent Pending




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Coaxial Low Pass Filter

Typical Performance Curves

VLF-2850

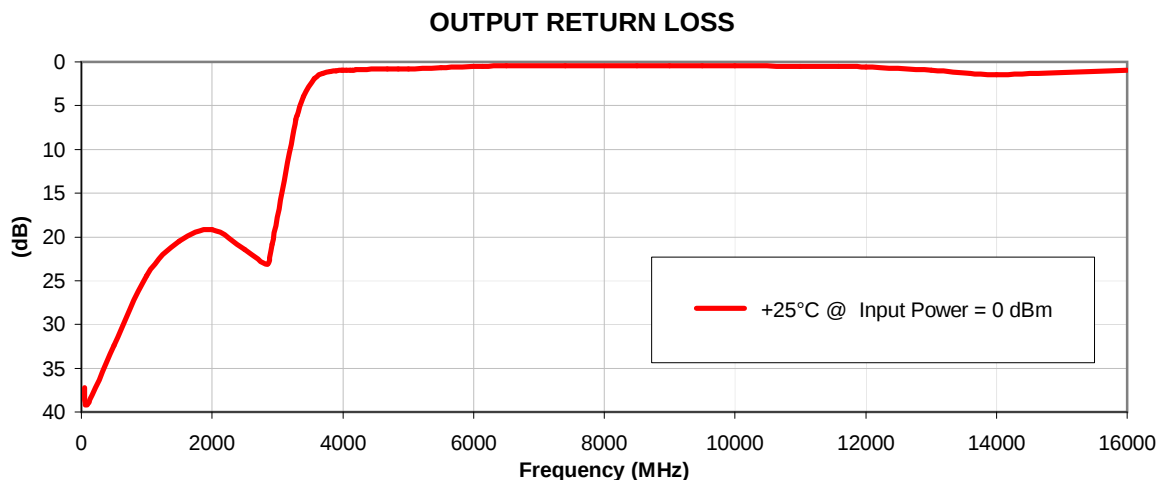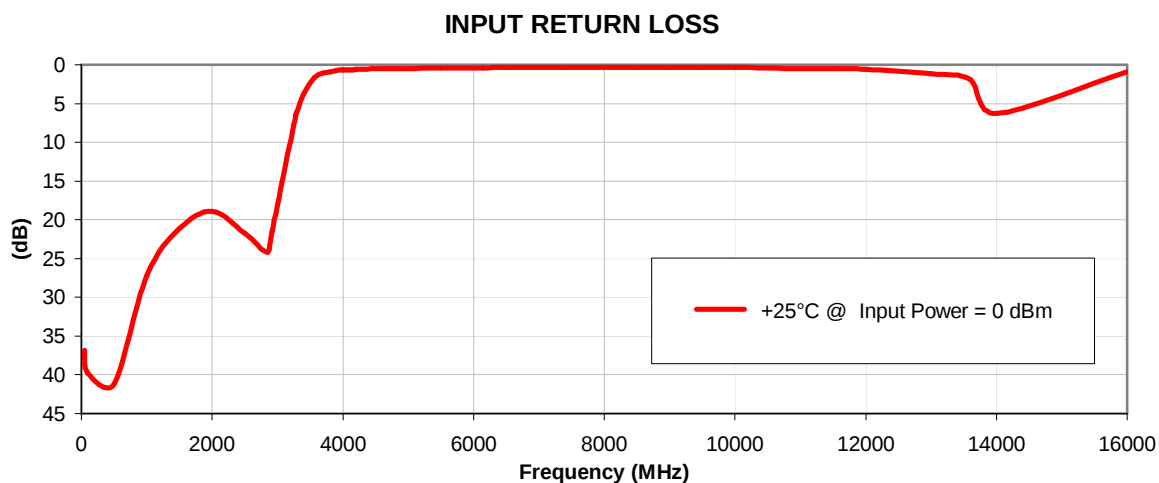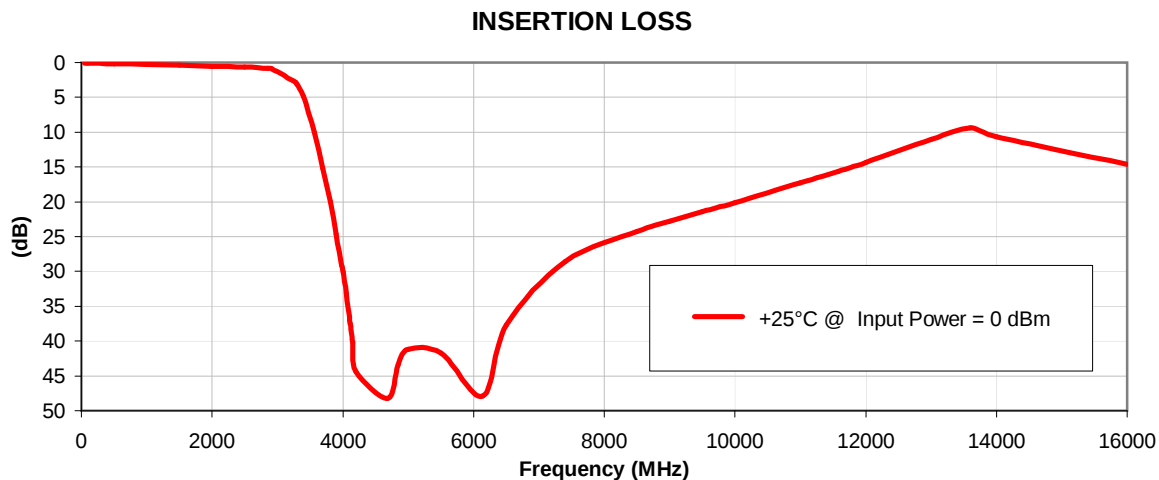

REV. X1
VLF-2850
071009
Page 1 of 1



Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Outline Dimensions



CASE #.	A	B	C	D	E	WT GRAMS
FF704	--	.410 (10.41)	--	1.43 (36.32)	.312 (7.92)	10.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .04; 3Pl. ± .030

Notes:

1. Case material: Stainless steel.
2. Case finish: Gold plated.
3. Round Flange may have .312 Across Flats in some models.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I