

# Coaxial Low Pass Filter

## VLFG-4800+

50Ω

DC to 4800 MHz



Generic photo used for illustration purposes only

CASE STYLE: FF704

## The Big Deal

- Excellent power handling, 4.5W
- Temperature stable
- Rugged unibody construction
- Good rejection, 42 dB typical

## Product Overview

VLFG-4800+ is a 50Ω low pass filter built in rugged unibody construction. Covering DC-4800 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VLFG-4800+ offer low insertion loss, and excellent power handling capability. It handles up to 4.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

## Key Features

| Feature                     | Advantages                                                                                         |
|-----------------------------|----------------------------------------------------------------------------------------------------|
| Low passband insertion loss | Suitable for high performance application.                                                         |
| 4.5W Power handling         | Supports a range of system power requirements.                                                     |
| Connectorized package       | The connectorized package is easy to interface with other devices and well suited for test setups. |

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Low Pass Filter

50Ω

DC to 4800 MHz

VLFG-4800+



Generic photo used for illustration purposes only  
CASE STYLE: FF704

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Features

- Low loss, 1.2dB typ.
- Very good rejection 42dB typ.
- Excellent power handling, 4.5W
- Temperature stable
- Connectorized package
- Rugged unibody construction

## Applications

- Military radar applications
- Test and measurement
- 5G Sub 6 Telecom
- Telecommunications and broadband wireless applications

## Functional Schematic

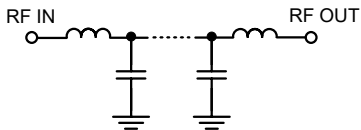

## Electrical Specifications at 25°C

| Parameter | F#             | Frequency (MHz) | Min. | Typ. | Max. | Unit |
|-----------|----------------|-----------------|------|------|------|------|
| Pass Band | Insertion Loss | DC - F1         | —    | 1.2  | 1.7  | dB   |
|           | Freq. Cut-Off  | F2*             | —    | 3.0  | —    | dB   |
|           | Return Loss    | DC - F1         | —    | 12   | —    | dB   |
| Stop Band | Rejection Loss | F3-F4           | 20   | 34   | —    | dB   |
|           |                | F4-F5           | 30   | 42   | —    | dB   |
|           |                | F5-F6           | 22   | 29   | —    | dB   |
|           |                | F6-F7           | —    | 20   | —    | dB   |

In Application where DC voltage is present at either input or output port, DC blocks are required.

\* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

## Maximum Ratings

|                       |                 |
|-----------------------|-----------------|
| Operating Temperature | -55°C to 125°C  |
| Storage Temperature   | -55°C to 125°C  |
| RF Power Input*       | 4.5W max. @25°C |





\*Passband rating, derate linearly to 1W at 125°C ambient

Permanent damage may occur if any of these limits are exceeded.

## Typical Performance Data at 25°C

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) |
|-----------------|---------------------|------------------|
| 10              | 0.05                | 47.15            |
| 100             | 0.08                | 40.87            |
| 500             | 0.17                | 38.79            |
| 1000            | 0.24                | 46.18            |
| 1500            | 0.31                | 30.74            |
| 2000            | 0.38                | 23.83            |
| 3000            | 0.58                | 17.73            |
| 4800            | 1.14                | 21.02            |
| 5460            | 2.98                | 10.25            |
| 5600            | 5.20                | 5.83             |
| 6040            | 20.15               | 1.79             |
| 6280            | 30.23               | 1.39             |
| 6700            | 50.63               | 1.01             |
| 7200            | 76.03               | 0.74             |
| 8000            | 61.34               | 0.54             |
| 9300            | 45.35               | 0.55             |
| 11000           | 36.94               | 0.50             |
| 12500           | 31.70               | 0.55             |
| 15000           | 31.91               | 1.22             |
| 18000           | 27.39               | 0.91             |

## Typical Frequency Response

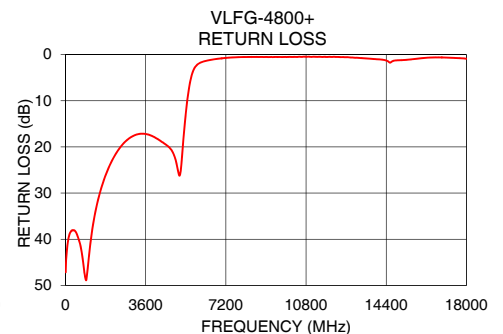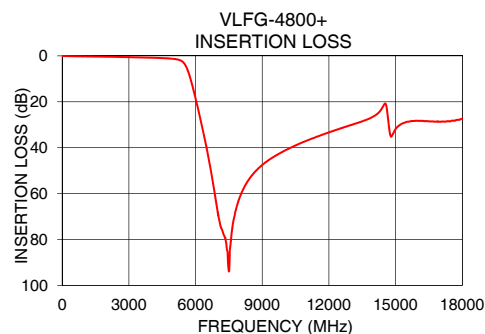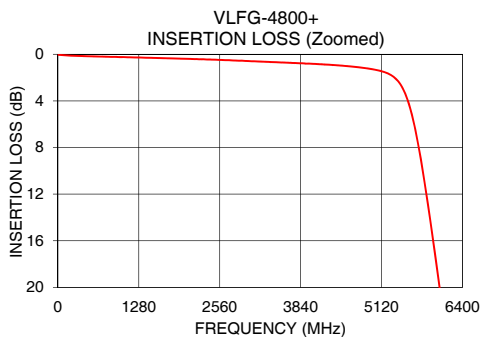

## Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



Coaxial Connections

|          |            |
|----------|------------|
| PORT - 1 | SMA-Male   |
| PORT - 2 | SMA-Female |

Outline Drawing

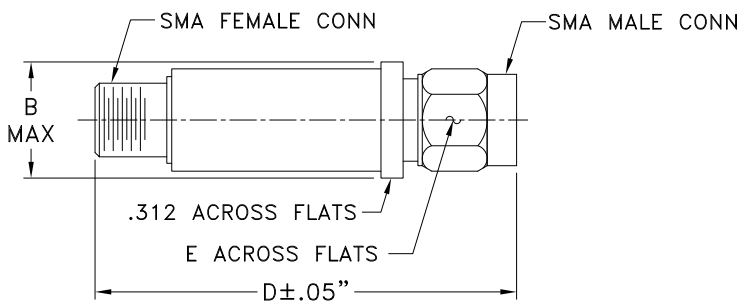

Outline Dimensions ( inch mm )

| B     | D     | E    | wt.   |
|-------|-------|------|-------|
| .410  | 1.43  | .312 | grams |
| 10.41 | 36.32 | 7.92 | 10    |

Note: Please refer to case style drawing for details

Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Typical Performance Data

| FREQ. | INSERTION LOSS |        |         | INPUT RETURN LOSS |        |         | OUTPUT RETURN LOSS |        |         |
|-------|----------------|--------|---------|-------------------|--------|---------|--------------------|--------|---------|
| (MHz) | (dB)           |        |         | (dB)              |        |         | (dB)               |        |         |
|       | @-55°C         | @+25°C | @+125°C | @-55°C            | @+25°C | @+125°C | @-55°C             | @+25°C | @+125°C |
| 10    | 0.05           | 0.05   | 0.07    | 59.63             | 47.28  | 49.12   | 48.00              | 53.62  | 44.39   |
| 100   | 0.04           | 0.05   | 0.07    | 54.02             | 48.27  | 45.82   | 50.80              | 46.04  | 43.37   |
| 200   | 0.04           | 0.06   | 0.08    | 40.87             | 40.93  | 40.98   | 39.17              | 39.19  | 38.58   |
| 250   | 0.04           | 0.06   | 0.09    | 40.27             | 42.01  | 42.52   | 37.96              | 38.88  | 38.74   |
| 300   | 0.05           | 0.07   | 0.10    | 37.72             | 39.04  | 39.12   | 35.20              | 36.26  | 36.58   |
| 350   | 0.05           | 0.08   | 0.11    | 36.54             | 38.41  | 39.07   | 34.46              | 35.15  | 35.19   |
| 400   | 0.05           | 0.08   | 0.12    | 37.81             | 38.96  | 39.29   | 34.46              | 34.67  | 34.89   |
| 500   | 0.06           | 0.09   | 0.13    | 37.51             | 39.07  | 40.51   | 33.57              | 33.15  | 32.90   |
| 550   | 0.06           | 0.10   | 0.14    | 37.02             | 38.59  | 39.72   | 32.84              | 32.53  | 32.27   |
| 600   | 0.06           | 0.10   | 0.15    | 37.14             | 39.52  | 42.02   | 32.31              | 31.98  | 31.67   |
| 650   | 0.07           | 0.11   | 0.15    | 38.82             | 41.81  | 44.11   | 32.40              | 32.25  | 31.90   |
| 700   | 0.07           | 0.11   | 0.16    | 38.18             | 41.28  | 44.33   | 31.68              | 31.52  | 31.26   |
| 750   | 0.07           | 0.12   | 0.17    | 39.12             | 43.36  | 48.11   | 31.86              | 31.61  | 31.36   |
| 780   | 0.08           | 0.12   | 0.18    | 38.94             | 42.93  | 46.13   | 31.47              | 31.26  | 31.09   |
| 800   | 0.08           | 0.13   | 0.18    | 38.35             | 42.08  | 45.62   | 30.98              | 30.81  | 30.63   |
| 820   | 0.08           | 0.13   | 0.18    | 37.96             | 41.78  | 46.90   | 30.73              | 30.49  | 30.33   |
| 850   | 0.09           | 0.13   | 0.19    | 38.15             | 42.59  | 51.88   | 30.70              | 30.37  | 30.17   |
| 900   | 0.09           | 0.14   | 0.20    | 39.29             | 44.47  | 63.65   | 30.31              | 30.01  | 29.77   |
| 920   | 0.09           | 0.14   | 0.20    | 38.76             | 43.45  | 58.19   | 30.00              | 29.64  | 29.43   |
| 960   | 0.10           | 0.15   | 0.21    | 37.64             | 41.55  | 49.13   | 29.81              | 29.36  | 29.11   |
| 1000  | 0.10           | 0.15   | 0.21    | 37.62             | 41.14  | 45.96   | 29.76              | 29.34  | 29.05   |
| 1020  | 0.10           | 0.15   | 0.22    | 37.57             | 41.07  | 45.41   | 29.51              | 29.10  | 28.85   |
| 1050  | 0.10           | 0.15   | 0.22    | 36.77             | 40.00  | 44.14   | 29.05              | 28.65  | 28.46   |
| 1090  | 0.10           | 0.16   | 0.22    | 35.59             | 37.93  | 41.02   | 28.86              | 28.54  | 28.30   |
| 1150  | 0.11           | 0.17   | 0.24    | 35.29             | 37.38  | 40.00   | 28.00              | 27.75  | 27.59   |
| 1200  | 0.12           | 0.18   | 0.24    | 33.74             | 35.31  | 37.56   | 27.69              | 27.39  | 27.22   |
| 1250  | 0.12           | 0.18   | 0.25    | 32.75             | 34.03  | 35.86   | 27.47              | 27.26  | 27.10   |
| 1400  | 0.13           | 0.19   | 0.27    | 28.86             | 29.98  | 30.94   | 25.91              | 25.91  | 25.73   |
| 1500  | 0.14           | 0.21   | 0.28    | 26.63             | 27.48  | 28.17   | 25.13              | 25.12  | 24.88   |
| 1550  | 0.14           | 0.21   | 0.29    | 26.02             | 26.78  | 27.38   | 24.70              | 24.63  | 24.39   |
| 4800  | 0.86           | 1.04   | 1.27    | 14.00             | 14.51  | 14.99   | 14.61              | 15.17  | 15.67   |
| 4900  | 0.91           | 1.09   | 1.34    | 14.31             | 14.99  | 15.77   | 14.83              | 15.51  | 16.27   |
| 5000  | 0.95           | 1.15   | 1.42    | 15.01             | 15.92  | 17.11   | 15.62              | 16.52  | 17.68   |
| 5440  | 1.63           | 2.05   | 2.67    | 16.48             | 15.44  | 14.08   | 19.18              | 17.18  | 14.89   |
| 5500  | 1.94           | 2.45   | 3.20    | 14.09             | 13.13  | 11.96   | 15.00              | 13.46  | 11.69   |
| 5600  | 2.77           | 3.50   | 4.56    | 10.35             | 9.63   | 8.82    | 10.01              | 8.90   | 7.65    |
| 6000  | 12.72          | 14.59  | 16.82   | 2.37              | 2.43   | 2.54    | 1.53               | 1.49   | 1.47    |
| 6100  | 16.68          | 18.66  | 20.97   | 1.75              | 1.87   | 2.01    | 1.07               | 1.11   | 1.15    |
| 6200  | 20.87          | 22.91  | 25.24   | 1.34              | 1.49   | 1.63    | 0.82               | 0.90   | 0.96    |
| 6400  | 29.51          | 31.57  | 33.88   | 0.82              | 0.98   | 1.12    | 0.57               | 0.67   | 0.75    |
| 6700  | 42.43          | 44.34  | 46.36   | 0.46              | 0.62   | 0.74    | 0.37               | 0.47   | 0.57    |
| 7000  | 52.55          | 53.46  | 54.14   | 0.26              | 0.42   | 0.54    | 0.26               | 0.37   | 0.48    |
| 7200  | 55.05          | 55.16  | 55.05   | 0.18              | 0.34   | 0.46    | 0.20               | 0.31   | 0.44    |
| 7500  | 53.71          | 53.58  | 53.52   | 0.12              | 0.28   | 0.41    | 0.14               | 0.26   | 0.41    |
| 7800  | 52.73          | 52.71  | 52.80   | 0.07              | 0.24   | 0.39    | 0.13               | 0.27   | 0.46    |
| 8000  | 52.26          | 52.47  | 52.37   | 0.04              | 0.22   | 0.39    | 0.15               | 0.30   | 0.50    |
| 8100  | 51.95          | 52.28  | 52.31   | 0.05              | 0.22   | 0.40    | 0.14               | 0.29   | 0.50    |
| 8200  | 51.62          | 51.85  | 51.82   | 0.05              | 0.23   | 0.42    | 0.15               | 0.30   | 0.51    |
| 8300  | 51.76          | 51.87  | 52.22   | 0.05              | 0.23   | 0.43    | 0.15               | 0.31   | 0.53    |
| 8400  | 52.12          | 52.51  | 52.88   | 0.04              | 0.23   | 0.44    | 0.14               | 0.30   | 0.54    |
| 8500  | 52.06          | 52.40  | 52.64   | 0.03              | 0.22   | 0.44    | 0.15               | 0.30   | 0.54    |
| 8600  | 50.92          | 51.14  | 51.14   | 0.02              | 0.22   | 0.44    | 0.16               | 0.32   | 0.57    |
| 8700  | 51.09          | 51.25  | 51.33   | 0.00              | 0.21   | 0.45    | 0.13               | 0.30   | 0.59    |
| 9000  | 51.38          | 51.74  | 51.72   | 0.02              | 0.23   | 0.51    | 0.15               | 0.33   | 0.61    |
| 9300  | 49.05          | 48.53  | 48.39   | 0.05              | 0.28   | 0.58    | 0.20               | 0.37   | 0.66    |
| 10000 | 45.20          | 44.92  | 44.82   | 0.07              | 0.31   | 0.69    | 0.25               | 0.41   | 0.69    |
| 12500 | 30.14          | 30.32  | 30.43   | 0.22              | 0.46   | 0.67    | 0.10               | 0.21   | 0.31    |
| 15000 | 29.08          | 30.60  | 30.18   | 0.48              | 0.40   | 0.57    | 0.11               | 0.08   | 0.42    |
| 16000 | 28.39          | 28.41  | 28.48   | 0.11              | 0.20   | 0.66    | 0.13               | 0.12   | 0.54    |
| 18000 | 23.79          | 23.66  | 23.88   | 0.19              | 0.22   | 0.84    | 0.06               | 0.23   | 0.64    |






\* Temperature test data was based on the underlying chip

*Typical Performance Data*

| FREQ. | GROUP DELAY |        |         |
|-------|-------------|--------|---------|
| (MHz) | (nsec)      |        |         |
|       | @-55°C      | @+25°C | @+125°C |
| 10    | 0.12        | 0.15   | 0.13    |
| 50    | 0.12        | 0.14   | 0.13    |
| 100   | 0.13        | 0.13   | 0.13    |
| 200   | 0.13        | 0.13   | 0.13    |
| 300   | 0.13        | 0.13   | 0.13    |
| 400   | 0.13        | 0.13   | 0.13    |
| 500   | 0.13        | 0.13   | 0.13    |
| 600   | 0.13        | 0.13   | 0.13    |
| 700   | 0.13        | 0.13   | 0.13    |
| 800   | 0.13        | 0.13   | 0.13    |
| 900   | 0.13        | 0.13   | 0.13    |
| 1000  | 0.13        | 0.13   | 0.13    |
| 1100  | 0.13        | 0.13   | 0.13    |
| 1200  | 0.13        | 0.13   | 0.13    |
| 1300  | 0.13        | 0.13   | 0.13    |
| 1400  | 0.13        | 0.13   | 0.14    |
| 1500  | 0.13        | 0.13   | 0.14    |
| 1600  | 0.13        | 0.13   | 0.14    |
| 1700  | 0.13        | 0.14   | 0.14    |
| 1800  | 0.14        | 0.14   | 0.14    |
| 1900  | 0.14        | 0.14   | 0.14    |
| 2000  | 0.14        | 0.14   | 0.14    |
| 2100  | 0.14        | 0.14   | 0.14    |
| 2200  | 0.14        | 0.14   | 0.15    |
| 2300  | 0.15        | 0.15   | 0.15    |
| 2400  | 0.15        | 0.15   | 0.15    |
| 2500  | 0.15        | 0.15   | 0.15    |
| 2600  | 0.15        | 0.15   | 0.15    |
| 2700  | 0.15        | 0.15   | 0.16    |
| 2800  | 0.16        | 0.16   | 0.16    |
| 2900  | 0.16        | 0.16   | 0.16    |
| 3000  | 0.16        | 0.16   | 0.17    |
| 3100  | 0.16        | 0.17   | 0.17    |
| 3200  | 0.17        | 0.17   | 0.17    |
| 3300  | 0.17        | 0.17   | 0.18    |
| 3400  | 0.18        | 0.18   | 0.18    |
| 3500  | 0.18        | 0.18   | 0.19    |
| 3600  | 0.19        | 0.19   | 0.19    |
| 4000  | 0.21        | 0.21   | 0.22    |
| 4500  | 0.26        | 0.26   | 0.27    |
| 4800  | 0.30        | 0.31   | 0.32    |


\* Temperature test data was based on the underlying chip

## Typical Performance Curves

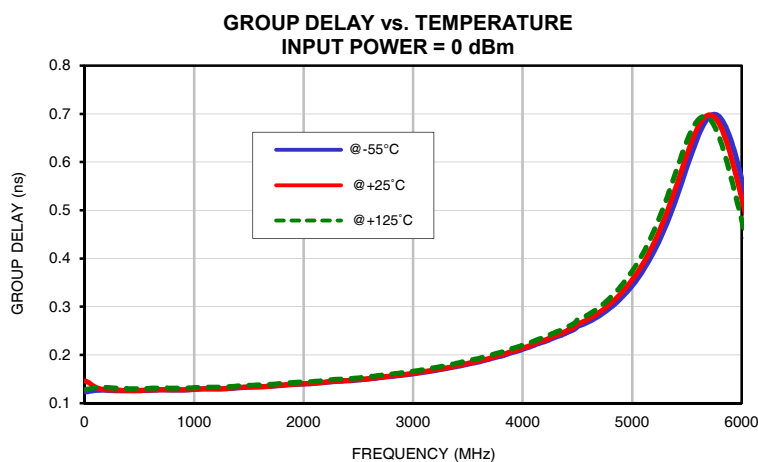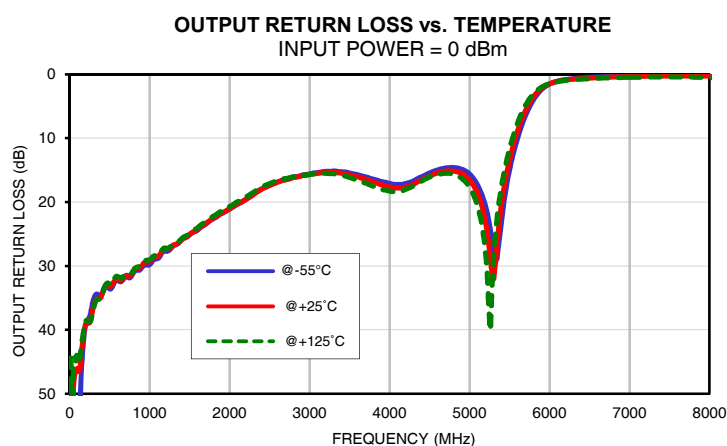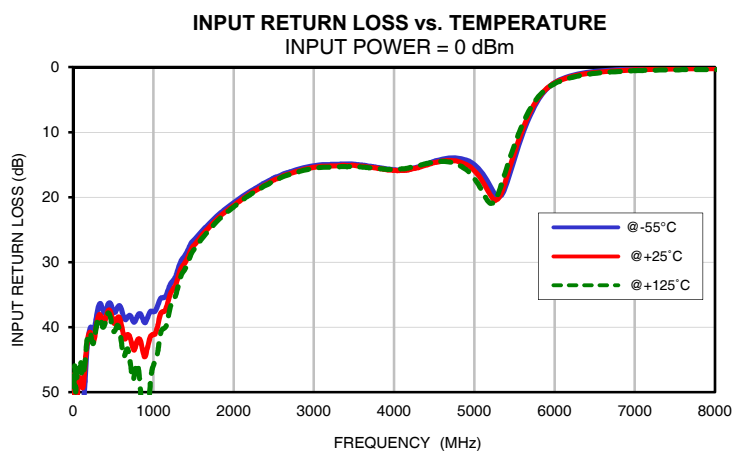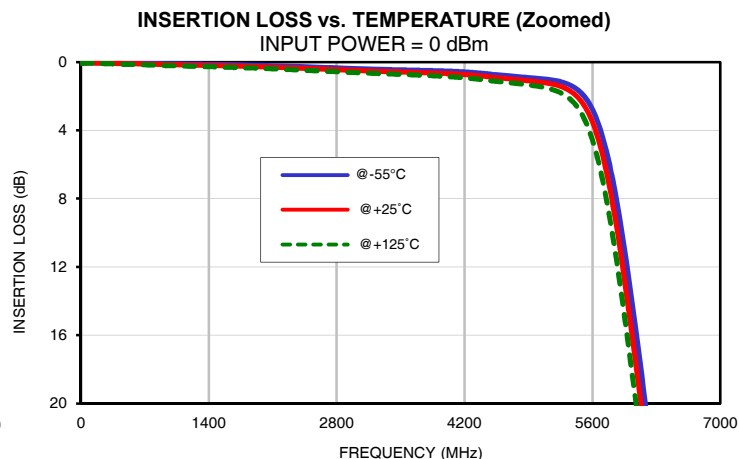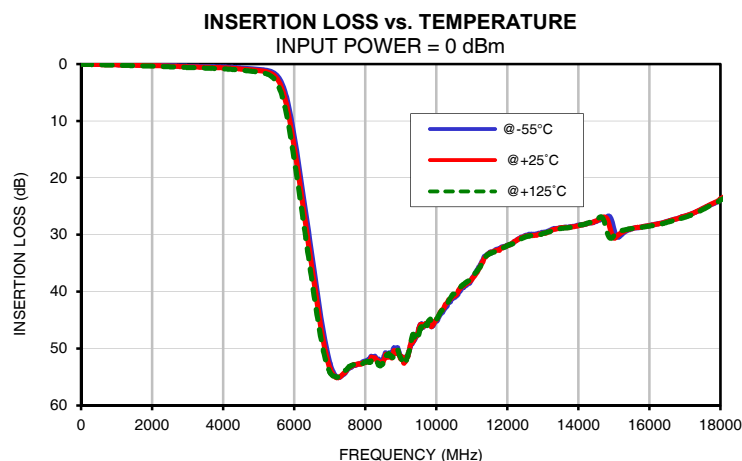

\* Temperature test data was based on the underlying chip

### Outline Dimensions

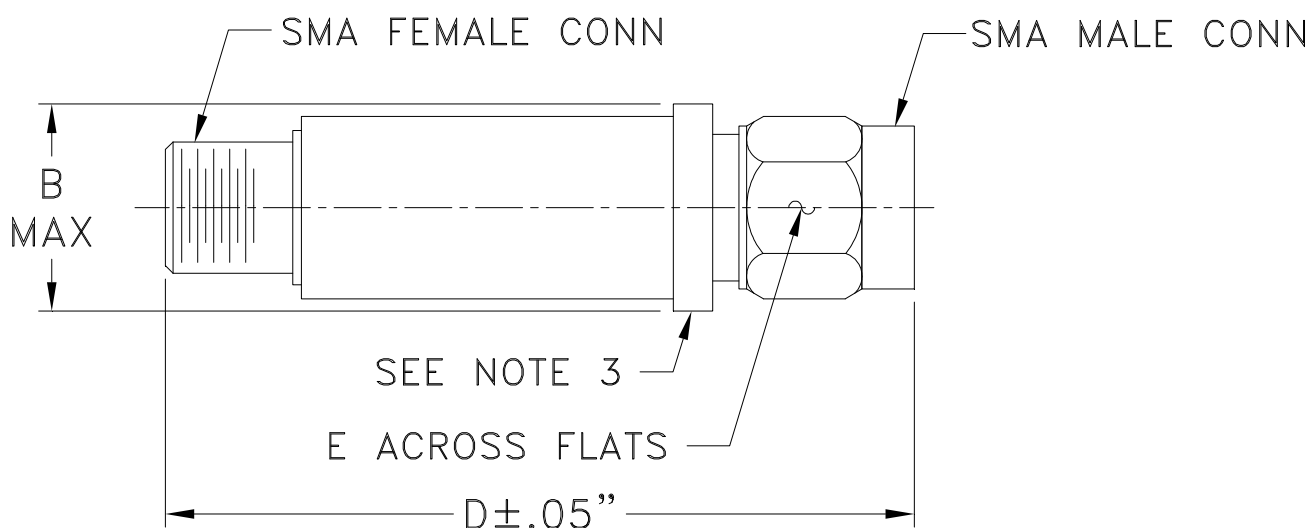

| CASE #. | A  | B               | C  | D               | E              | WT GRAMS |
|---------|----|-----------------|----|-----------------|----------------|----------|
| FF704   | -- | .410<br>(10.41) | -- | 1.43<br>(36.32) | .312<br>(7.92) | 10.0     |

Dimensions are in inches (mm). Tolerances: 2Pl. ± .04; 3Pl. ± .030

#### Notes:

1. Case material: Stainless steel.
2. Case finish: Gold plated.
3. Round Flange may have .312 Across Flats in some models.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification              | Test/Inspection Condition                                                           | Reference/Spec                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Operating Temperature      | -55° to 125° C<br>Ambient Environment                                               | Individual Model Data Sheet                                                                          |
| Storage Temperature        | -55° to 125° C<br>Ambient Environment                                               | Individual Model Data Sheet                                                                          |
| Humidity                   | 90 to 95% RH, 240 hours, 50°C                                                       | MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D                                                                 |
| Mechanical Shock           | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes                   | MIL-STD-202, Method 213, Condition A                                                                 |
| Thermal Shock              | -55° to 125°C, 100 cycles                                                           | MIL-STD-202, Method 107, Condition A-3, Except +125°C                                                |