

SPDT RF Switch

50Ω 500-6000 MHz

Absorptive RF Switch with internal driver.
Single Supply Voltage, +3V to +5V

Product Features

- High Isolation, 65 dB typ. at 1 GHz
- Low insertion loss, 1.0 dB typ. at 1 GHz
- High IP3, 50 dBm typ. at 1 GHz
- Fast switching, Rise/fall time, 23 ns typ.
- Low current consumption, 12 µA typ.



VSWA2-63DR+

CASE STYLE: DG1235-1

Typical Applications

- Automated switching networks
- Cellular/ PCS
- ISM, WCDMA, WiMAX, LTE


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

General Description

VSWA2-63DR+ is a high isolation absorptive SPDT switch with integral CMOS driver, operates with single positive supply voltage while consuming, 12µA typical. It has been designed for very wideband operation of 500-6000 MHz for 50Ω systems and yet is usable in 75Ω systems with degraded return loss. This switch is usable over an extended frequencies from 300 kHz to 500 MHz with reflective switch performance. It is packaged in a tiny 4mm x 4mm x 0.9mm package and is rated MSL1 and class 1A ESD.

Simplified Schematic and Pad Description

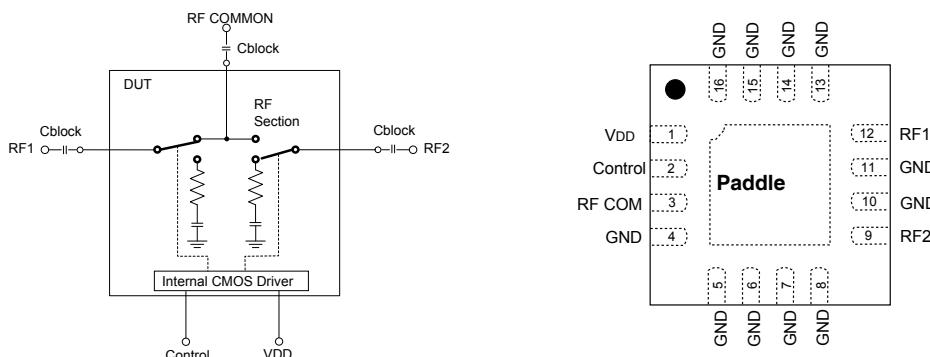

Function	Pad Number	Description
RF COM	3	RF Common/ SUM Port, requires DC block (see Fig. 2)
RF1	12	RF Out #1/In Port #1, requires DC block (see Fig. 2)
RF2	9	RF Out #1/In Port #2, requires DC block (see Fig. 2)
Control	2	CMOS Control IN
VDD	1	Supply Voltage
GND	4,5,6,7,8,10,11 13,14,15,16, paddle	RF Ground

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



RF Electrical Specifications⁽¹⁾, 500 - 6000 MHz, T_{AMB}=25°C, V_{DD}= +3V to +5V

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		500		6000	MHz
Insertion Loss ⁽²⁾	0.3 to 500		0.7		dB
	500 to 2000		0.7	1.3	
	2000 to 3000		0.8	1.5	
	3000 to 4000		0.9	1.5	
	4000 to 6000		1.0	1.9	
Isolation between Common port and RF1/RF2 Ports	0.3 to 500	—	73		dB
	500 to 2000	56	66		
	2000 to 3000	50	64		
	3000 to 4000	45	58		
	4000 to 6000	38	54		
Isolation between RF1 and RF2 ports	0.3 to 500		74		dB
	500 to 1000	50	60		
	1000 to 2000	45	56		
	2000 to 3000	40	52		
	3000 to 4000	38	50		
Return Loss (ON STATE)	4000 to 6000	34	46		dB
	0.3 to 500		24		
	500 to 2000		23		
	2000 to 3000		23		
	3000 to 4000		22		
Return Loss @ RF1/RF2 ports (OFF STATE)	4000 to 6000		20		dB
	500 to 2000		23		
	2000 to 3000		33		
	3000 to 4000		23		
Input IP3	4000 to 6000		24		dBm
	V _{DD} =3V	500 to 2000	46		
		2000 to 6000	40		
	V _{DD} =5V	500 to 2000	50		
Input Compression ⁽³⁾		2000 to 6000	44		dBm
	1dB, V _{DD} =3V	500 to 2000	24		
		2000 to 6000	22		
	0.2 dB, V _{DD} =5V	500 to 2000	30		
		2000 to 6000	27		

DC Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
VDD, Supply Voltage	3		5	V
Supply Current (V _{DD} = 5V) ⁽⁴⁾		50		µA
Control Voltage Low	0		0.5	V
Control Voltage High ⁽⁵⁾	2.7 ⁽⁶⁾		V _{DD}	V
Control Current		5		µA

Notes:

1. Tested on Mini-Circuit's test board TB-407+, using Agilent's N5230A network analyzer (see Characterization Test Circuit, Fig.1).
2. Insertion loss values are deembedded from test board loss.
3. Do not exceed RF input power as shown in Absolute Maximum Rating table.
4. Supply current increases with switching repetition rate. See graph.
5. CMOS interface. Latch up condition may occur when logic high signal is applied prior to power supply.
6. 3.5V for V_{DD}=4 to 5V

Switching Specifications

Parameter	Min.	Typ.	Max.	Units
Rise/Fall Time (10 to 90% or 90 to 10% RF)		23		nSec
Switching Time, 50% CTRL to 90/10% RF		35		nSec
Video Feedthrough, (control 0 to 3V, freq.=500 KHz, V _{DD} =5V)		25		mV _{P-P}

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Absolute Maximum Ratings⁽⁶⁾

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to 150°C
V_{DD} , Supply Voltage	2.7 to 5.5V
Voltage Control	-0.2V Min. V_{DD} Max.
RF input power	1Watt
Dissipated Power at 25°C	350mW

6. Operation of this device above any of these conditions may cause permanent damage.

Truth Table (State of control voltage selects the desired switch state)

State of Control Voltage	RF Common to	
	RF1	RF2
Low	ON	OFF
High	OFF	ON

ON- low insertion loss state OFF- Isolation State

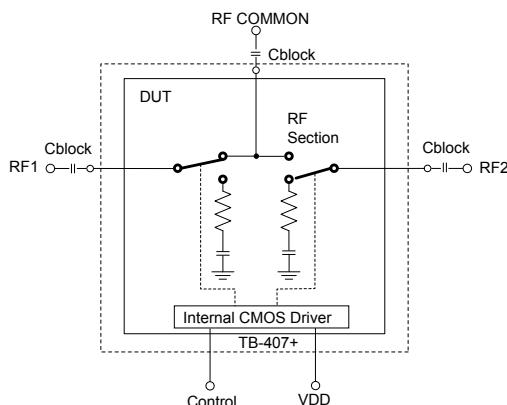
Characterization Test Circuit

Figure 1: Block Diagram Of Test Circuit Used For Characterization.
(DUT soldered on Mini-Circuit's TB-407+)

Test Equipment:**For Insertion loss, Isolation, Return loss and DC current:**

Agilent's N5230A Network Analyzer , E3631A power supply. Cblock: Internal to network Analyzer.

For Switching Time and DC Current:

Agilent's 54832B oscilloscope, 81110A pulse generator and E3631 A power supply. Cblock: Mini-Circuits BLK-18-S+

For Input IP3:

Mini-Circuits DC blocks: BLK-18-S+ on all ports, Agilent's E8257D signal generators, 437B power meter, N9020A Signal analyzer and E3631 A power supply.

For Compression:

Mini-Circuits DC blocks: BLK-18-S+ on all ports. ZVE-8G and ZHL-42W amplifier as driver amplifier at RF Common. Agilent's N5230A Network Analyzer, E3631A power supply

Conditions:

$V_{DD} = +3$ and $+5V$, Control= 0 and 3V.

For Insertion loss, isolation and return loss: Pin=0 dBm

For Input IP3: Pin=-5dBm/tone.

For Switching time: RF frequency: 500 MHz at 0 dBm, Control Frequency: 500 KHz and 0 and +3V.

Notes


A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Product Marking

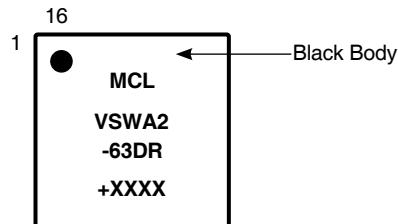

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Performance data, graphs

Case Style: DG1235-1

Plastic, finish: Nickel Palladium Gold

Tape & Reel: F87

Standard quantities available on reel: 7" reels with 20, 50, 100, 200, 500 devices
13" reels with 3K devices

Suggested Layout for PCB Design: PL-278

Evaluation Board: TB-486+

Environmental Ratings: ENV41

Recommended Application Circuit

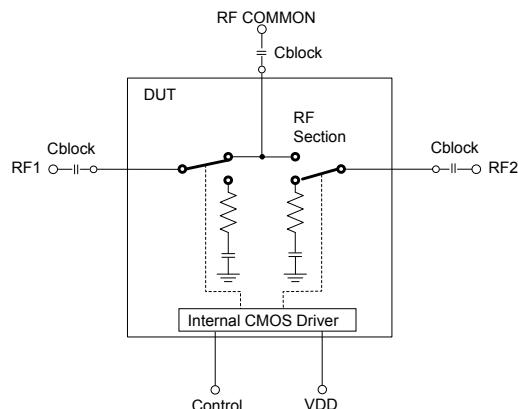


Fig. 2: Evaluation board includes case, connectors and components soldered to PCB.

Frequency (MHz)	Cblock (Suggested value)
0.3-500	0.1µF
500-6000	47pF

Cblock should be free of resonance over frequency of operation.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



ESD Rating


Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with JESD22-A114

Machine Model (MM): Class A (Passes 50V) in accordance with JESD22-A115

MSL Rating

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL Test Flow Chart

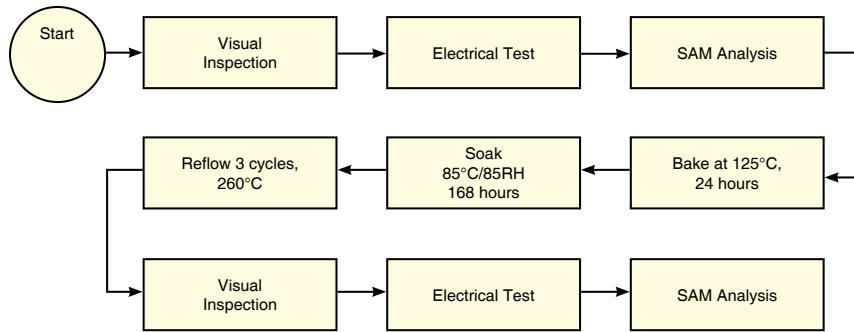

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



RF Switch SPDT

VSWA2-63DR+

Typical Performance Data

RF FREQ (MHz)	INSERTION LOSS				ISOLATION								
	VDD=+3V (dB)		VDD=+5V (dB)		VDD=+3V (dB)		VDD=+5V (dB)		VDD=+3V (dB)		VDD=+5V (dB)		
	RF COM-RF1	RF COM-RF2	RF1-RF2 State LOW*	RF1-RF2 State HIGH*	RF1-RF2 State LOW*	RF1-RF2 State HIGH*							
0.3	0.87	0.88	0.86	0.86	0.3	88.66	99.00	89.65	89.93	103.84	93.40	87.91	92.90
0.5	0.90	0.90	0.90	0.89	0.5	96.22	97.27	93.19	92.84	94.19	89.91	92.70	86.59
1.0	0.90	0.89	0.91	0.89	1.0	108.36	100.23	98.89	101.81	101.08	110.13	95.93	106.23
5.0	0.89	0.86	0.91	0.86	5.0	86.99	79.30	90.21	81.62	80.92	87.16	83.46	88.15
10.0	0.88	0.83	0.90	0.84	10.0	82.21	73.18	84.33	74.69	74.47	82.88	75.65	85.82
50.0	0.91	0.83	0.92	0.84	50.0	74.88	60.17	75.61	61.25	61.49	74.64	62.50	75.83
100.0	0.91	0.83	0.93	0.85	100.0	70.60	58.46	71.24	58.97	59.93	69.51	60.39	70.28
200.0	0.92	0.84	0.94	0.86	200.0	69.14	59.86	69.61	60.18	61.63	66.17	61.75	66.61
300.0	0.93	0.85	0.94	0.87	300.0	68.79	61.18	69.09	61.47	62.09	63.81	62.14	64.38
400.0	0.93	0.86	0.95	0.88	400.0	68.93	61.94	69.07	62.21	61.21	62.00	61.20	62.48
500.0	0.94	0.87	0.96	0.89	500.0	69.44	62.60	69.48	62.81	59.82	60.36	59.89	60.85
600.0	0.95	0.88	0.97	0.91	600.0	69.16	62.64	69.18	62.84	58.35	58.85	58.40	59.34
700.0	0.96	0.89	0.98	0.92	700.0	69.23	62.78	69.06	62.91	57.16	57.70	57.24	58.12
800.0	0.96	0.90	0.98	0.92	800.0	69.67	62.66	69.06	62.76	56.08	56.66	56.15	57.07
900.0	0.96	0.90	0.97	0.91	900.0	70.09	62.68	69.45	62.77	55.08	55.67	55.16	56.05
1000.0	0.97	0.91	0.98	0.92	1000.0	70.44	62.61	69.72	62.69	54.22	54.80	54.29	55.21
1200.0	0.99	0.94	1.01	0.96	1200.0	71.00	62.29	69.15	62.03	52.79	53.28	52.85	53.71
1500.0	1.03	0.99	1.05	1.02	1500.0	73.24	62.11	70.68	61.73	50.86	51.27	51.00	51.59
1700.0	1.05	1.00	1.07	1.03	1700.0	78.96	62.42	73.04	61.84	49.74	50.06	49.83	50.38
2000.0	1.09	1.04	1.13	1.08	2000.0	74.87	64.61	79.90	64.20	48.13	48.67	48.15	48.72
2200.0	1.13	1.07	1.16	1.10	2200.0	70.18	64.16	69.96	63.52	47.40	47.86	47.46	48.01
2500.0	1.16	1.10	1.20	1.14	2500.0	64.32	60.98	63.58	60.17	46.47	46.77	46.54	46.90
2700.0	1.18	1.12	1.22	1.17	2700.0	61.66	58.96	61.22	58.56	45.85	45.98	45.84	46.07
3000.0	1.22	1.16	1.28	1.21	3000.0	61.35	57.26	62.47	56.94	44.76	44.60	44.70	44.45
3200.0	1.21	1.14	1.25	1.18	3200.0	58.20	55.31	57.60	55.00	44.21	44.14	44.21	44.12
3500.0	1.21	1.14	1.25	1.19	3500.0	56.58	53.41	56.54	52.90	43.31	43.24	43.28	43.09
3700.0	1.21	1.14	1.25	1.18	3700.0	54.63	52.04	53.88	51.48	42.83	42.71	42.79	42.56
4000.0	1.25	1.16	1.30	1.21	4000.0	52.54	50.50	51.81	50.15	42.07	41.90	41.96	41.66
4200.0	1.26	1.17	1.31	1.22	4200.0	50.91	49.70	50.22	49.14	41.79	41.38	41.70	41.11
4500.0	1.33	1.24	1.37	1.27	4500.0	50.59	48.83	49.74	48.14	41.31	40.61	41.15	40.25
4700.0	1.35	1.25	1.38	1.28	4700.0	49.47	48.11	48.91	47.37	41.17	40.24	40.93	39.89
5000.0	1.43	1.33	1.43	1.33	5000.0	49.00	46.66	47.58	46.01	40.83	39.64	40.52	39.21
5200.0	1.47	1.36	1.46	1.36	5200.0	49.58	45.75	48.16	45.32	40.59	39.47	40.29	38.96
5500.0	1.45	1.37	1.43	1.35	5500.0	50.57	44.72	48.55	44.04	40.05	39.43	39.79	38.81
5700.0	1.45	1.38	1.41	1.35	5700.0	50.68	44.07	48.40	43.28	39.59	39.35	39.34	38.70
6000.0	1.44	1.40	1.39	1.36	6000.0	51.38	44.33	48.09	43.04	38.96	39.22	38.72	38.55

*Note

State of Control Voltage	RF Common to	
	RF1	RF2
LOW	ON	OFF
HIGH	OFF	ON

ON - Low insertion loss state
OFF - Isolation state

 Mini-Circuits®

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350168, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4651 For detailed performance specs & shopping online see Mini-Circuits web site

minicircuits.com

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

HF/RF MICROWAVE COMPONENTS

REV. X1

VSWA2-63DR+

10/16/2009

Page 1 of 5

RF Switch SPDT

VSWA2-63DR+

Typical Performance Data

RF FREQ (MHz)	VSWR (:1)								RF FREQ (MHz)	VSWR (:1)				
	VDD=+3V				VDD=+5V					VDD=+3V		VDD=+5V		
	RF COM State LOW*	RF COM State HIGH*	RF1 State LOW*	RF2 State HIGH*	RF COM State LOW*	RF COM State HIGH*	RF1 State LOW*	RF2 State HIGH*		RF1 State HIGH*	RF2 State LOW*	RF1 State HIGH*	RF2 State LOW*	
0.3	1.20	1.20	1.20	1.20	1.21	1.21	1.21	1.21	500.0	1.84	1.87	1.86	1.89	
0.5	1.20	1.20	1.20	1.20	1.21	1.21	1.21	1.21	600.0	1.80	1.83	1.82	1.85	
1.0	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	700.0	1.78	1.80	1.80	1.83	
5.0	1.19	1.18	1.19	1.18	1.19	1.18	1.19	1.18	800.0	1.77	1.80	1.79	1.82	
10.0	1.17	1.18	1.17	1.18	1.18	1.18	1.18	1.18	900.0	1.77	1.79	1.79	1.82	
50.0	1.16	1.18	1.16	1.18	1.16	1.18	1.16	1.18	1000.0	1.77	1.80	1.79	1.83	
100.0	1.16	1.18	1.16	1.18	1.16	1.19	1.16	1.19	1200.0	1.78	1.80	1.80	1.83	
200.0	1.16	1.19	1.16	1.18	1.17	1.19	1.17	1.19	1500.0	1.80	1.83	1.83	1.86	
300.0	1.16	1.19	1.16	1.18	1.17	1.19	1.16	1.19	1700.0	1.82	1.85	1.85	1.89	
400.0	1.17	1.19	1.16	1.18	1.18	1.20	1.16	1.19	2000.0	1.84	1.88	1.87	1.92	
500.0	1.17	1.20	1.16	1.18	1.18	1.20	1.16	1.19	2200.0	1.85	1.89	1.89	1.93	
600.0	1.18	1.20	1.16	1.18	1.19	1.21	1.16	1.18	2500.0	1.86	1.89	1.90	1.93	
700.0	1.19	1.21	1.15	1.18	1.19	1.21	1.16	1.18	2700.0	1.85	1.88	1.89	1.92	
800.0	1.19	1.21	1.15	1.17	1.19	1.21	1.16	1.18	3000.0	1.82	1.84	1.86	1.89	
900.0	1.19	1.21	1.15	1.17	1.19	1.21	1.15	1.17	3200.0	1.78	1.80	1.83	1.85	
1000.0	1.19	1.21	1.15	1.17	1.20	1.22	1.15	1.17	3500.0	1.71	1.73	1.75	1.78	
1200.0	1.19	1.21	1.14	1.16	1.19	1.21	1.15	1.16	3700.0	1.65	1.67	1.70	1.72	
1500.0	1.19	1.21	1.16	1.17	1.20	1.21	1.17	1.18	4000.0	1.56	1.58	1.61	1.63	
1700.0	1.21	1.21	1.20	1.21	1.22	1.22	1.21	1.22	4200.0	1.50	1.51	1.54	1.56	
2000.0	1.25	1.25	1.28	1.29	1.28	1.27	1.30	1.31	4500.0	1.41	1.41	1.45	1.46	
2200.0	1.30	1.30	1.36	1.36	1.32	1.32	1.38	1.39	4700.0	1.35	1.35	1.39	1.40	
2500.0	1.36	1.36	1.46	1.47	1.39	1.38	1.49	1.50	5000.0	1.26	1.27	1.30	1.32	
2700.0	1.40	1.39	1.52	1.52	1.43	1.42	1.55	1.56	5200.0	1.22	1.24	1.25	1.28	
3000.0	1.42	1.41	1.55	1.55	1.47	1.45	1.59	1.59	5500.0	1.16	1.19	1.20	1.24	
3200.0	1.40	1.38	1.55	1.54	1.44	1.42	1.59	1.59	5700.0	1.13	1.17	1.17	1.22	
3500.0	1.36	1.35	1.49	1.49	1.41	1.39	1.53	1.54	6000.0	1.10	1.17	1.14	1.22	
3700.0	1.33	1.32	1.43	1.43	1.38	1.36	1.48	1.48						
4000.0	1.34	1.33	1.37	1.35	1.38	1.36	1.41	1.40						
4200.0	1.37	1.36	1.35	1.32	1.40	1.38	1.39	1.36						
4500.0	1.44	1.43	1.35	1.30	1.45	1.43	1.37	1.32						
4700.0	1.48	1.47	1.36	1.31	1.50	1.47	1.38	1.32						
5000.0	1.50	1.48	1.39	1.32	1.50	1.47	1.39	1.32						
5200.0	1.52	1.49	1.40	1.32	1.52	1.48	1.40	1.32						
5500.0	1.53	1.51	1.39	1.32	1.52	1.49	1.39	1.31						
5700.0	1.52	1.50	1.37	1.29	1.50	1.48	1.36	1.29						
6000.0	1.48	1.48	1.32	1.27	1.44	1.44	1.31	1.27						

*Note

State of Control Voltage	RF Common to	
	RF1	RF2
LOW	ON	OFF
HIGH	OFF	ON

ON - Low insertion loss state

OFF - Isolation state

RF Switch SPDT

VSWA2-63DR+

Typical Performance Data

RF FREQ (MHz)	INPUT IP3			
	VDD=+3V (dBm)		VDD =+5V (dBm)	
	RF COM-RF1	RF COM-RF2	RF COM-RF1	RF COM-RF2
500.0	48.68	48.14	52.14	51.26
700.0	47.74	47.96	50.23	50.23
900.0	46.29	45.98	50.14	49.78
1000.0	46.09	45.75	50.44	50.05
1250.0	45.26	45.10	49.31	49.06
1500.0	45.12	44.89	49.65	49.35
1750.0	44.62	44.46	49.20	48.88
2000.0	43.65	43.55	47.62	47.78
2500.0	42.40	42.22	46.94	47.01
3000.0	40.70	40.68	45.78	45.68
3500.0	38.61	38.61	43.12	43.33
4000.0	38.09	38.20	42.75	43.01
4500.0	35.62	35.98	40.94	41.53
5000.0	36.21	36.61	40.71	41.32
5500.0	33.90	34.19	38.28	38.96
6000.0	34.14	34.38	39.72	40.31

DC Current vs Repetition Rate		
IDD (micro A)		
Typ.		
Rep Rate (MHz)	VDD=+3V	VDD=+5V
0.0005	0.8	6.4
1.0	62.5	93.8
2.0	121.3	176.0
3.0	175.3	252.5
4.0	233.5	334.0
5.0	282.5	409.3
6.0	319.0	462.0
7.0	386.5	559.5
8.0	432.8	614.8
9.0	491.0	729.5
10.0	540.5	776.8

RF FREQ (MHz)	INPUT 1dB COMPRESSION	
	VDD=+3V (dBm)	VDD =+5V (dBm)
500.0	24.52	30.90
600.0	23.99	30.51
700.0	24.29	30.86
800.0	23.99	30.59
900.0	23.84	30.39
1000.0	23.86	30.51
1100.0	23.86	30.53
1200.0	23.77	30.58
1300.0	24.58	30.95
1400.0	24.46	30.75
1500.0	24.36	30.92
1600.0	24.41	31.02
1700.0	24.56	31.37
1800.0	24.27	31.07
1900.0	24.17	30.97
2000.0	24.70	31.29
2250.0	23.80	29.86
2500.0	23.65	29.78
2750.0	23.42	29.71
3000.0	22.64	29.22
3250.0	21.99	28.40
3500.0	22.15	28.31
3750.0	22.26	28.17
4000.0	22.00	27.80
4250.0	21.09	27.36
4500.0	19.90	26.68
4750.0	20.31	26.60
5000.0	20.84	26.87
5250.0	21.02	26.80
5500.0	20.85	26.92
5750.0	21.15	27.43
6000.0	21.01	27.32

RF Switch SPDT

VSWA2-63DR+

Typical Performance Data

RF FREQ (MHz)	INSERTION LOSS @ VDD=+5V OVER TEMPERATURE						ISOLATION @ VDD=+5V OVER TEMPERATURE												
	RF COM-RF1 (dB)			RF COM-RF2 (dB)			RF COM-RF1 (dB)			RF COM-RF2 (dB)			RF1-RF2 (ON1) (dB)			RF1-RF2 (ON2) (dB)			
	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	
0.3	0.56	0.75	0.83	0.55	0.73	0.81	0.3	114.38	103.15	115.23	99.44	89.97	100.82	101.92	95.87	91.16	106.53	114.92	93.32
0.5	0.56	0.75	0.83	0.56	0.72	0.81	0.5	111.04	109.99	102.14	105.42	96.46	97.30	108.02	100.24	92.77	102.89	102.75	109.94
1.0	0.57	0.76	0.84	0.57	0.73	0.82	1.0	105.33	101.91	101.32	103.86	98.76	92.11	107.16	96.99	92.04	108.97	103.86	104.47
5.0	0.59	0.77	0.85	0.56	0.71	0.80	5.0	88.99	90.50	90.90	83.47	82.25	81.01	83.35	83.21	81.69	88.63	89.64	91.09
10.0	0.61	0.77	0.85	0.57	0.71	0.79	10.0	79.77	81.92	83.52	74.96	74.34	74.02	75.07	75.63	74.96	80.09	82.34	83.26
50.0	0.67	0.80	0.85	0.57	0.71	0.79	50.0	77.90	77.19	76.54	61.43	60.87	60.74	62.44	62.27	62.27	78.26	77.34	76.93
100.0	0.67	0.80	0.86	0.57	0.72	0.80	100.0	71.75	71.84	71.72	57.72	58.23	58.85	58.78	59.65	60.42	70.77	71.40	71.31
200.0	0.69	0.82	0.88	0.58	0.74	0.82	200.0	70.32	70.24	70.21	58.19	59.36	60.30	59.73	61.12	62.24	67.86	68.07	68.32
300.0	0.69	0.83	0.90	0.59	0.76	0.85	300.0	69.36	70.06	69.70	59.62	60.78	61.82	61.22	62.35	63.25	65.62	66.14	66.40
400.0	0.69	0.84	0.92	0.59	0.77	0.87	400.0	69.64	69.97	70.02	60.53	61.73	62.39	61.91	62.72	63.19	64.32	64.58	64.70
500.0	0.69	0.85	0.93	0.60	0.78	0.89	500.0	68.84	69.64	69.93	61.19	62.22	62.84	61.54	61.89	61.95	63.29	63.06	63.19
600.0	0.69	0.85	0.94	0.60	0.79	0.90	600.0	70.18	70.53	70.18	62.22	63.03	63.61	60.83	60.98	60.75	61.44	61.72	61.67
700.0	0.69	0.86	0.96	0.61	0.81	0.92	700.0	70.83	70.93	71.18	62.91	63.47	63.43	60.05	59.97	59.93	60.26	60.53	60.61
800.0	0.69	0.87	0.97	0.62	0.82	0.94	800.0	69.27	70.40	69.80	64.34	64.27	64.08	59.12	59.14	58.75	59.65	59.57	59.58
900.0	0.69	0.89	0.99	0.62	0.83	0.95	900.0	71.95	72.66	71.72	64.31	64.12	63.50	58.18	58.06	57.87	58.27	58.56	58.65
1000.0	0.70	0.90	1.00	0.63	0.85	0.97	1000.0	71.58	74.07	71.80	65.13	63.73	63.63	57.15	57.35	56.97	57.48	57.50	57.79
1200.0	0.71	0.92	1.03	0.65	0.88	1.01	1200.0	74.51	75.55	74.72	66.25	64.39	62.97	55.80	55.66	55.71	55.81	56.05	56.20
1500.0	0.73	0.97	1.09	0.68	0.93	1.07	1500.0	74.28	80.61	76.49	67.00	64.35	62.77	53.98	54.04	53.97	53.68	54.03	54.07
1700.0	0.75	0.99	1.13	0.71	0.96	1.11	1700.0	68.23	75.16	80.20	68.73	65.33	62.72	52.65	52.81	53.04	52.13	52.61	52.82
2000.0	0.77	1.03	1.17	0.73	1.00	1.16	2000.0	67.45	73.04	76.95	67.74	65.42	63.97	51.09	51.37	51.43	50.97	51.18	51.49
2200.0	0.81	1.08	1.20	0.76	1.04	1.17	2200.0	62.91	68.48	70.37	64.88	64.98	61.66	50.51	50.68	51.16	49.72	50.34	50.23
2500.0	0.84	1.13	1.25	0.79	1.09	1.22	2500.0	60.94	63.49	64.71	62.89	62.33	63.91	49.02	49.71	49.62	49.46	49.54	49.90
2700.0	0.89	1.18	1.29	0.86	1.13	1.27	2700.0	57.46	61.67	66.90	60.17	61.63	61.46	48.67	48.94	49.09	48.99	48.63	49.14
3000.0	0.96	1.22	1.36	0.92	1.18	1.34	3000.0	57.98	59.31	62.38	56.63	59.26	58.88	48.05	48.27	48.68	47.08	47.63	47.93
3200.0	0.93	1.22	1.36	0.88	1.17	1.33	3200.0	56.21	57.76	59.54	55.71	58.34	58.40	47.22	47.60	47.78	46.36	47.13	46.83
3500.0	0.94	1.23	1.37	0.91	1.20	1.36	3500.0	56.90	56.26	59.15	52.68	56.69	56.29	46.14	46.44	47.07	45.10	45.80	45.53
3700.0	0.93	1.22	1.38	0.88	1.19	1.36	3700.0	52.49	55.21	54.36	54.74	54.40	60.01	45.26	46.13	46.29	44.67	45.49	45.16
4000.0	0.93	1.22	1.40	0.90	1.21	1.40	4000.0	53.45	54.51	55.04	51.21	53.61	55.24	45.41	45.35	45.62	44.41	44.66	45.05
4200.0	0.88	1.23	1.42	0.87	1.21	1.41	4200.0	51.70	53.41	51.92	51.71	53.35	61.44	44.48	45.04	45.05	43.79	44.01	44.02
4500.0	0.92	1.27	1.45	0.90	1.24	1.44	4500.0	53.18	51.76	54.38	50.33	52.90	52.46	43.85	44.52	44.54	43.56	43.63	43.95
4700.0	0.94	1.33	1.52	0.91	1.30	1.49	4700.0	50.63	49.95	52.40	49.10	52.02	54.83	43.61	44.28	44.75	42.92	43.05	42.76
5000.0	1.08	1.45	1.66	1.03	1.42	1.63	5000.0	46.65	50.23	48.38	52.01	52.20	52.22	43.62	44.18	44.66	42.16	42.41	42.65
5200.0	1.09	1.50	1.73	1.10	1.49	1.72	5200.0	48.86	50.35	50.09	48.78	51.42	51.17	43.68	43.73	44.18	42.16	42.04	41.91
5500.0	1.13	1.55	1.77	1.15	1.54	1.77	5500.0	50.24	50.56	52.69	50.01	50.55	50.21	43.61	43.51	43.94	41.52	41.72	41.52
5700.0	1.07	1.51	1.77	1.11	1.51	1.80	5700.0	49.56	50.77	50.84	47.72	49.74	51.45	43.46	43.03	43.38	41.56	41.28	41.24
6000.0	1.03	1.47	1.74	1.10	1.50	1.82	6000.0	48.67	50.89	51.40	46.62	49.04	50.54	42.79	42.21	42.31	41.12	40.77	41.00

*Note

State of Control Voltage	RF Common to	
	RF1	RF2
LOW	ON	OFF
HIGH	OFF	ON

ON - Low insertion loss state
OFF - Isolation state

RF Switch SPDT

VSWA2-63DR+

Typical Performance Data

RF FREQ (MHz)	VSWR @ VDD=+5V OVER TEMPERATURE (:1)												RF FREQ (MHz)	VSWR @ VDD=+5V OVER TEMPERATURE (:1)						
	RF COM			RF COM			RF1			RF2				RF1			RF2			
	State LOW*			State HIGH*			State LOW*			State HIGH*				State HIGH*			State LOW*			
	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	-55°C	+25°C	+100°C		-55°C	+25°C	+100°C	-55°C	+25°C	+100°C	
0.3	1.13	1.17	1.20	1.14	1.17	1.19	1.13	1.17	1.20	1.14	1.17	1.19	500.0	1.59	1.70	1.84	1.57	1.69	1.83	
0.5	1.13	1.18	1.20	1.13	1.17	1.19	1.14	1.18	1.20	1.13	1.17	1.19	600.0	1.51	1.65	1.79	1.49	1.63	1.78	
1.0	1.14	1.18	1.20	1.13	1.17	1.19	1.14	1.18	1.21	1.13	1.17	1.19	700.0	1.46	1.61	1.76	1.44	1.59	1.75	
5.0	1.13	1.18	1.20	1.13	1.16	1.19	1.14	1.18	1.20	1.13	1.16	1.19	800.0	1.42	1.59	1.75	1.41	1.57	1.73	
10.0	1.14	1.17	1.19	1.15	1.18	1.20	1.14	1.18	1.20	1.14	1.18	1.20	900.0	1.40	1.57	1.74	1.38	1.55	1.71	
50.0	1.11	1.14	1.17	1.13	1.16	1.19	1.11	1.15	1.17	1.13	1.16	1.19	1000.0	1.39	1.57	1.74	1.36	1.54	1.71	
100.0	1.10	1.14	1.17	1.13	1.16	1.19	1.11	1.14	1.16	1.13	1.16	1.18	1200.0	1.37	1.56	1.73	1.34	1.53	1.70	
200.0	1.10	1.13	1.16	1.12	1.16	1.18	1.10	1.13	1.16	1.12	1.15	1.17	1500.0	1.36	1.56	1.74	1.34	1.53	1.71	
300.0	1.10	1.14	1.16	1.13	1.16	1.18	1.09	1.13	1.15	1.11	1.14	1.17	1700.0	1.37	1.57	1.75	1.33	1.54	1.71	
400.0	1.11	1.15	1.17	1.13	1.17	1.19	1.09	1.12	1.15	1.11	1.14	1.16	2000.0	1.38	1.59	1.76	1.35	1.55	1.71	
500.0	1.12	1.16	1.19	1.14	1.18	1.21	1.08	1.12	1.14	1.10	1.13	1.16	2200.0	1.39	1.59	1.76	1.37	1.56	1.73	
600.0	1.13	1.17	1.21	1.16	1.19	1.23	1.08	1.12	1.14	1.09	1.13	1.15	2500.0	1.42	1.61	1.76	1.38	1.57	1.73	
700.0	1.14	1.18	1.22	1.17	1.21	1.24	1.08	1.11	1.14	1.09	1.12	1.14	2700.0	1.42	1.61	1.76	1.41	1.58	1.73	
800.0	1.16	1.20	1.23	1.18	1.22	1.25	1.07	1.10	1.13	1.08	1.11	1.13	3000.0	1.43	1.60	1.72	1.42	1.58	1.70	
900.0	1.17	1.21	1.24	1.20	1.24	1.27	1.06	1.09	1.12	1.07	1.10	1.12	3200.0	1.45	1.60	1.71	1.42	1.57	1.70	
1000.0	1.18	1.23	1.26	1.22	1.26	1.29	1.06	1.09	1.11	1.06	1.09	1.11	3500.0	1.44	1.56	1.65	1.42	1.54	1.63	
1200.0	1.21	1.25	1.28	1.25	1.29	1.31	1.03	1.06	1.09	1.03	1.06	1.08	3700.0	1.46	1.55	1.63	1.43	1.52	1.60	
1500.0	1.25	1.30	1.32	1.29	1.33	1.35	1.04	1.05	1.08	1.03	1.04	1.07	4000.0	1.45	1.49	1.55	1.42	1.48	1.53	
1700.0	1.27	1.31	1.33	1.31	1.35	1.37	1.10	1.10	1.11	1.09	1.08	1.09	4200.0	1.45	1.47	1.51	1.41	1.44	1.47	
2000.0	1.33	1.36	1.38	1.35	1.38	1.40	1.22	1.21	1.22	1.20	1.19	1.19	4500.0	1.45	1.42	1.43	1.42	1.39	1.40	
2200.0	1.40	1.41	1.43	1.40	1.42	1.43	1.29	1.29	1.29	1.26	1.26	1.26	4700.0	1.44	1.38	1.38	1.39	1.36	1.34	
2500.0	1.48	1.48	1.48	1.46	1.47	1.47	1.43	1.42	1.41	1.39	1.39	1.38	5000.0	1.45	1.35	1.33	1.40	1.31	1.27	
2700.0	1.55	1.53	1.51	1.54	1.51	1.50	1.52	1.50	1.48	1.50	1.47	1.46	5200.0	1.42	1.31	1.26	1.41	1.28	1.23	
3000.0	1.58	1.54	1.50	1.57	1.52	1.49	1.60	1.58	1.54	1.59	1.56	1.53	5500.0	1.44	1.29	1.23	1.40	1.24	1.18	
3200.0	1.57	1.52	1.47	1.54	1.49	1.46	1.64	1.61	1.58	1.61	1.59	1.57	5700.0	1.42	1.25	1.17	1.40	1.23	1.15	
3500.0	1.49	1.45	1.40	1.47	1.44	1.40	1.55	1.54	1.50	1.53	1.53	1.51	6000.0	1.42	1.23	1.14	1.38	1.20	1.10	
3700.0	1.44	1.40	1.37	1.42	1.39	1.37	1.50	1.48	1.44	1.48	1.46	1.45								
4000.0	1.41	1.37	1.36	1.39	1.37	1.37	1.41	1.38	1.34	1.37	1.37	1.35								
4200.0	1.39	1.38	1.39	1.39	1.39	1.39	1.39	1.35	1.32	1.36	1.33	1.31								
4500.0	1.42	1.45	1.47	1.44	1.46	1.47	1.42	1.39	1.36	1.39	1.35	1.33								
4700.0	1.49	1.52	1.55	1.49	1.53	1.55	1.47	1.43	1.40	1.42	1.41	1.37								
5000.0	1.60	1.65	1.65	1.60	1.65	1.65	1.59	1.55	1.52	1.54	1.50	1.45								
5200.0	1.64	1.68	1.69	1.66	1.69	1.68	1.61	1.57	1.53	1.58	1.52	1.47								
5500.0	1.69	1.72	1.73	1.71	1.71	1.71	1.65	1.58	1.56	1.60	1.52	1.47								
5700.0	1.69	1.70	1.73	1.73	1.71	1.72	1.60	1.54	1.52	1.58	1.50	1.46								
6000.0	1.61	1.63	1.66	1.66	1.67	1.56	1.49	1.47	1.53	1.46	1.42	1.42								

*Note

State of Control Voltage	RF Common to		
	RF1	RF2	
LOW	ON	OFF	
HIGH	OFF	ON	

ON - Low insertion loss state
OFF - Isolation state

 **Minicircuits®**

ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350169, Brooklyn, New York 11235-0000 (718) 934-4500 Fax (718) 332-4651 For detailed performance specs & shopping online see Minicircuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINICIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS











REV. X1
VSWA2-63DR+
10/16/2009
Page 5 of 5

RF Switch SPDT

VSWA2-63DR+

Typical Performance Curves

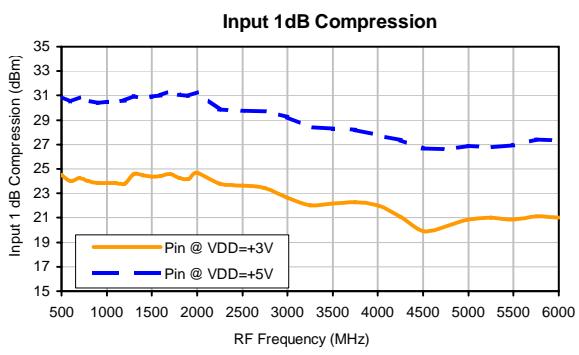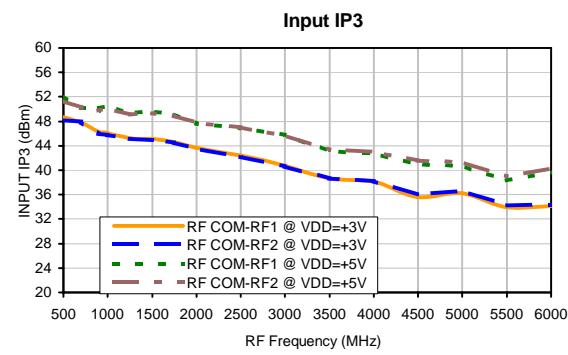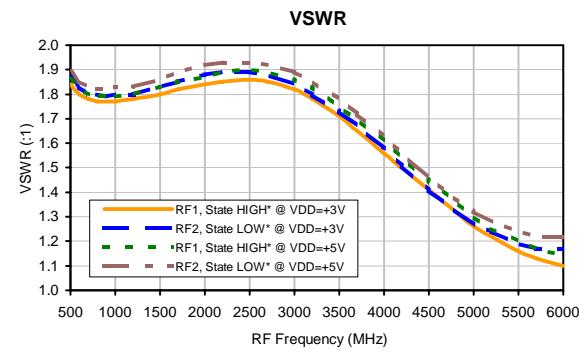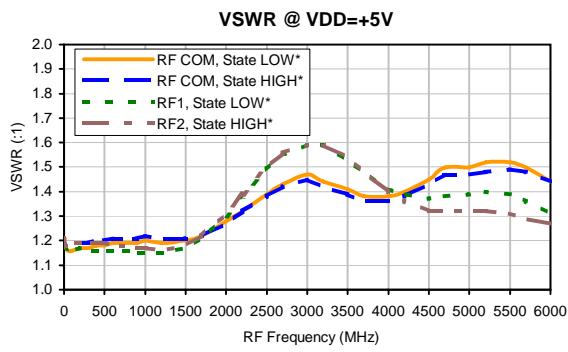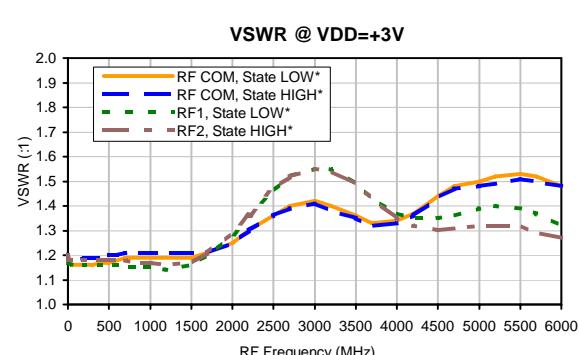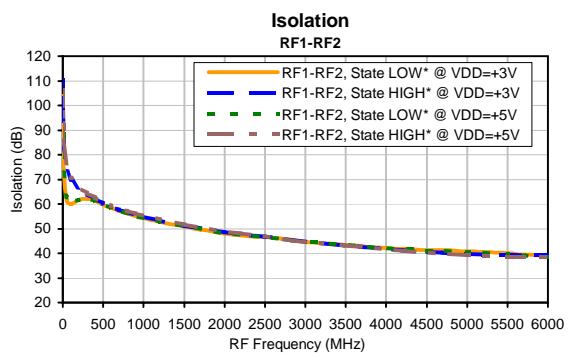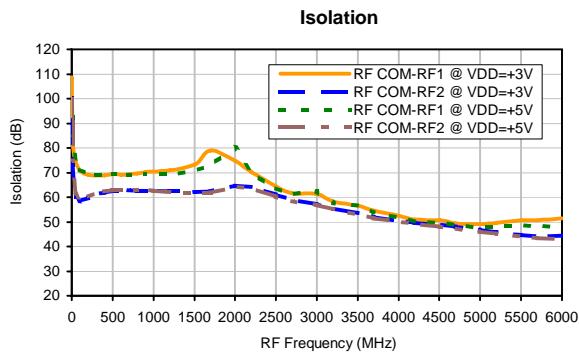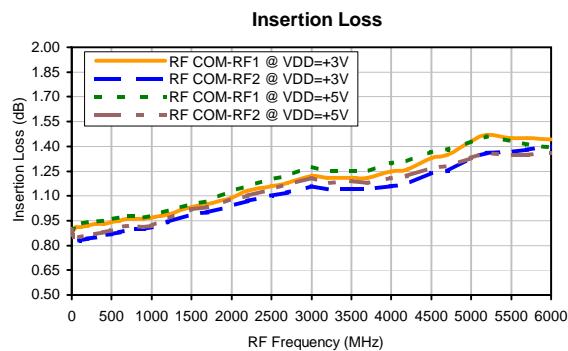

*Note


State of Control Voltage	RF Common to	
	RF1	RF2
LOW	ON	OFF
HIGH	OFF	ON

ON - Low insertion loss state
OFF - Isolation state

RF Switch SPDT

VSWA2-63DR+

Typical Performance Curves

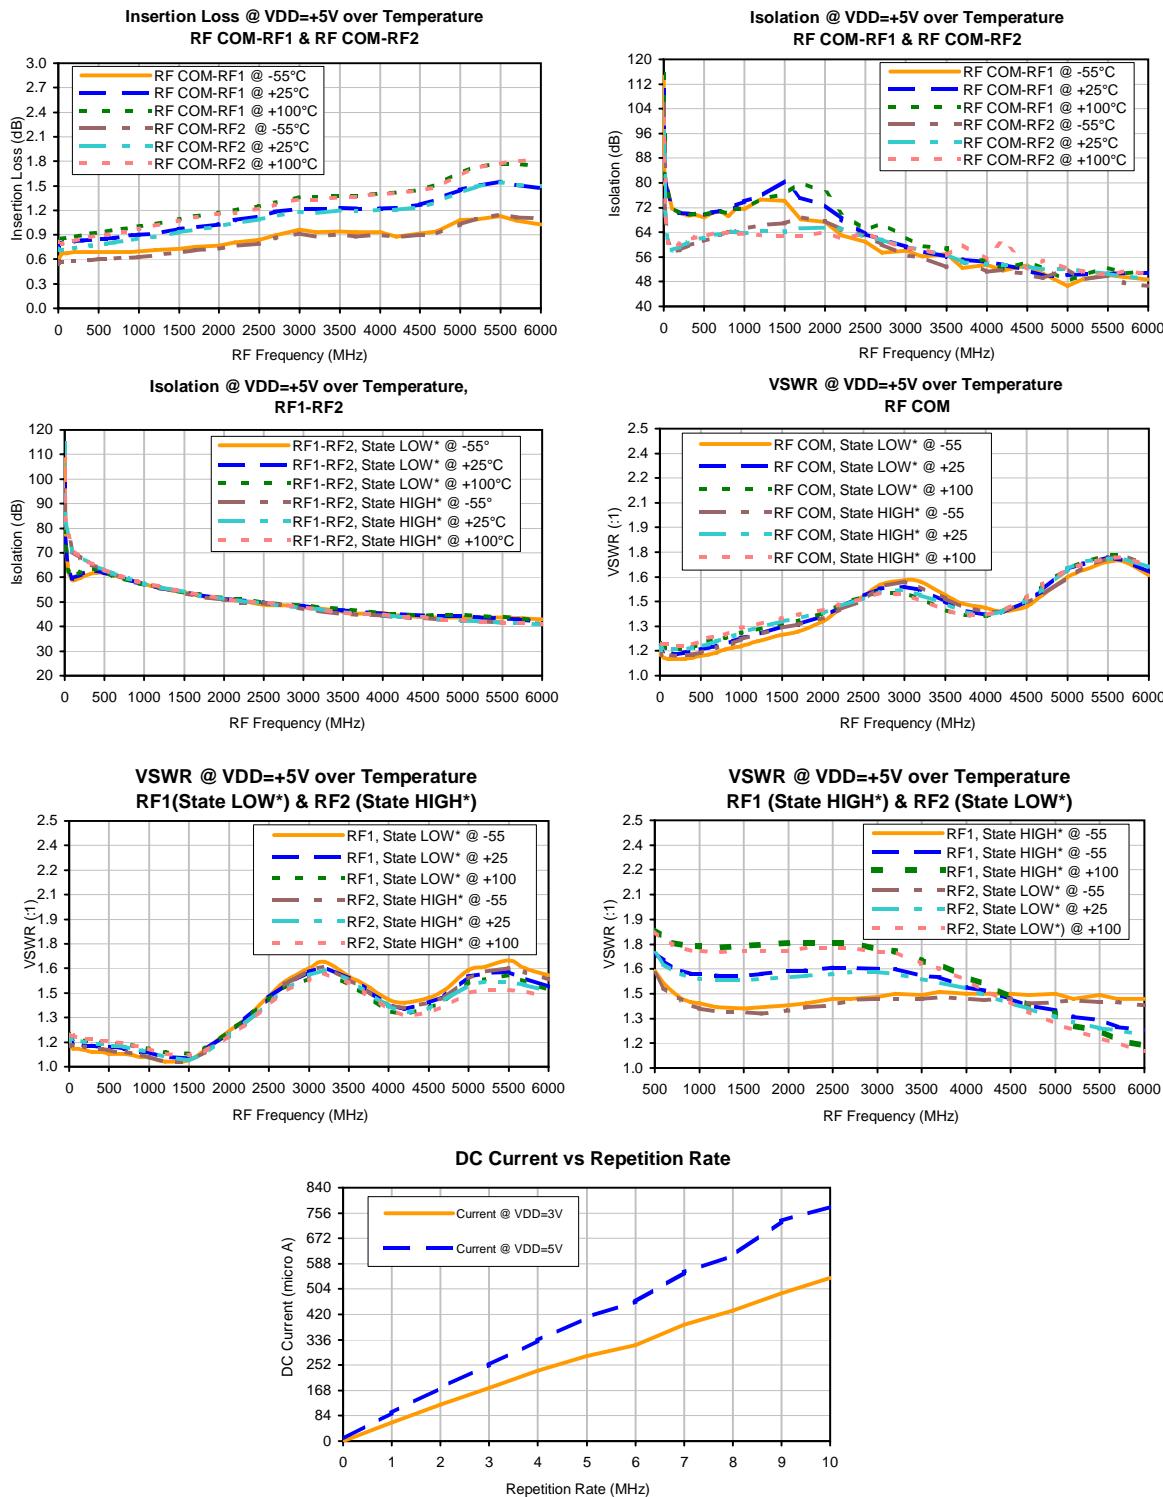

*Note


State of Control Voltage	RF Common to	
	RF1	RF2
LOW	ON	OFF
HIGH	OFF	ON
ON - Low insertion loss state		
OFF - Isolation state		

Case Style


DG

DG1235-1

Outline Dimensions

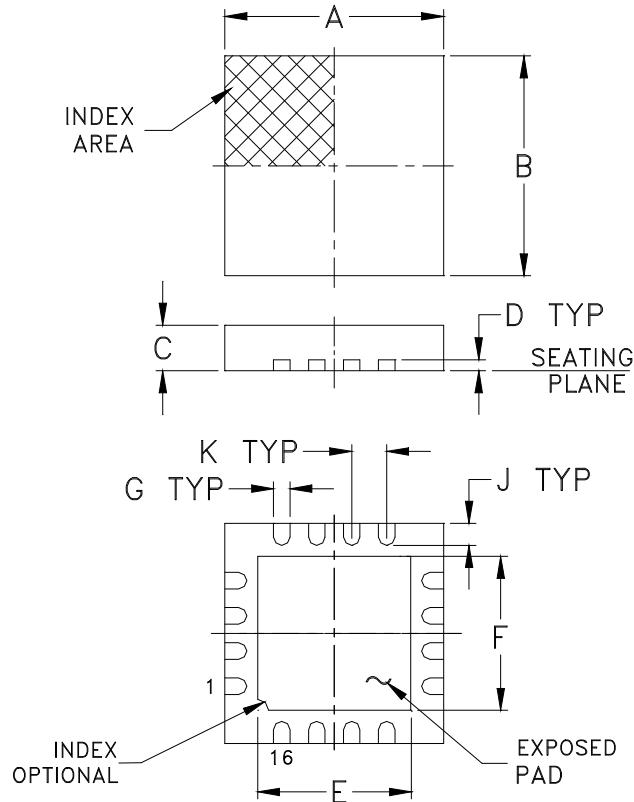

PCB Land Pattern

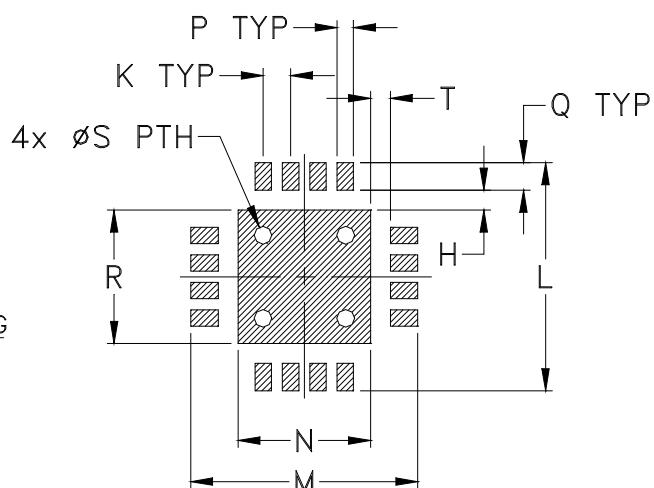

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K
DG1235-1	.157 (4.00)	.157 (4.00)	.035 (0.90)	.008 (0.20)	.106 (2.70)	.106 (2.70)	.012 (0.30)	.019 (0.48)	.016 (0.40)	.026 (0.65)

CASE #	L	M	N	P	Q	R	S	T	WT. GRAM
DG1235-1	.185 (4.70)	.185 (4.70)	.085 (2.16)	.014 (0.36)	.031 (0.79)	.085 (2.16)	.013 (0.33)	.019 (0.48)	.04

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Case material: Plastic.
2. Termination finish:
For RoHS Case Styles: NiPdAu. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

 **Mini-Circuits®**
ISO 9001 ISO 14001 CERTIFIED

ALL NEW

minicircuits.com


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS


THIRD ANGLE PROJECTION



REVISI

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M116142	NEW RELEASE	04/08/09	MMG	RD
A	M124875	MODIFIED LAYOUT, CHANGED "TB"	10/30/09	AV	RD
B	M153891	MODIFIED LAYOUT TO DG1235-1	01/22/16	ITG	RD

SUGGESTED MOUNTING CONFIGURATION FOR
DG1235-1 CASE STYLE, "16SW02" PIN CODE

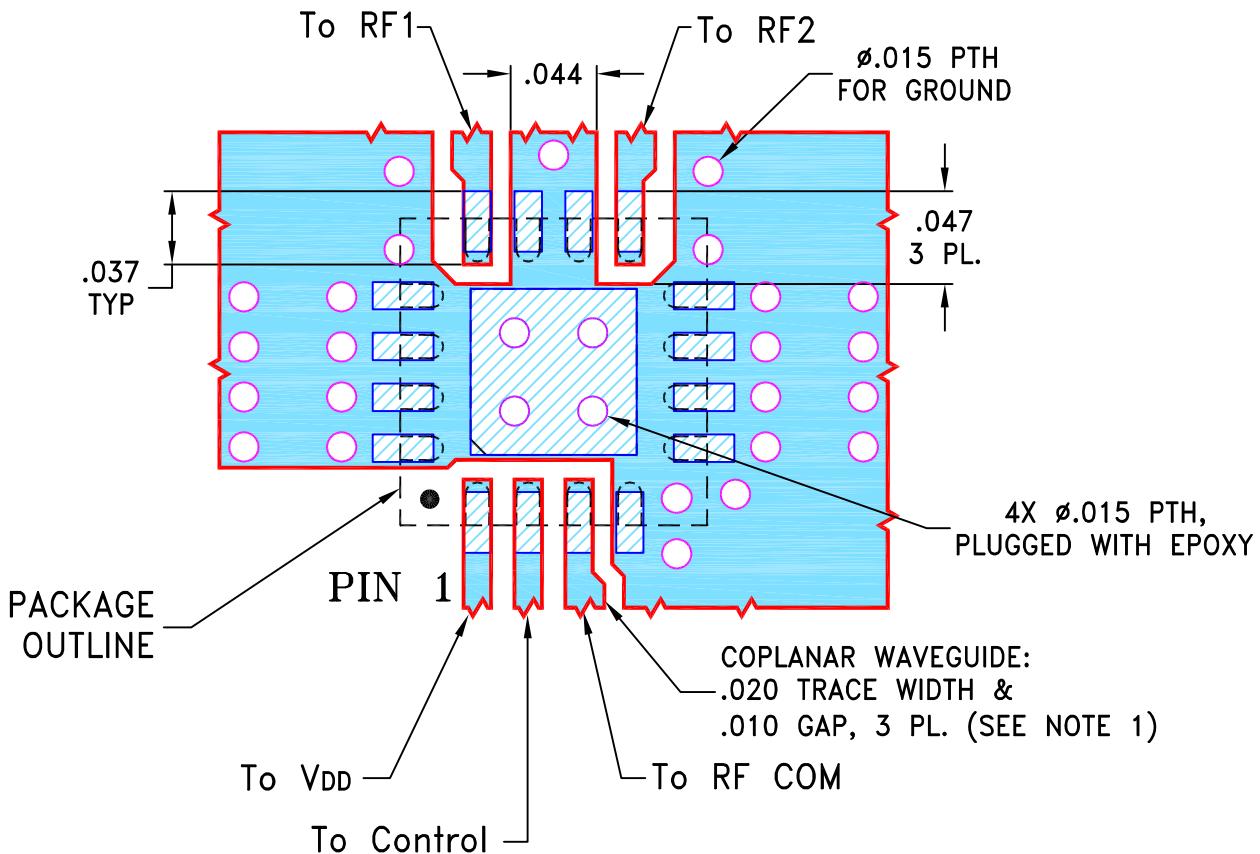NOTES:

1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS $.010 \pm .001$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC
(SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:

2 PL DECIMALS \pm 3 PL DECIMALS $\pm .005$ ANGLES \pm FRACTIONS \pm

INITIALS

DATE

DRAWN

MMG

04/08/09

CHECKED

IL

04/08/09

APPROVED

RD

04/08/09



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 16SW02, DG1235-1, TB-486+


SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-278	B
FILE:	98PL278	SCALE: 10:1	SHEET: 1 OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


Mini-Circuits®

ASHEETA1.DWG REV:A DATE:01/12/95

Evaluation Board and Circuit

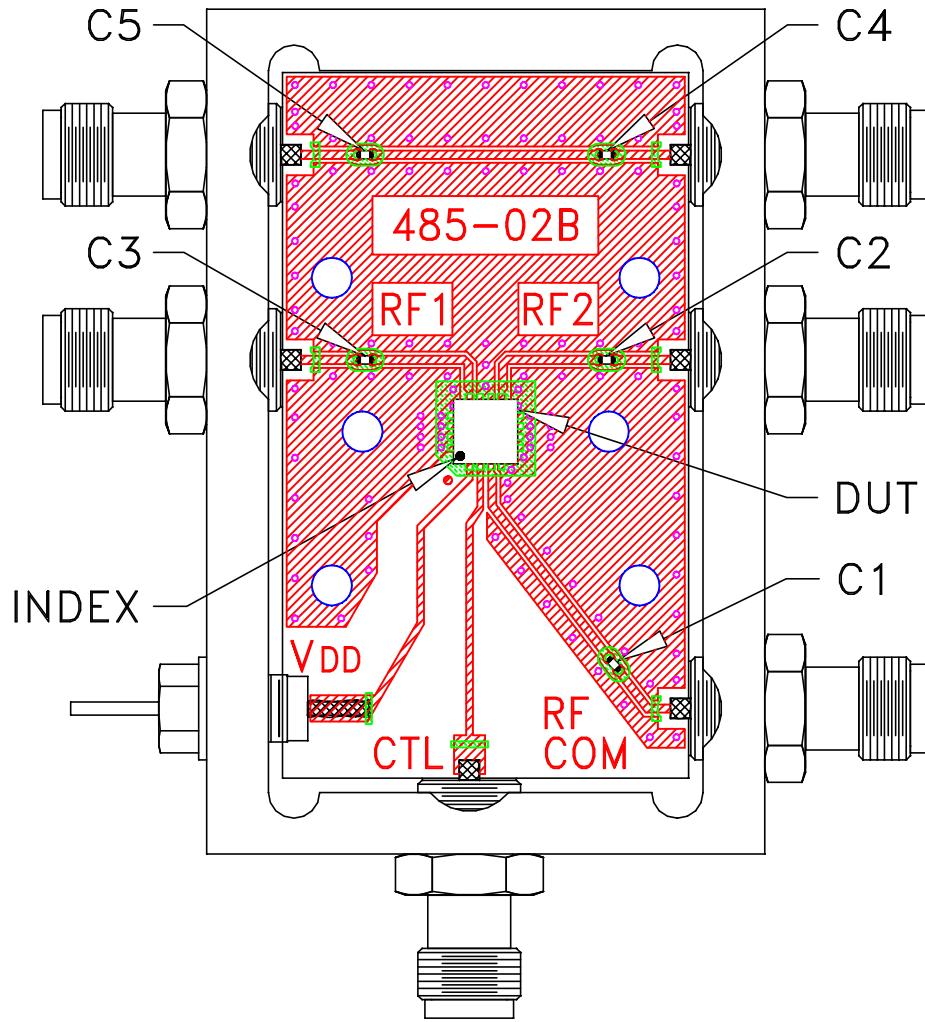

TB-486+

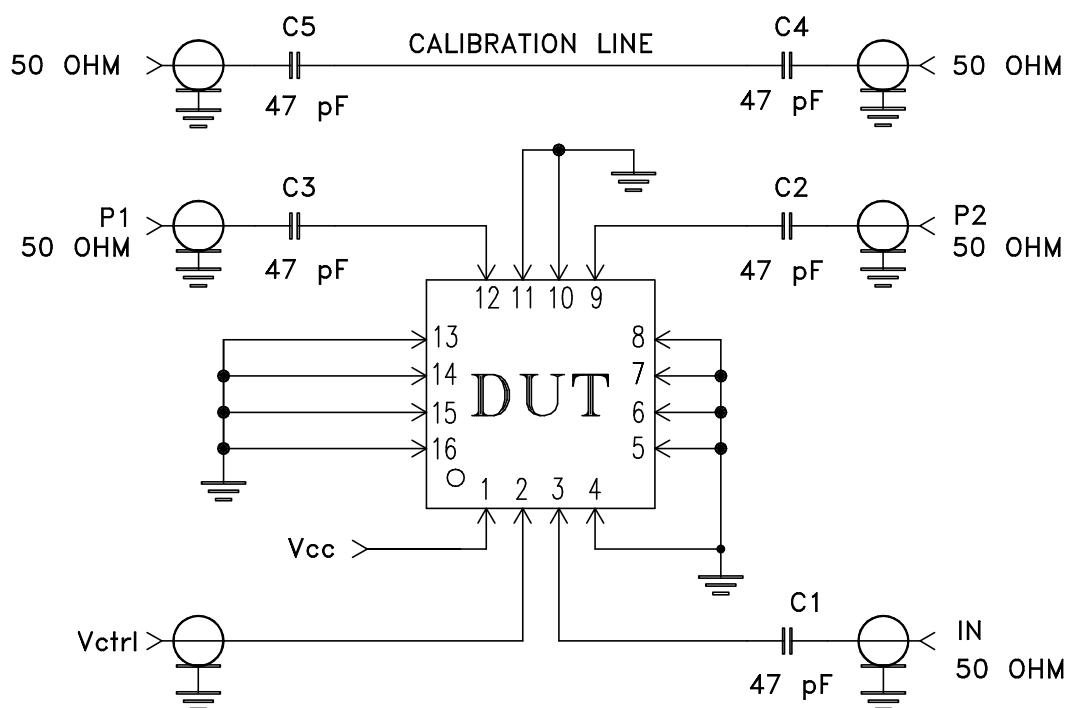

NOTES:

Schematic Diagram

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.010 inch.

Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Temperature Cycling	-65° to 150°C, 500 cycles	JESD22-A104, condition C
Autoclave	121°C, 100% RH, 30 PSIA, 96 hours, unbiased	JESD22-A102
High Temp Storage	150°C 1008 hours	JESD22-A103
Solderability	Per Reference Spec	JESD22-B102
Resistance to Solvent	Per Reference Spec	MIL-STD-202, Method 215J
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 260°C peak	JESD22-A113