



MMIC SURFACE MOUNT


# Low Pass Filter

# XLF-222H+

50Ω DC to 2200 MHz Reflectionless

## THE BIG DEAL

- Reflectionless Technology, Eliminates Reflections with 50Ω Match in Stopband
- Temperature Robust, up to +105°C Operation
- Compact Size, 4x4 mm 24-Lead QFN-Style Package
- Excellent Performance Repeatability



Generic photo used for illustration purposes only


## PATENTS

- Protected by US Patent Nos. 10,516,378, 10,374,577, 10,263,592, 10,230,348, 9,705,467, and 8,392,495
- Protected by China Patent Nos. 107078708B, and 102365784B
- Protected by Taiwan Patent Nos. 653826B, and 581494B

## APPLICATIONS

- Test and Measurement Equipment
- Radar Systems
- SatCom Systems
- Harmonic Suppression

## FUNCTIONAL DIAGRAM

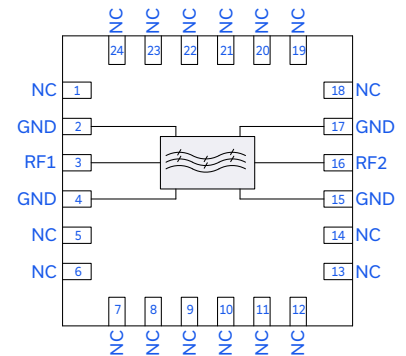

## PRODUCT OVERVIEW

Mini-Circuits' XLF-222H+ reflectionless filter employs a novel filter topology which absorbs and terminates stopband signals internally rather than reflecting them back to the source. This new capability enables unique applications for filter circuits beyond those suited to traditional approaches. Traditional filters are reflective in the stopband, sending signals back to the source at 100% of the power level. These reflections interact with neighboring components and often result in intermodulation products and other interferences. Reflectionless filters eliminate stopband reflections, allowing them to be paired with sensitive devices and used in applications that otherwise require circuits such as isolation amplifiers or attenuators.

## KEY FEATURES

Features	Advantages
Reflectionless Technology	Reflectionless filters absorb unwanted signals, preventing reflections back to the source. This reduces generation of additional unwanted signals without the need for extra components like attenuators, improving system dynamic range and saving board space.
50Ω Match in Stopband	Reflectionless filters maintain good impedance matching in the stopband, allowing for integration with high gain, wideband amplifiers without the risk of creating out of band instabilities.
Excellent RF Performance Repeatability	Fabricated on a GaAs process, X-series filters are inherently repeatable for large volume production.
Excellent Temperature Stability and Robustness	With ±0.3 dB variation over temperature, the XLF-222H+ is ideal for use in wide temperature range applications without the need for additional temperature compensation. Up to +105°C rating allows for suitable operation close to high power components.
Excellent Power Handling in a Compact Package <ul style="list-style-type: none"> <li>• Passband +37 dBm at +25°C</li> <li>• Stopband +29 dBm at +25°C</li> </ul>	High power handling extends the usability of these filters to the transmit path for inter-stage filtering. A compact, 4x4 mm 24-Lead QFN-style package enables replacement of filter/ attenuator pairs with a single reflectionless filter, saving board space in dense assemblies.






### ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC-2.2		1.5	2.9	dB
	Frequency Cut-Off	F2	2.4		3.0		dB
	Return Loss	DC-F1	DC-2.2		20.0		dB
Stopband	Rejection	F3-F4	4-6	34	43		dB
		F4-F5	6-10		52		
		F5-F6	10-20		42		
	Return Loss	F3-F4	4-6		15.9		dB
		F4-F5	6-10		15.0		
		F5-F6	10-20		8.0		







1. Tested on Mini-Circuits Characterization Test Board TB-XLF-222HC+. See Figure 2. De-embedded to the device reference plane.
2. Bi-directional RF1 and RF2 ports can be interchanged. See S-Parameters for actual performance.
3. All electrical specifications measured at RF Input Power = -10 dBm.

### TYPICAL FREQUENCY RESPONSE AT +25°C

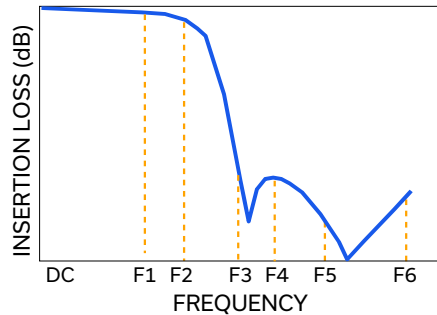



### TYPICAL PERFORMANCE GRAPHS

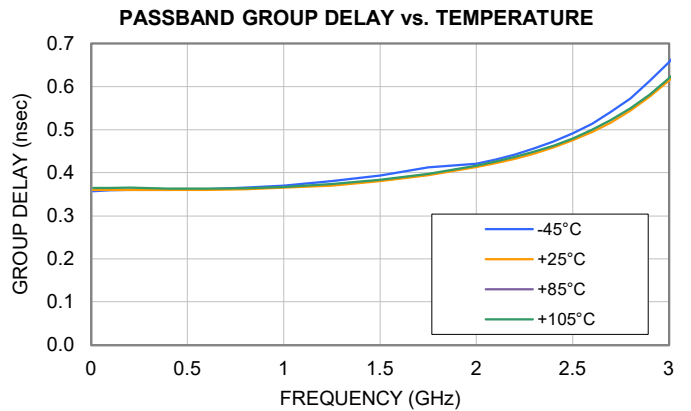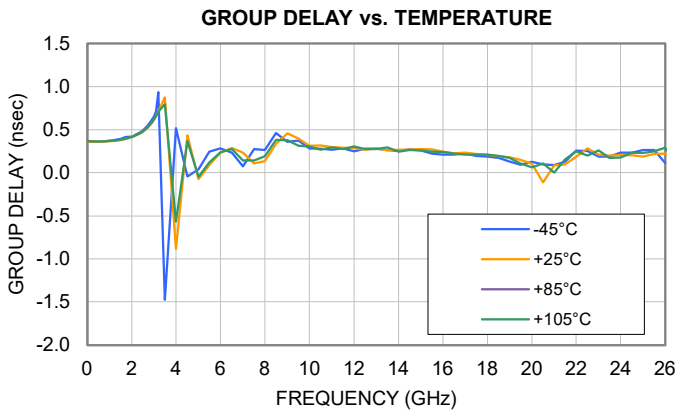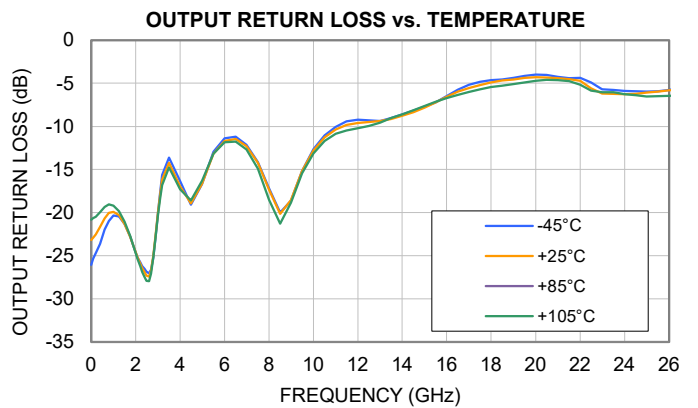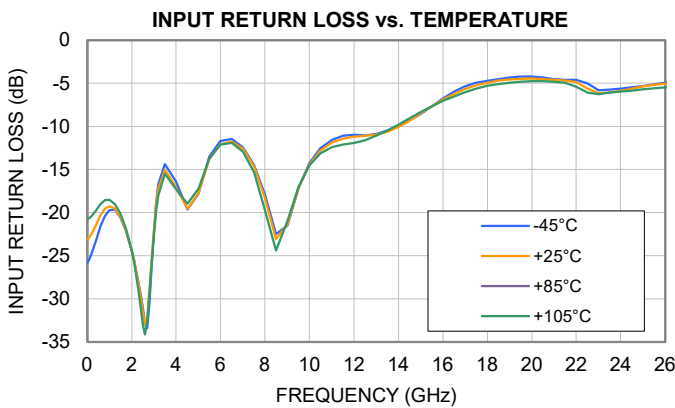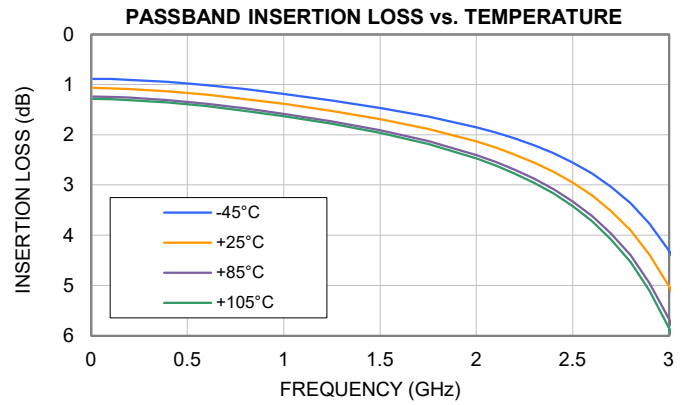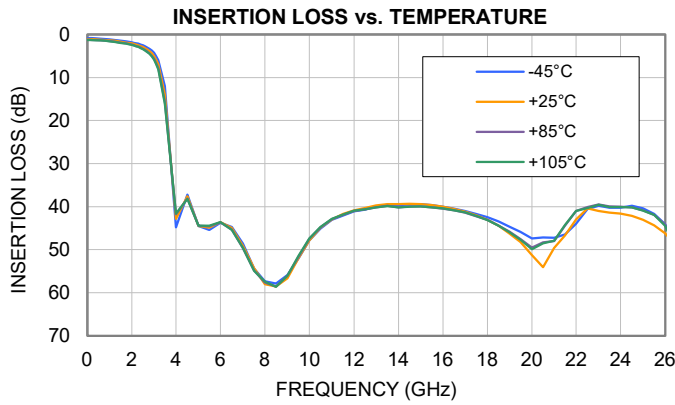

**ABSOLUTE MAXIMUM RATINGS<sup>4</sup>**

Parameter	Ratings
Operating Temperature	-45°C to +105°C
Storage Temperature	-65°C to +150°C
Input Power, Passband (DC to F2) <sup>5</sup>	+37 dBm
Input Power, Stopband (F3 to F6) <sup>6</sup>	+29 dBm

4. Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.

5. Power rating above +25°C operating temperature decreases linearly to +34 dBm at +105°C.

6. Power rating above +25°C operating temperature decreases linearly to +26 dBm at +105°C.

**THERMAL RESISTANCE**

Parameter	Ratings
Thermal Resistance ( $\Theta_{jc}$ ) <sup>7,8</sup>	6.7°C/W

7.  $\Theta_{jc}$  = (Hot Spot Temperature on Die - Temperature at Ground Lead)/Dissipated Power

8. Measured at 1 GHz with RF Input Power equal to 1 W.

**ESD RATING**

	Class	Voltage Range	Reference Standard
HBM	1B	500 V to < 1000 V	ANSI/ESDA/JEDEC JS-001-2017
CDM	C1	250 V to < 500 V	JESD22-C101F



**ESD HANDLING PRECAUTION:** This device is designed to be Class 1B for HBM. Static charges may easily produce potentials higher than this with improper handling and can discharge into DUT and damage it. As a preventive measure Industry standard ESD handling precautions should be used at all times to protect the device from ESD damage.

**MSL RATING**

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020E/JEDEC J-STD-033C



### FUNCTIONAL DIAGRAM

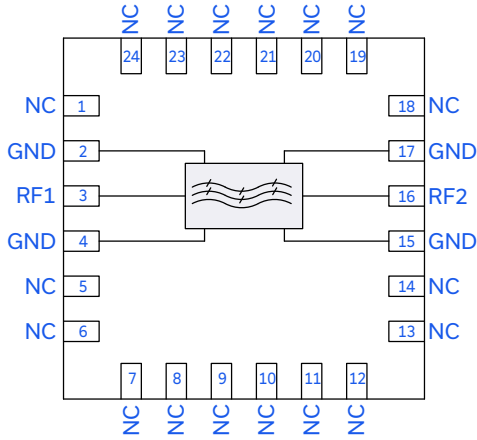


Figure 1. XLF-222H+ Functional Diagram

### PAD DESCRIPTION

Function	Pad Number	Description (Refer to Figure 2)
RF1	3	RF1 Pad connects to RF-Input port.
RF2	16	RF2 Pad connects to RF-Output port.
GND	2, 4, 15, 17, and Paddle	Connects to Ground.
NC	1, 5-14, 18-24	Not used internally.

### CHARACTERIZATION TEST BOARD

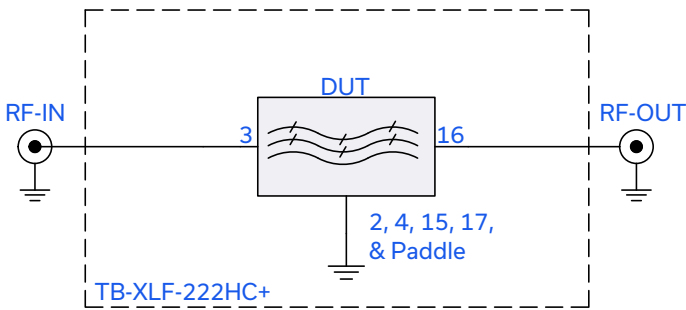


Figure 2. DUT soldered on Mini-Circuits Characterization Test Board TB-XLF-222HC+

### Electrical Parameters and Conditions


Passband Insertion Loss, Stopband Rejection, and Return Loss measured using N5242A PNA-X Microwave Network Analyzer.

#### Conditions:


1. RF Input Power = -10 dBm
2. XLF-222H+ is bi-directional. RF1 and RF2 are interchangeable.



### CASE STYLE DRAWING

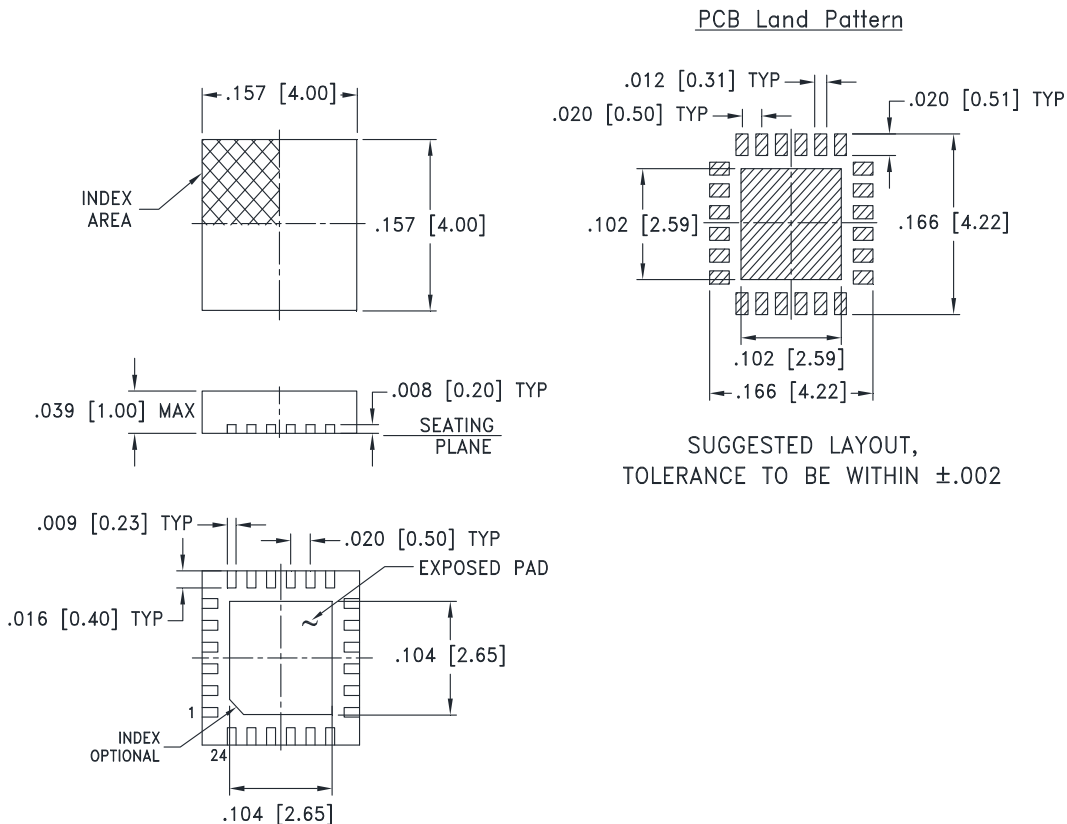

### PCB Land Pattern

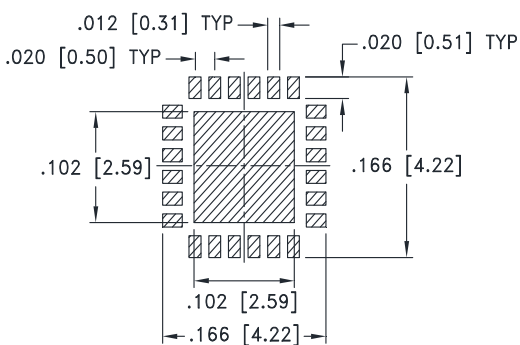


SUGGESTED LAYOUT, TOLERANCE TO BE WITHIN ±.002

Weight: .04 Grams

Dimensions are in inches [mm]. Tolerances in inches: 2 Pl. ± .01; 3 Pl. ± .005 inches

### PRODUCT MARKING

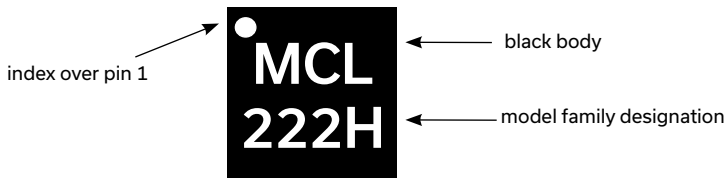

Marking may contain other features or characters for internal lot control



MMIC SURFACE MOUNT

# Low Pass Filter

## XLF-222H+

50Ω DC to 2200 MHz Reflectionless

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD

[CLICK HERE](#)

<b>Performance Data &amp; Graphs</b>	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
<b>Case Style</b>	DG1847. Plastic package, exposed paddle, Lead Finish: Matte-Tin
<b>RoHS Status</b>	Compliant
<b>Tape &amp; Reel</b> Standard quantities available on reel	F68 7" reels with 20, 50, 100, 200, 500 or 1K devices
<b>Suggested Layout for PCB Design</b>	PL-765
<b>Evaluation Board</b>	TB-XLF-222HC+ Gerber File
<b>Environmental Ratings</b>	ENV82

### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



*Typical Performance Data*

**NOTE: Use PDF Bookmarks to view DATA at required conditions**

**Definitions:**

Input Return Loss = S11 (dB)

Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)

TEST CONDITION: Temperature = +25°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	1.06	-23.1	-23.2	0.36
0.10	1.08	-22.9	-22.9	0.36
0.20	1.09	-22.5	-22.5	0.36
0.40	1.13	-21.4	-21.7	0.36
0.60	1.20	-20.3	-20.7	0.36
0.80	1.29	-19.5	-20.1	0.36
1.00	1.38	-19.3	-19.9	0.37
1.25	1.52	-19.5	-20.3	0.37
1.50	1.69	-20.5	-21.3	0.38
1.75	1.88	-22.1	-22.8	0.39
2.00	2.13	-24.4	-24.6	0.41
2.10	2.25	-25.5	-25.2	0.42
2.20	2.39	-26.7	-25.9	0.43
2.30	2.55	-28.1	-26.5	0.44
2.40	2.73	-29.7	-26.9	0.46
2.50	2.95	-31.5	-27.3	0.47
2.60	3.20	-32.9	-27.4	0.49
2.70	3.51	-32.2	-26.7	0.52
2.80	3.90	-28.9	-25.0	0.54
2.90	4.38	-25.2	-22.6	0.58
3.00	5.02	-21.9	-20.0	0.61
3.10	5.85	-19.2	-17.8	0.66
3.20	6.97	-17.2	-16.2	0.71
3.50	13.97	-15.0	-14.2	0.88
4.00	42.83	-17.1	-17.0	-0.88
4.50	37.66	-19.6	-19.0	0.43
5.00	44.56	-17.7	-16.7	-0.08
5.50	44.88	-13.8	-13.2	0.09
6.00	43.61	-12.1	-11.7	0.23
6.50	44.98	-11.8	-11.5	0.29
7.00	49.10	-12.6	-12.3	0.23
7.50	54.31	-14.6	-14.2	0.11
8.00	58.00	-18.3	-17.3	0.13
8.50	58.56	-23.1	-20.2	0.33
9.00	56.63	-21.4	-18.5	0.46
9.50	52.01	-17.2	-15.2	0.40
10.00	47.86	-14.4	-12.8	0.31
10.50	44.90	-12.8	-11.3	0.32
11.00	42.98	-11.9	-10.3	0.30
11.50	41.70	-11.4	-9.8	0.29
12.00	40.86	-11.2	-9.6	0.29
12.50	40.30	-11.1	-9.5	0.27
13.00	39.72	-10.9	-9.4	0.28
13.50	39.38	-10.6	-9.1	0.26
14.00	39.41	-10.1	-8.8	0.27
14.50	39.35	-9.3	-8.4	0.27
15.00	39.38	-8.5	-7.8	0.27
15.50	39.68	-7.7	-7.2	0.27
16.00	40.04	-6.9	-6.5	0.24
16.50	40.54	-6.2	-6.0	0.22
17.00	41.17	-5.7	-5.5	0.23
17.50	42.03	-5.2	-5.2	0.22
18.00	43.11	-4.9	-4.9	0.21
18.50	44.47	-4.7	-4.7	0.19
19.00	46.24	-4.6	-4.5	0.18
19.50	48.23	-4.5	-4.4	0.15
20.00	51.20	-4.5	-4.3	0.10
20.50	54.11	-4.5	-4.3	-0.11
21.00	49.62	-4.6	-4.4	0.09
21.50	46.71	-4.7	-4.5	0.10
22.00	42.94	-4.8	-4.7	0.18
22.50	40.47	-5.6	-5.6	0.28
23.00	41.08	-6.1	-6.2	0.21
23.50	41.42	-6.1	-6.2	0.20
24.00	41.63	-5.9	-6.3	0.20
24.50	42.14	-5.6	-6.2	0.20
25.00	43.06	-5.4	-6.1	0.19
25.50	44.31	-5.2	-5.9	0.22
26.00	46.16	-5.0	-5.8	0.22
26.50	49.11	-5.0	-5.7	0.19

*Typical Performance Data*

**NOTE: Use PDF Bookmarks to view DATA at required conditions**

**Definitions:**

Input Return Loss = S11 (dB)

Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)

TEST CONDITION: Temperature = -45°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	0.88	-25.9	-26.0	0.36
0.10	0.89	-25.4	-25.3	0.36
0.20	0.91	-24.8	-24.7	0.36
0.40	0.95	-23.2	-23.6	0.36
0.60	1.01	-21.6	-22.0	0.36
0.80	1.09	-20.4	-21.0	0.36
1.00	1.19	-19.7	-20.3	0.37
1.25	1.32	-19.7	-20.5	0.37
1.50	1.46	-20.6	-21.3	0.38
1.75	1.63	-22.1	-22.8	0.39
2.00	1.85	-24.5	-24.6	0.41
2.10	1.95	-25.6	-25.2	0.42
2.20	2.07	-26.8	-25.8	0.43
2.30	2.21	-28.1	-26.2	0.44
2.40	2.37	-29.4	-26.5	0.46
2.50	2.55	-31.1	-26.9	0.47
2.60	2.77	-32.8	-27.0	0.49
2.70	3.03	-33.4	-26.6	0.51
2.80	3.36	-30.5	-25.2	0.54
2.90	3.77	-26.0	-22.9	0.57
3.00	4.31	-22.1	-20.1	0.61
3.10	5.02	-19.0	-17.6	0.66
3.20	5.98	-16.7	-15.7	0.71
3.50	12.03	-14.4	-13.6	0.93
4.00	44.82	-16.4	-16.4	-1.47
4.50	37.22	-19.7	-19.1	0.52
5.00	44.55	-17.8	-16.7	-0.04
5.50	45.43	-13.5	-12.9	0.04
6.00	43.70	-11.7	-11.4	0.25
6.50	44.74	-11.5	-11.2	0.29
7.00	48.65	-12.5	-12.1	0.23
7.50	54.38	-14.5	-14.1	0.07
8.00	57.31	-17.9	-17.2	0.27
8.50	57.83	-22.5	-20.0	0.26
9.00	55.90	-21.5	-18.7	0.46
9.50	52.07	-17.2	-15.2	0.36
10.00	47.90	-14.3	-12.6	0.37
10.50	45.05	-12.5	-11.0	0.28
11.00	43.08	-11.6	-10.0	0.28
11.50	42.04	-11.1	-9.4	0.27
12.00	41.10	-10.9	-9.2	0.28
12.50	40.70	-11.0	-9.3	0.25
13.00	39.98	-10.9	-9.4	0.28
13.50	39.53	-10.5	-9.1	0.28
14.00	39.64	-9.9	-8.6	0.26
14.50	39.45	-9.3	-8.2	0.25
15.00	39.41	-8.6	-7.7	0.27
15.50	39.64	-7.7	-7.2	0.26
16.00	40.05	-6.8	-6.5	0.22
16.50	40.48	-6.0	-5.7	0.21
17.00	40.99	-5.4	-5.2	0.21
17.50	41.70	-5.0	-4.8	0.23
18.00	42.51	-4.7	-4.6	0.19
18.50	43.44	-4.5	-4.5	0.19
19.00	44.65	-4.3	-4.4	0.17
19.50	45.91	-4.2	-4.1	0.13
20.00	47.39	-4.2	-4.0	0.09
20.50	47.14	-4.3	-4.0	0.13
21.00	47.26	-4.5	-4.2	0.10
21.50	46.42	-4.6	-4.4	0.09
22.00	43.97	-4.6	-4.4	0.13
22.50	40.57	-5.0	-4.9	0.26
23.00	39.81	-5.8	-5.7	0.25
23.50	40.25	-5.7	-5.8	0.19
24.00	40.22	-5.6	-5.9	0.19
24.50	39.82	-5.5	-5.9	0.23
25.00	40.46	-5.3	-6.0	0.23
25.50	41.67	-5.1	-5.9	0.26
26.00	44.07	-4.9	-5.8	0.26
26.50	49.10	-4.7	-5.5	0.11

*Typical Performance Data*

**NOTE: Use PDF Bookmarks to view DATA at required conditions**

**Definitions:**

Input Return Loss = S11 (dB)

Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)

TEST CONDITION: Temperature = +85°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	1.24	-21.2	-21.3	0.36
0.10	1.24	-21.1	-21.1	0.36
0.20	1.26	-20.9	-20.9	0.36
0.40	1.31	-20.1	-20.3	0.36
0.60	1.38	-19.3	-19.7	0.36
0.80	1.47	-18.8	-19.3	0.36
1.00	1.58	-18.7	-19.4	0.37
1.25	1.73	-19.1	-20.0	0.37
1.50	1.91	-20.2	-21.1	0.38
1.75	2.13	-21.9	-22.7	0.40
2.00	2.41	-24.4	-24.6	0.42
2.10	2.54	-25.7	-25.3	0.42
2.20	2.70	-27.1	-26.0	0.44
2.30	2.87	-28.8	-26.7	0.45
2.40	3.08	-30.7	-27.2	0.46
2.50	3.32	-32.7	-27.6	0.48
2.60	3.61	-33.7	-27.7	0.50
2.70	3.96	-32.4	-26.8	0.52
2.80	4.40	-29.0	-25.0	0.55
2.90	4.95	-25.4	-22.6	0.58
3.00	5.67	-22.3	-20.3	0.62
3.10	6.61	-19.7	-18.2	0.66
3.20	7.87	-17.9	-16.7	0.71
3.50	15.62	-15.4	-14.7	0.82
4.00	41.79	-17.2	-17.3	-0.62
4.50	38.08	-19.1	-18.7	0.38
5.00	44.48	-17.3	-16.5	-0.04
5.50	44.59	-13.7	-13.2	0.12
6.00	43.66	-12.1	-11.8	0.26
6.50	45.35	-11.9	-11.7	0.26
7.00	49.63	-12.8	-12.5	0.18
7.50	54.83	-15.2	-14.7	0.19
8.00	57.66	-19.3	-18.2	0.32
8.50	58.58	-24.1	-21.0	0.26
9.00	56.06	-21.1	-18.8	0.44
9.50	51.66	-17.0	-15.4	0.38
10.00	47.44	-14.4	-13.0	0.38
10.50	44.81	-12.9	-11.5	0.29
11.00	42.89	-12.2	-10.7	0.30
11.50	41.90	-11.9	-10.3	0.24
12.00	40.95	-11.8	-10.1	0.29
12.50	40.64	-11.5	-9.9	0.27
13.00	40.15	-11.1	-9.6	0.27
13.50	39.84	-10.6	-9.1	0.27
14.00	40.13	-9.9	-8.7	0.27
14.50	39.96	-9.2	-8.2	0.26
15.00	39.95	-8.4	-7.7	0.25
15.50	40.17	-7.6	-7.2	0.25
16.00	40.51	-7.0	-6.7	0.24
16.50	40.84	-6.4	-6.3	0.24
17.00	41.37	-5.9	-5.9	0.21
17.50	42.20	-5.5	-5.5	0.23
18.00	43.13	-5.2	-5.3	0.19
18.50	44.38	-5.0	-5.1	0.18
19.00	45.81	-4.8	-5.0	0.16
19.50	47.56	-4.7	-4.8	0.11
20.00	49.54	-4.7	-4.6	0.02
20.50	48.32	-4.7	-4.6	0.12
21.00	47.99	-4.8	-4.6	0.02
21.50	44.40	-5.0	-4.8	0.16
22.00	41.02	-5.4	-5.1	0.23
22.50	40.12	-6.1	-5.9	0.21
23.00	39.49	-6.3	-6.1	0.24
23.50	39.98	-6.1	-6.1	0.20
24.00	40.04	-5.9	-6.2	0.19
24.50	40.15	-5.8	-6.3	0.22
25.00	40.85	-5.6	-6.4	0.21
25.50	41.93	-5.4	-6.3	0.24
26.00	44.16	-5.4	-6.3	0.28
26.50	49.19	-5.3	-6.2	0.12

*Typical Performance Data*

**NOTE: Use PDF Bookmarks to view DATA at required conditions**

**Definitions:**

Input Return Loss = S11 (dB)







Insertion Loss = -S21 (dB)

Output Return Loss = S22 (dB)


TEST CONDITION: Temperature = +105°C

FREQ	Insertion Loss	Input Return Loss	Output Return Loss	Group Delay
(GHz)	(dB)	(dB)	(dB)	(nsec)
0.01	1.29	-20.7	-20.8	0.36
0.10	1.29	-20.6	-20.7	0.36
0.20	1.31	-20.4	-20.5	0.36
0.40	1.36	-19.7	-19.9	0.36
0.60	1.43	-19.0	-19.4	0.36
0.80	1.52	-18.6	-19.0	0.36
1.00	1.63	-18.5	-19.2	0.37
1.25	1.78	-19.0	-19.8	0.37
1.50	1.96	-20.1	-21.1	0.38
1.75	2.18	-21.8	-22.7	0.40
2.00	2.47	-24.4	-24.7	0.42
2.10	2.61	-25.7	-25.5	0.43
2.20	2.77	-27.2	-26.2	0.44
2.30	2.95	-29.0	-26.9	0.45
2.40	3.17	-31.0	-27.5	0.46
2.50	3.42	-33.1	-27.9	0.48
2.60	3.72	-34.2	-28.0	0.50
2.70	4.08	-32.8	-27.1	0.52
2.80	4.53	-29.3	-25.2	0.55
2.90	5.11	-25.7	-22.8	0.58
3.00	5.85	-22.5	-20.4	0.62
3.10	6.82	-19.9	-18.3	0.66
3.20	8.13	-18.0	-16.8	0.71
3.50	16.08	-15.5	-14.7	0.80
4.00	41.57	-17.3	-17.3	-0.57
4.50	38.19	-19.0	-18.6	0.37
5.00	44.38	-17.2	-16.3	-0.05
5.50	44.49	-13.7	-13.2	0.12
6.00	43.59	-12.1	-11.9	0.23
6.50	45.40	-11.9	-11.7	0.27
7.00	49.62	-12.9	-12.7	0.14
7.50	54.92	-15.3	-14.9	0.14
8.00	57.41	-19.7	-18.5	0.19
8.50	58.65	-24.4	-21.3	0.38
9.00	56.09	-21.0	-18.8	0.37
9.50	51.46	-17.0	-15.4	0.32
10.00	47.42	-14.5	-13.1	0.30
10.50	44.74	-13.1	-11.7	0.27
11.00	42.84	-12.4	-10.9	0.29
11.50	41.86	-12.1	-10.5	0.27
12.00	40.94	-11.9	-10.2	0.31
12.50	40.62	-11.6	-9.9	0.27
13.00	40.17	-11.1	-9.6	0.27
13.50	39.90	-10.5	-9.1	0.29
14.00	40.15	-9.8	-8.6	0.25
14.50	39.99	-9.1	-8.1	0.26
15.00	39.93	-8.3	-7.6	0.26
15.50	40.14	-7.6	-7.1	0.25
16.00	40.45	-7.0	-6.7	0.24
16.50	40.83	-6.5	-6.4	0.22
17.00	41.35	-6.1	-6.0	0.21
17.50	42.15	-5.6	-5.7	0.21
18.00	43.19	-5.3	-5.4	0.21
18.50	44.42	-5.1	-5.2	0.19
19.00	45.99	-4.9	-5.1	0.17
19.50	47.68	-4.8	-4.9	0.10
20.00	49.91	-4.8	-4.7	0.06
20.50	48.54	-4.8	-4.6	0.11
21.00	47.96	-4.8	-4.6	0.00
21.50	44.23	-5.0	-4.8	0.15
22.00	40.95	-5.4	-5.2	0.25
22.50	40.28	-6.1	-5.8	0.20
23.00	39.55	-6.3	-6.0	0.26
23.50	40.06	-6.1	-6.1	0.17
24.00	40.12	-5.9	-6.2	0.18
24.50	40.17	-5.8	-6.4	0.23
25.00	40.89	-5.7	-6.5	0.23
25.50	41.93	-5.6	-6.5	0.25
26.00	44.42	-5.5	-6.5	0.29
26.50	49.67	-5.4	-6.4	0.13

## Typical Performance Curves

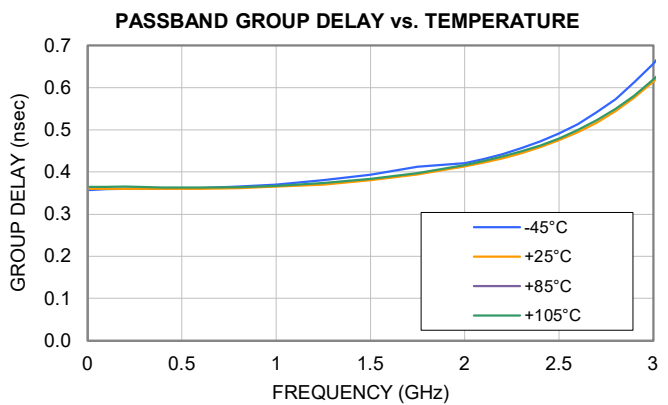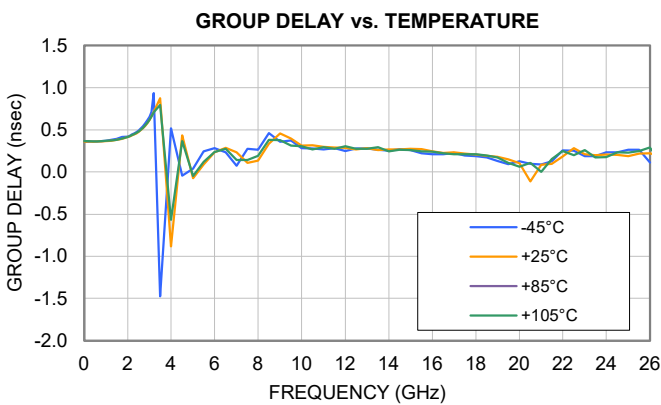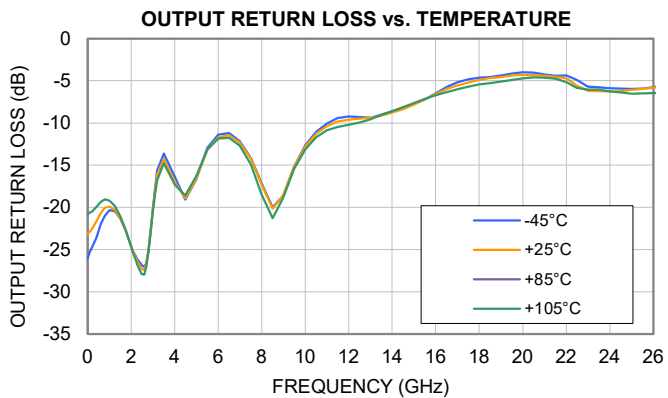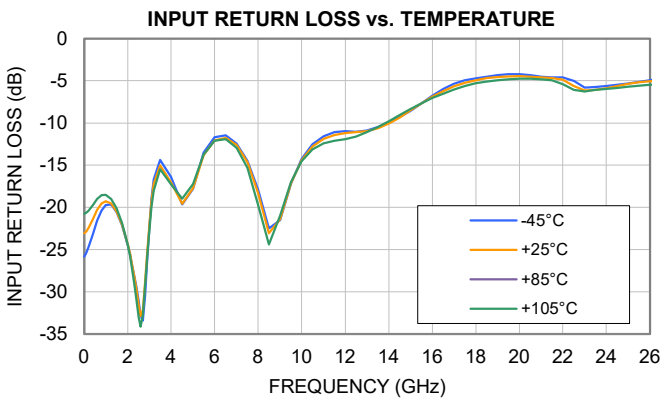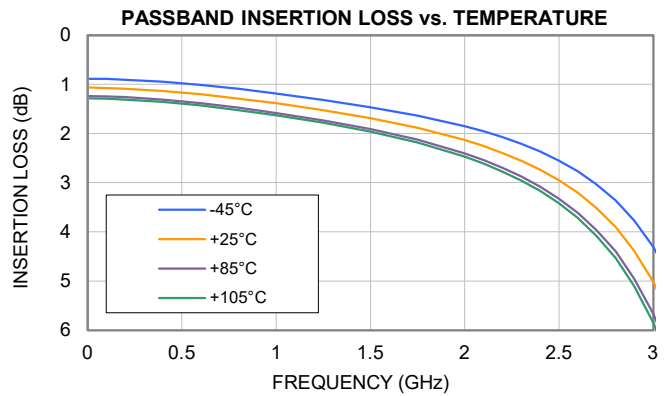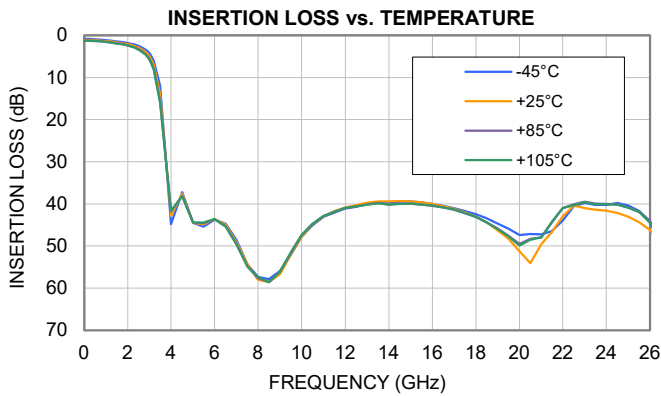

### Outline Dimensions

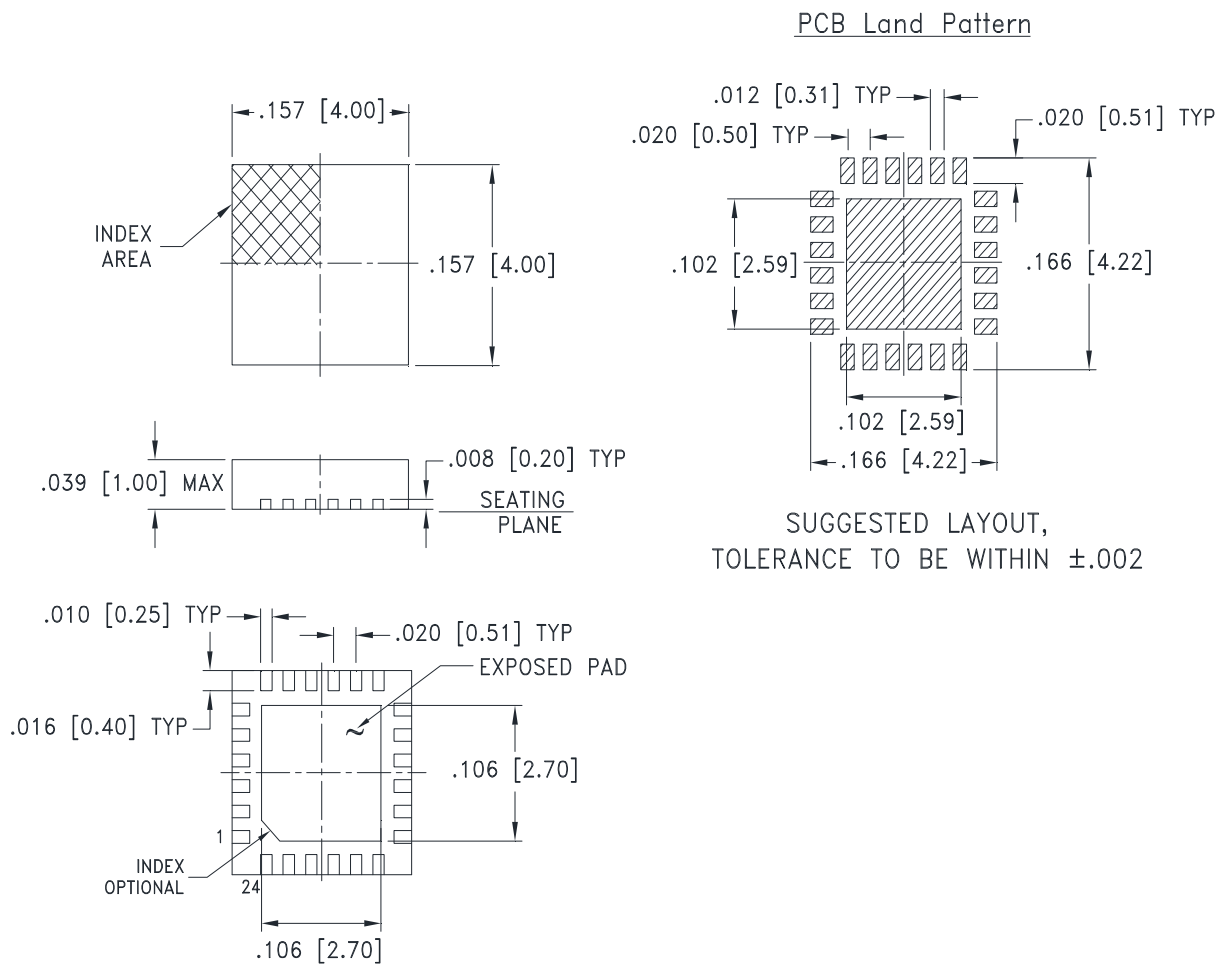

**Weight: .04 Grams**

**Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm$  .01; 3 Pl.  $\pm$  .005**

#### Notes:

1. Case material: Plastic.
2. Termination finish:
  - For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin. All models, (+) suffix. See model Data sheet.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS


DG1847 Rev.: AJ (27 FEB 26) ECO-028636 File: DG1847

This document and its contents are the property of Mini-Circuits.

Sheet 1 of 1

# Tape & Reel Packaging TR-F68

## DEVICE ORIENTATION IN T&R

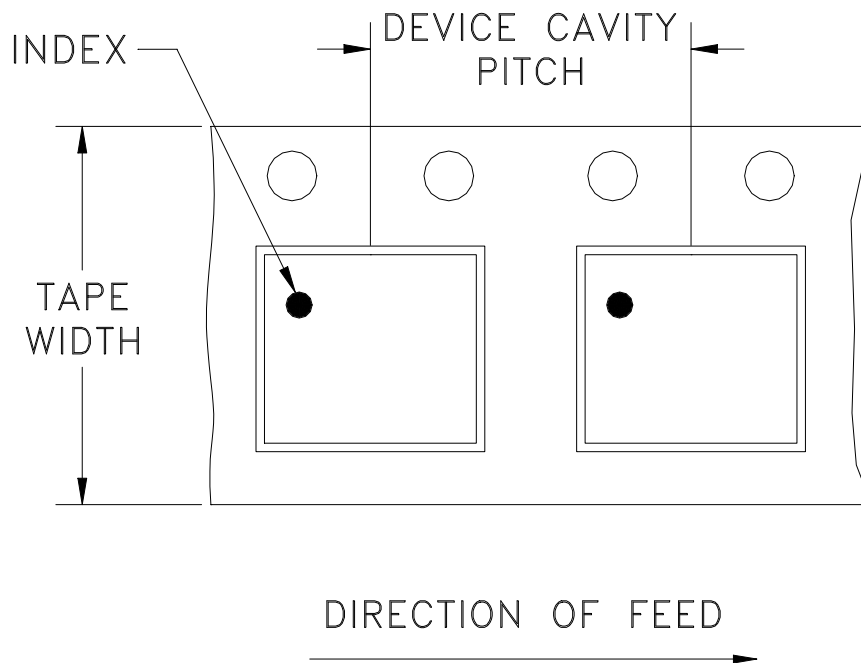

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
12	8	7	Small quantity standard	20
				50
				100
				200
				500
		7	Standard	1000
		13	Standard	2000
				3000
4000				

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-019651	NEW RELEASE	10/24/23	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR  
DG1847 CASE STYLE

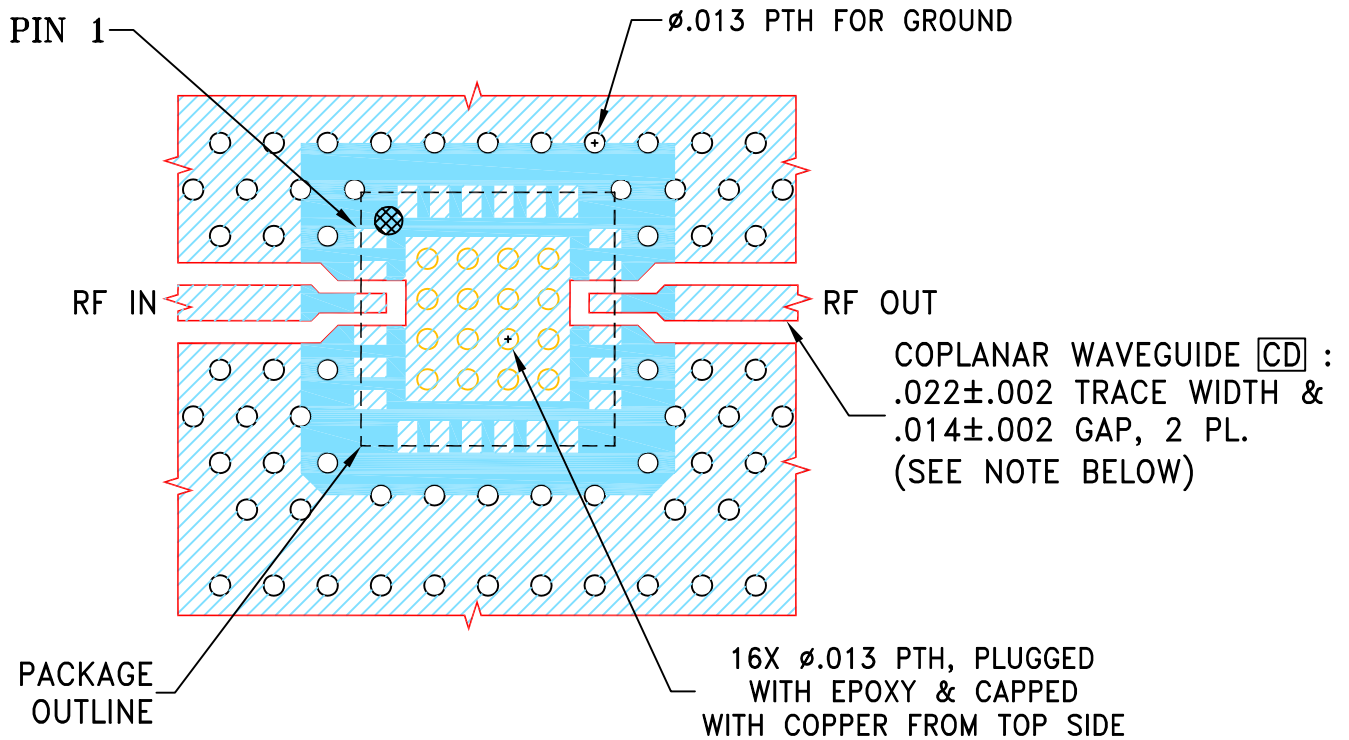

NOTES:

1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B, DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES	DRAWN	ITG	10/24/23
TOLERANCES ON:	CHECKED	GF	10/24/23
2 PL DECIMALS ±	APPROVED	IL	10/24/23
3 PL DECIMALS ± .005			
ANGLES ±			
FRACTIONS ±			



**Mini-Circuits®**


13 Neptune Avenue  
Brooklyn NY 11235

PL, DG1847, TB-XLF-222HC+


Mini-Circuits®  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-765	OR
FILE:	98PL765	SCALE: 8:1	SHEET: 1 OF 1

# Evaluation Board and Circuit

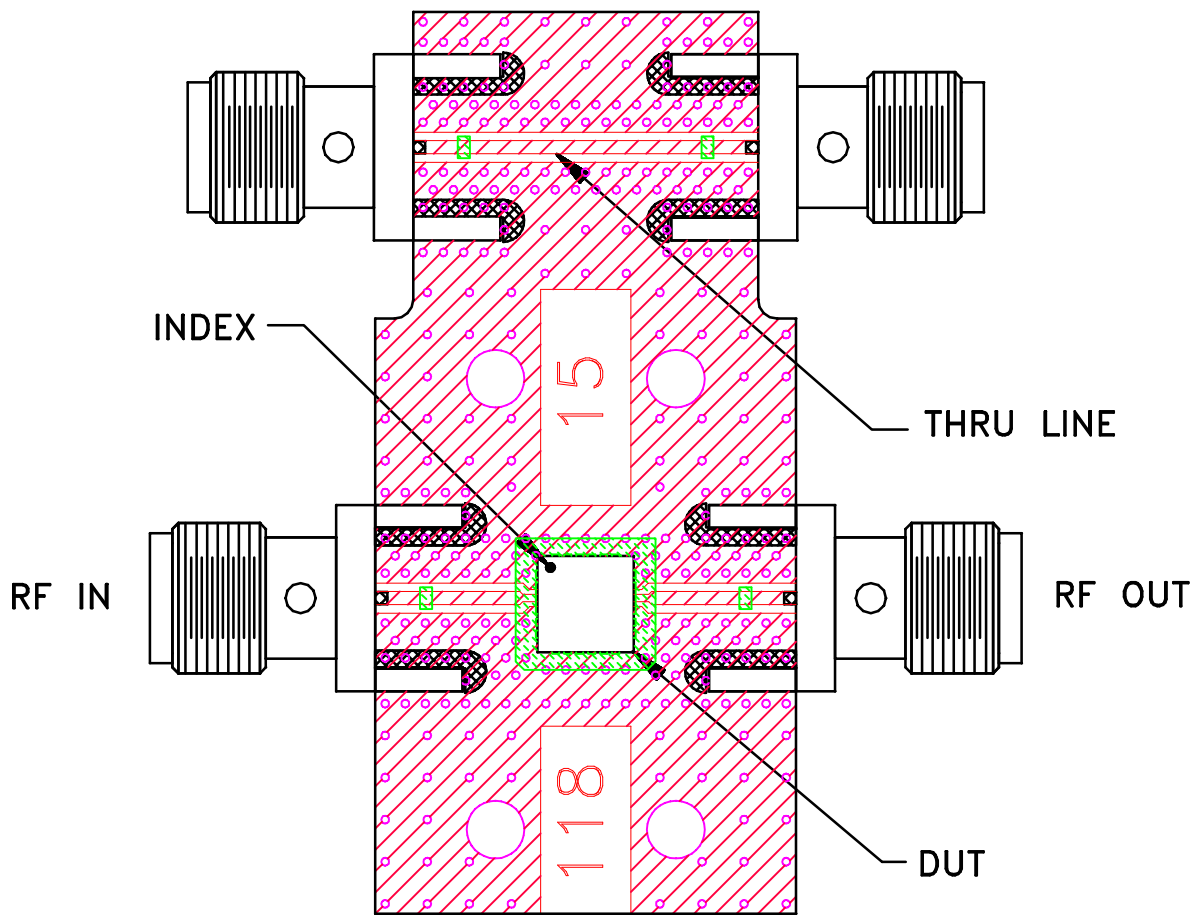

TB-XLF-222HC+

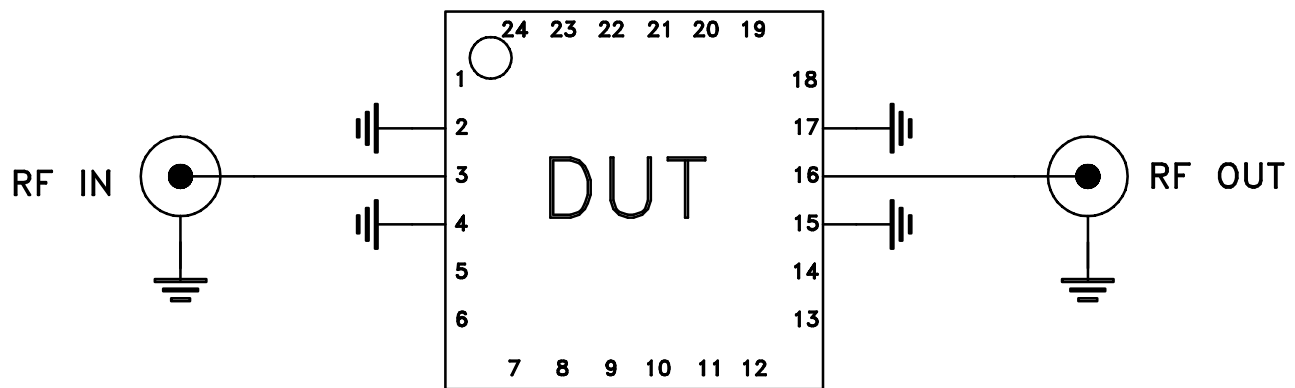

PINS 1,5-14,18-24 - NOT CONNECTED.

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.010 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-65° to 150° C Ambient Environment	Individual Model Data Sheet
Autoclave	15 psig, 100% RH, 121°C, 96 hours	JESD22-A102-C, Condition C
Temperature Cycling	-65° to 150°C, 100 cycles	JESD22-A104
Temperature Humidity	85°C/ 85% RH, 168 hours	JESD22-113
Solder Reflow Heat	Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak	J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1
Moisture Sensitivity: Level 1	Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 240°C peak (Non-RoHS) or 260°C (RoHS)	J-STD-020C
Solderability	10X magnification, 95% coverage	JESD22-B102, Method 1: Dip and Look Test
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215