Engineering Development Model

Directional Coupler ZADC-ED10208/1

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability.
At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : FM587

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		**Min.**	**Typ.**	**Max.**	**Units**
Frequency		400		2700	MHz
Coupling	**Nominal**		13.0 ± 1.0		dB
	Flatness		± 0.5		dB
Mainline Loss **	**400-2700 MHz**		0.80		dB
Directivity	**400-2700 MHz**		20		dB
VSWR	**400-2700 MHz**		1.3		(:1)
RF Power Input	**400-2700 MHz**			1.0	W

Note: ** Mainline loss includes theoretical coupled power loss of 0.223 dB at 13 dB coupling.

MAXIMUM RATINGS	
Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C

COAXIAL CONNECTIONS	
INPUT	1
OUTPUT	2
COUPLED FORWARD	3

Electrical Schematic

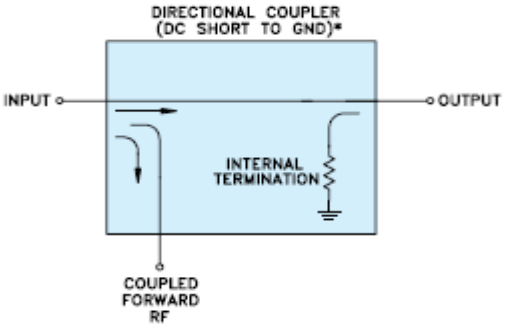

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Directional Coupler ZADC-ED10208/1

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	COUPLING (dB)	DIRECTIVITY (dB)	RETURN LOSS (dB)		
				IN	OUT	CPL
400.0	1.05	13.13	14.12	9.16	8.70	9.17
440.0	1.04	13.23	14.84	9.85	9.39	9.80
480.0	0.89	13.16	15.57	10.52	10.04	10.38
520.0	0.90	13.23	16.28	11.15	10.64	10.92
560.0	0.80	13.17	16.97	11.73	11.23	11.41
600.0	0.81	13.23	17.65	12.31	11.80	11.87
640.0	0.74	13.20	18.32	12.85	12.33	12.29
680.0	0.75	13.20	18.99	13.34	12.85	12.67
720.0	0.72	13.20	19.69	13.87	13.40	13.05
760.0	0.68	13.16	20.33	14.40	13.91	13.40
800.0	0.67	13.15	21.04	14.90	14.42	13.71
850.0	0.67	13.17	21.93	15.51	15.13	14.11
900.0	0.66	13.10	22.78	16.23	15.88	14.54
960.0	0.63	13.06	23.89	16.99	16.66	14.99
1020.0	0.71	13.10	25.13	18.16	17.72	15.56
1080.0	0.62	12.98	26.31	19.08	18.58	16.05
1140.0	0.69	13.05	27.71	20.33	19.67	16.65
1200.0	0.67	12.98	29.09	21.62	20.73	17.20
1300.0	0.68	12.94	31.77	23.32	22.33	18.12
1400.0	0.70	12.93	34.42	24.75	23.72	19.11
1500.0	0.72	12.94	33.94	26.21	24.07	20.42
1600.0	0.75	12.98	30.70	28.58	23.78	22.23
1700.0	0.74	12.99	27.22	30.69	23.10	24.00
1760.0	0.80	12.97	25.29	30.48	22.59	24.58
1820.0	0.79	13.02	23.58	31.06	21.97	24.60
1880.0	0.84	13.00	22.05	30.55	21.38	24.16
1940.0	0.83	13.06	20.65	31.95	20.90	23.52
2000.0	0.83	13.10	19.33	32.99	20.50	22.76
2100.0	0.88	13.16	17.36	36.24	19.74	21.26
2200.0	0.95	13.19	15.52	39.09	19.62	19.36
2300.0	1.03	13.21	13.89	42.94	19.70	17.39
2400.0	1.04	13.31	12.35	38.75	19.88	15.74
2500.0	1.05	13.48	10.95	33.13	19.81	14.51
2600.0	1.04	13.70	9.63	25.95	19.91	13.49
2700.0	1.06	13.82	8.42	22.14	19.70	12.50

Typical Performance Curves

Insertion Loss

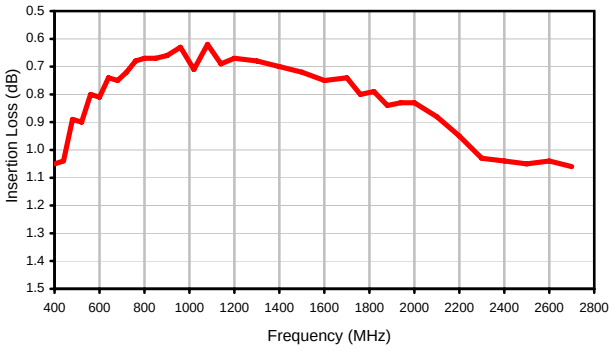

Coupling

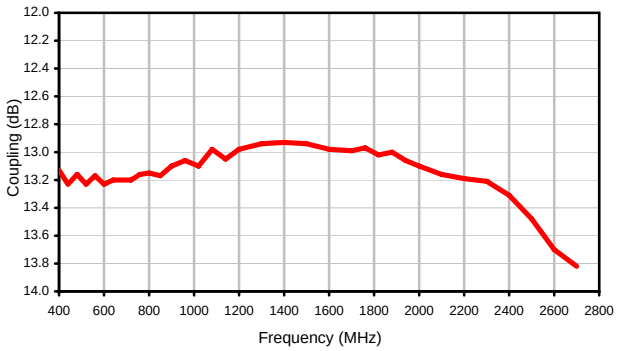

Directivity

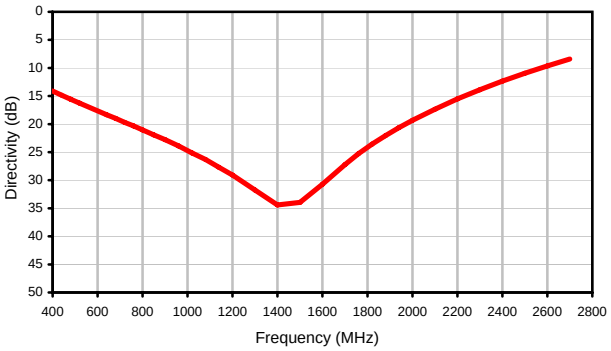

Return Loss

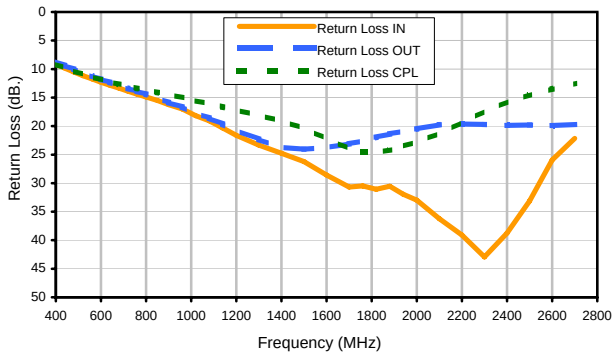

Case Style FM

FM587

Outline Dimensions

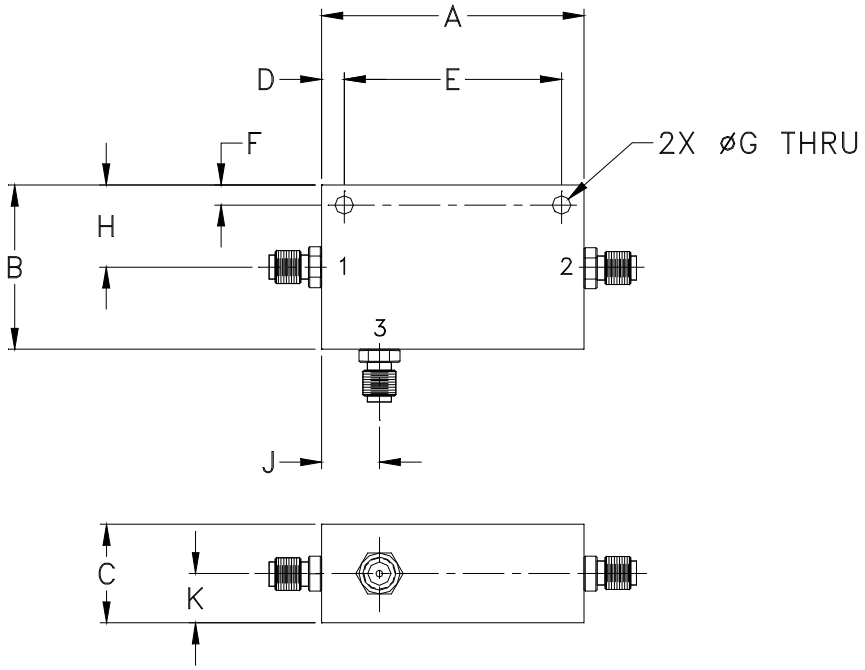

CASE #.	A	B	C	D	E	F	G	H	J	K	WT, GRAM
FM587	2.00 (50.80)	1.24 (31.50)	.75 (19.05)	.17 (4.32)	1.656 (42.06)	.15 (3.81)	.140 (3.56)	.62 (15.75)	.44 (11.18)	.38 (9.65)	57

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
   For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.

This document and its contents are the property of Mini-Circuits.

Mini-Circuits

Environmental Specifications **ENV28T8**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.