

Engineering Development Model

Power Splitter/Combiner

ZAPD-ED12549/1

2 Way-0°

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.



CASE STYLE : 99-01-1177

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C				
Parameter		Min.	Typ.	Max. Units
Frequency		800		2200 MHz
Isolation	800 - 2200 MHz		25	dB
Insertion Loss Above 3.0 dB	800 - 2200 MHz		0.50	dB
Phase Unbalance	800 - 2200 MHz		0.450	deg.
Amplitude Unbalance	800 - 2200 MHz		0.031	dB
VSWR	SUM Port		1.40	(:1)
	OUT Ports		1.50	(:1)

MAXIMUM RATINGS	
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
SUM PORT	S
PORT 1	1
PORT 2	2

Functional Diagram



2 Way-0° Power Splitter/Combiner

ZAPD-ED12549/1

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS ¹ (dB)		AMP. UNBAL. (dB)	ISOLATION (dB)	PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR (:1)		
	S-1	S-2					S	1	2
500.0	3.60	3.53	0.07	11.29	0.18	500.0	1.77	1.22	1.22
550.0	3.46	3.48	0.02	11.90	0.12	550.0	1.74	1.19	1.19
600.0	3.51	3.51	0.00	13.08	0.50	600.0	1.71	1.17	1.18
650.0	3.45	3.44	0.01	13.66	0.21	650.0	1.67	1.16	1.17
700.0	3.41	3.42	0.01	15.00	0.12	700.0	1.63	1.16	1.17
750.0	3.42	3.44	0.02	16.25	0.39	750.0	1.58	1.17	1.18
800.0	3.40	3.36	0.04	17.24	0.13	800.0	1.53	1.18	1.19
850.0	3.36	3.38	0.03	19.86	0.13	850.0	1.48	1.18	1.19
900.0	3.44	3.40	0.04	20.20	0.45	900.0	1.43	1.20	1.20
950.0	3.34	3.34	0.00	23.78	0.31	950.0	1.39	1.21	1.21
1000.0	3.45	3.42	0.03	24.44	0.39	1000.0	1.35	1.23	1.23
1050.0	3.37	3.42	0.05	25.89	0.27	1050.0	1.33	1.24	1.24
1100.0	3.47	3.42	0.06	28.70	0.56	1100.0	1.33	1.27	1.26
1150.0	3.44	3.45	0.00	24.57	0.05	1150.0	1.33	1.28	1.28
1200.0	3.44	3.46	0.01	29.72	0.79	1200.0	1.34	1.30	1.29
1250.0	3.46	3.40	0.06	23.65	0.23	1250.0	1.35	1.31	1.30
1300.0	3.38	3.44	0.05	30.18	0.15	1300.0	1.36	1.32	1.31
1350.0	3.46	3.41	0.05	24.54	0.61	1350.0	1.36	1.32	1.30
1400.0	3.35	3.33	0.02	28.36	0.00	1400.0	1.34	1.30	1.29
1450.0	3.43	3.42	0.01	29.24	0.65	1450.0	1.31	1.28	1.26
1500.0	3.35	3.31	0.04	27.20	0.32	1500.0	1.26	1.25	1.23
1550.0	3.39	3.38	0.01	34.24	0.45	1550.0	1.21	1.21	1.19
1600.0	3.37	3.34	0.03	29.02	0.53	1600.0	1.14	1.16	1.15
1650.0	3.38	3.36	0.02	35.23	0.55	1650.0	1.07	1.11	1.10
1700.0	3.38	3.35	0.03	31.51	0.52	1700.0	1.02	1.07	1.07
1750.0	3.39	3.37	0.02	33.32	0.60	1750.0	1.08	1.07	1.08
1800.0	3.42	3.39	0.03	28.73	0.64	1800.0	1.16	1.11	1.12
1850.0	3.43	3.42	0.01	30.75	0.63	1850.0	1.25	1.16	1.17
1900.0	3.46	3.42	0.04	24.50	0.61	1900.0	1.34	1.22	1.22
1950.0	3.47	3.48	0.01	27.67	0.73	1950.0	1.43	1.28	1.28
2000.0	3.50	3.46	0.04	21.85	0.86	2000.0	1.53	1.34	1.32
2050.0	3.54	3.54	0.01	20.67	0.45	2050.0	1.62	1.38	1.37
2100.0	3.58	3.54	0.03	19.70	0.49	2100.0	1.69	1.42	1.40
2150.0	3.66	3.69	0.03	17.92	0.76	2150.0	1.76	1.45	1.42
2200.0	3.75	3.67	0.09	16.88	0.18	2200.0	1.80	1.47	1.43
2250.0	3.80	3.92	0.12	17.10	0.17	2250.0	1.83	1.47	1.43
2300.0	4.04	3.84	0.20	14.85	1.00	2300.0	1.83	1.46	1.42
2350.0	4.08	4.03	0.05	16.38	0.71	2350.0	1.83	1.45	1.40
2400.0	4.17	4.07	0.10	14.95	1.37	2400.0	1.80	1.41	1.38
2450.0	4.31	4.09	0.22	15.03	0.26	2450.0	1.77	1.38	1.35
2500.0	4.06	4.10	0.04	16.41	0.68	2500.0	1.73	1.33	1.31






¹ Total Loss = Insertion Loss + 3dB Splitter Loss

REV. X2
ZAPD-ED12549/1
100707
Page 1 of 1

2 Way-0° Power Splitter/Combiner

ZAPD-ED12549/1

Typical Performance Curves

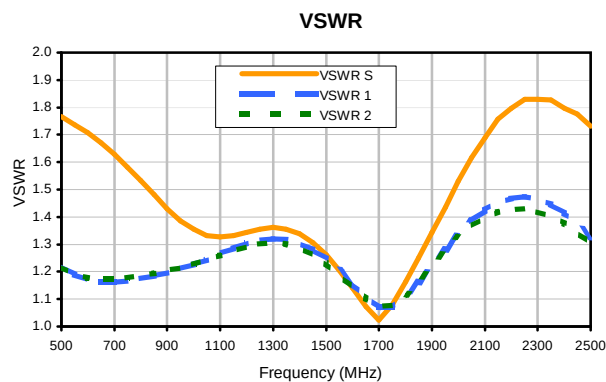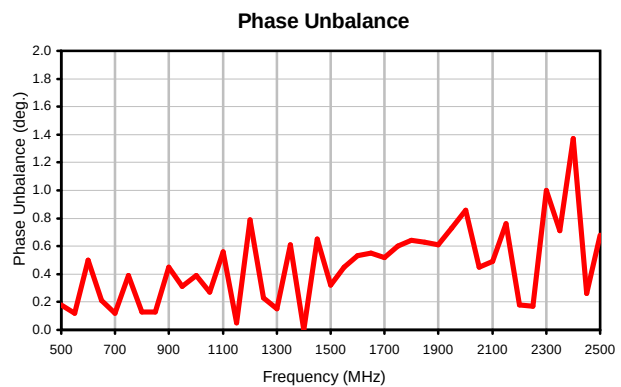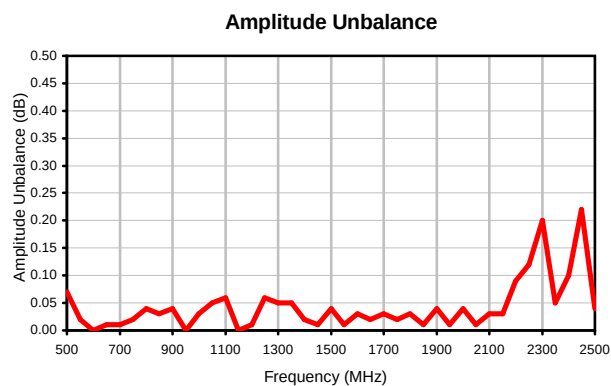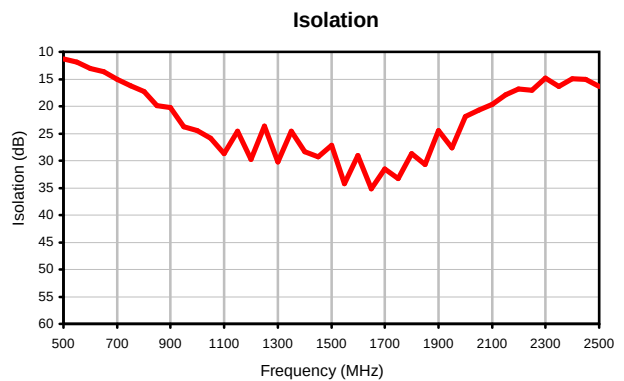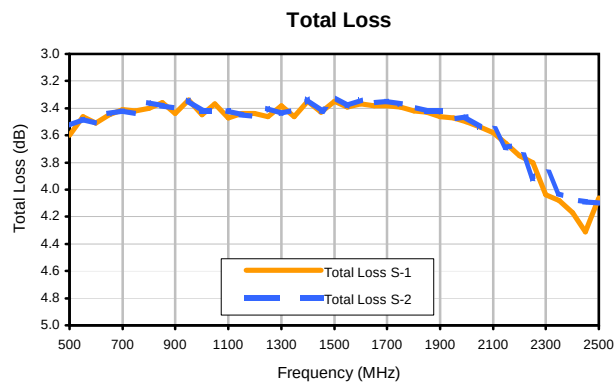



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I