

DC Pass, High Power

Power Splitter/Combiner ZC16PD-18263-S+

16 Way-0° 50Ω 18000 to 26500 MHz

The Big Deal

- Wideband, 18 to 26.5 GHz
- High Isolation, 23 dB typ.
- 20W power handling
- Low amplitude unbalance, 0.24 dB typ.



CASE STYLE: UU640-2

Product Overview

Mini-Circuits' ZC16PD-18263-S+ is a wideband 16-way 0° splitter/combiner providing coverage from 18 to 26.5 GHz, supporting a wide range of applications including Ku-Band, K-Band, instrumentation and many more. This model provides 20W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZC16PD-18263-S+ comes housed in a case measuring 8.27 x 1.42 x 0.5" with super SMA connectors.

Key Features

Feature	Advantages
Wideband, 18 to 26.5 GHz	Extremely wide frequency range supports many broadband applications in a single model.
High isolation, 23 dB typ.	Minimizes interference between ports.
High power handling: • 20W as a splitter at 25°C • 2.4W as a combiner	The ZC16PD-18263-S+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.24 dB	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 470mA	Supports applications where DC power is needed through the RF line.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



DC Pass, High Power Power Splitter/Combiner

16 Way-0° 50Ω 18000 to 26500 MHz

ZC16PD-18263-S+

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	20W* max.
Internal Dissipation	2.4W max.
DC Current	470 mA
Permanent damage may occur if any of these limits are exceeded. * Derate linearly to 11W at 100°C	

Coaxial Connections

Sum Port	S
Port 1-16	1-16

Features

- Super wideband, 18000 - 26500 MHz
- Low amplitude unbalance, 0.24 dB typ.
- Excellent VSWR, 1.29:1 typ.
- High isolation, 23 dB typ.

Applications

- Fixed satellite
- Mobile
- Space research




Generic photo used for illustration purposes only
CASE STYLE: UU640-2

Connectors	Model
SMA-Fem	ZC16PD-18263-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Outline Drawing

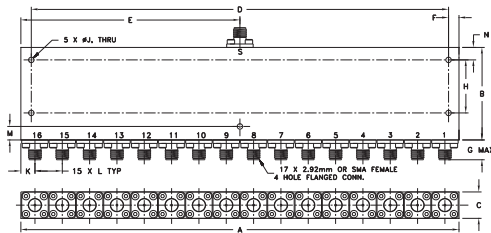

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
8.27	1.42	.50	7.953	4.13	.157	.43
210	36.1	12.70	202.0	105	4.0	11
H	J	K	L	M	wt	
.945	.10	.27	.52	.394	grams	
24.0	2.5	6.86	13.21	10.0	350	

Electrical Schematic



Electrical Specifications at 25°C




Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		18000		26500	MHz
Insertion Loss Above 12.0 dB	18000-26500		3.1	3.8	dB
Isolation	18000-26500	16	23		dB
Phase Unbalance (±)¹	18000-26500		3.8	6	Degree
Amplitude Unbalance (±)¹	18000-26500		0.24	0.5	dB
VSWR (Port S)	18000-26500		1.29	1.6	:1
VSWR (Port 1-16)	18000-26500		1.3	1.6	:1

1. With reference to average

Typical Performance Data

Freq. (MHz)	Total Loss¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1
	S-1		1-2	13-16		
18000	14.34	0.32	24.18	30.56	3.90	1.08
18500	14.48	0.29	24.64	47.19	3.54	1.32
19000	14.41	0.26	34.11	30.56	3.82	1.02
19500	14.49	0.21	31.06	33.68	3.41	1.03
20000	14.55	0.17	27.04	35.22	3.74	1.12
20500	14.57	0.15	31.10	42.35	3.80	1.07
21000	14.63	0.15	34.96	39.84	3.88	1.02
21500	14.69	0.15	32.61	36.85	3.80	1.05
22000	14.74	0.15	36.41	38.69	3.92	1.08
22500	14.79	0.16	25.94	43.29	4.03	1.05
23000	14.84	0.15	25.10	29.51	4.30	1.08
23500	14.91	0.15	24.88	28.75	4.15	1.06
24000	15.03	0.16	22.72	28.11	4.51	1.24
26000	15.16	0.15	27.69	31.86	4.79	1.11
26500	15.29	0.16	26.85	36.16	4.83	1.31

1. Total Loss = Insertion Loss +12dB splitter loss.

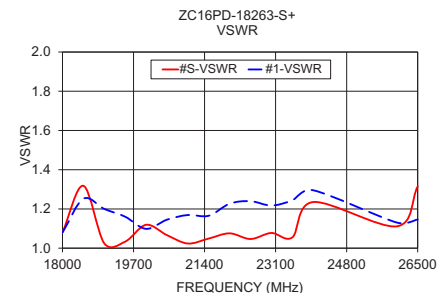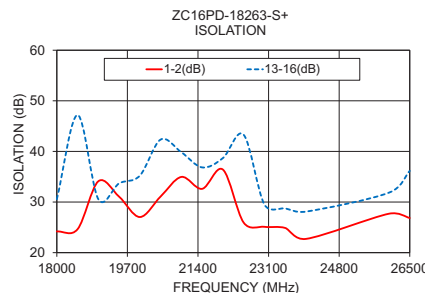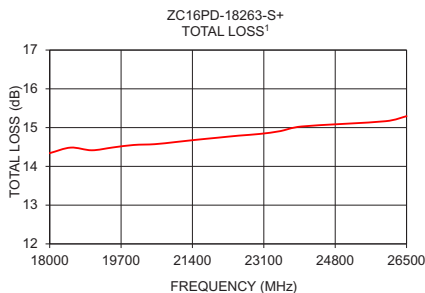

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-005034
ZC16PD-18263-S+
GY/CP/AM
201120
Page 2 of 2

16 Way-0° Power Splitter/Combiner

ZC16PD-18263-S+

Typical Performance Data

Data tested at 25DegC

FREQ.	TOTAL LOSS ¹						AMP. UNBAL.	ISOLATION				PHASE UNBAL.	FREQ.	VSWR		
(MHz)	(dB)						(dB)	(dB)				(deg.)	(MHz)	(:1)		
	S-1	S-5	S-8	S-9	S-13	S-16		1-2	5-7	9-11	13-16			S	1	16
10000	13.51	13.53	13.54	13.60	13.56	13.63	0.13	17.04	29.30	28.76	28.90	2.03	10000	1.28	1.14	1.10
10500	13.58	13.59	13.62	13.69	13.70	13.80	0.22	21.83	33.59	33.10	33.70	2.47	10500	1.34	1.10	1.16
11000	13.61	13.67	13.70	13.70	13.69	13.73	0.13	32.96	26.47	25.16	25.65	2.78	11000	1.28	1.15	1.20
11500	13.70	13.71	13.73	13.73	13.79	13.81	0.12	30.83	31.22	29.53	30.51	2.43	11500	1.30	1.22	1.26
12000	13.91	13.96	13.98	13.96	14.00	14.03	0.12	28.39	33.44	32.41	33.36	2.78	12000	1.54	1.20	1.22
12500	13.75	13.78	13.81	13.81	13.83	13.88	0.13	32.78	58.81	58.18	42.95	2.89	12500	1.22	1.05	1.06
13000	13.85	13.89	13.91	13.92	13.94	13.99	0.14	30.23	35.35	37.51	33.80	3.27	13000	1.31	1.08	1.05
13500	13.89	13.91	13.92	13.94	13.97	14.02	0.14	30.19	38.01	40.33	34.79	3.42	13500	1.24	1.18	1.18
14000	13.95	13.98	13.99	14.01	14.03	14.08	0.15	33.14	36.46	41.71	35.54	3.40	14000	1.29	1.31	1.31
14500	13.99	14.02	14.04	14.02	14.10	14.08	0.19	21.45	40.45	36.94	37.03	3.39	14500	1.24	1.21	1.19
15000	14.06	14.07	14.07	14.11	14.14	14.14	0.13	22.07	27.98	27.17	26.65	3.51	15000	1.27	1.18	1.20
15500	14.10	14.11	14.10	14.18	14.19	14.27	0.17	21.63	29.29	28.46	27.62	3.20	15500	1.25	1.16	1.20
16000	14.20	14.27	14.27	14.35	14.34	14.38	0.18	21.67	30.89	30.35	29.06	4.22	16000	1.38	1.23	1.26
16500	14.16	14.22	14.22	14.25	14.25	14.30	0.19	46.05	31.44	30.64	30.07	3.96	16500	1.11	1.21	1.23
17000	14.26	14.26	14.29	14.32	14.33	14.42	0.23	27.02	29.07	28.11	27.94	4.27	17000	1.27	1.19	1.20
17500	14.34	14.42	14.44	14.42	14.40	14.42	0.27	28.27	25.54	25.37	25.04	4.13	17500	1.34	1.22	1.21
18000	14.34	14.36	14.38	14.36	14.41	14.43	0.32	24.18	31.64	30.78	30.56	3.90	18000	1.08	1.08	1.05
18500	14.48	14.52	14.51	14.54	14.53	14.62	0.29	24.64	41.27	47.11	47.19	3.54	18500	1.32	1.25	1.22
19000	14.41	14.45	14.45	14.51	14.52	14.56	0.26	34.11	33.33	30.31	30.56	3.82	19000	1.02	1.20	1.14
19500	14.49	14.50	14.51	14.54	14.57	14.59	0.21	31.06	37.30	32.98	33.68	3.41	19500	1.03	1.16	1.06
20000	14.55	14.57	14.58	14.61	14.65	14.69	0.17	27.04	37.10	33.82	35.22	3.74	20000	1.12	1.10	1.04
20500	14.57	14.59	14.60	14.65	14.67	14.72	0.15	31.10	42.87	49.57	42.35	3.80	20500	1.07	1.15	1.14
21000	14.63	14.65	14.66	14.71	14.73	14.76	0.15	34.96	38.17	42.74	39.84	3.88	21000	1.02	1.17	1.13
21500	14.69	14.70	14.71	14.76	14.78	14.81	0.15	32.61	36.98	39.41	36.85	3.80	21500	1.05	1.17	1.11
22000	14.74	14.76	14.77	14.80	14.85	14.86	0.15	36.41	40.31	42.89	38.69	3.92	22000	1.08	1.23	1.14
22500	14.79	14.84	14.87	14.85	14.92	14.91	0.16	25.94	43.72	41.96	43.29	4.03	22500	1.05	1.24	1.15
23000	14.84	14.86	14.90	14.93	14.97	14.95	0.15	25.10	29.83	29.71	29.51	4.30	23000	1.08	1.22	1.16
23500	14.91	14.92	14.95	14.97	15.02	15.06	0.15	24.88	29.32	29.58	28.75	4.15	23500	1.06	1.24	1.22
24000	15.03	15.06	15.09	15.15	15.13	15.19	0.16	22.72	28.65	29.61	28.11	4.51	24000	1.24	1.30	1.31
24500	15.10	15.13	15.20	15.22	15.24	15.30	0.20	31.23	36.79	36.25	35.11	4.48	24500	1.23	1.35	1.38
25000	15.16	15.16	15.20	15.25	15.26	15.32	0.16	38.52	35.29	32.96	34.07	4.94	25000	1.35	1.18	1.21
25500	15.16	15.23	15.24	15.30	15.31	15.30	0.19	37.47	28.52	27.36	27.66	5.07	25500	1.34	1.11	1.12
26000	15.16	15.17	15.20	15.25	15.28	15.27	0.15	27.69	33.11	31.91	31.86	4.79	26000	1.11	1.13	1.13
26500	15.29	15.31	15.34	15.38	15.41	15.46	0.16	26.85	38.08	37.41	36.16	4.83	26500	1.31	1.15	1.16
27000	15.21	15.25	15.26	15.33	15.36	15.40	0.20	36.16	33.25	31.31	31.49	5.17	27000	1.06	1.04	1.06
27500	15.27	15.31	15.31	15.38	15.40	15.41	0.18	36.92	34.23	32.60	32.70	5.34	27500	1.03	1.05	1.04
28000	15.36	15.37	15.38	15.43	15.49	15.51	0.18	30.11	33.53	32.35	32.23	5.22	28000	1.11	1.08	1.02
28500	15.38	15.42	15.43	15.50	15.53	15.55	0.18	29.66	45.20	43.48	42.64	5.39	28500	1.13	1.05	1.09
29000	15.41	15.44	15.45	15.56	15.58	15.59	0.21	33.45	43.85	48.65	49.72	5.65	29000	1.10	1.11	1.13
30000	15.54	15.56	15.57	15.65	15.68	15.70	0.18	31.71	38.21	42.12	39.40	5.76	30000	1.13	1.08	1.07

¹Total Loss = Insertion Loss + 12dB Splitter Loss



ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR
 ZC16PD-18263-S+
 6/12/2019
 Page 1 of 3

16 Way-0° Power Splitter/Combiner

ZC16PD-18263-S+

Typical Performance Data

Data tested at -55DegC

FREQ. (MHz)	TOTAL LOSS ¹						AMP. UNBAL. (dB)	ISOLATION				PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR		
	S-1	S-5	S-8	S-9	S-13	S-16		1-2	5-7	9-11	13-16			S	1	16
10000	13.44	13.48	13.50	13.53	13.51	13.61	0.17	17.05	29.40	28.82	29.05	2.33	10000	1.27	1.14	1.11
10500	13.50	13.54	13.57	13.62	13.66	13.78	0.28	22.36	32.53	31.88	32.76	2.16	10500	1.33	1.11	1.17
11000	13.54	13.62	13.64	13.63	13.65	13.70	0.16	32.01	26.19	24.87	25.44	2.19	11000	1.29	1.16	1.20
11500	13.61	13.64	13.67	13.65	13.74	13.79	0.18	31.96	31.04	29.45	30.57	2.44	11500	1.29	1.24	1.26
12000	13.85	13.89	13.92	13.91	13.97	14.02	0.17	29.83	33.92	32.95	33.81	2.38	12000	1.56	1.20	1.22
12500	13.68	13.73	13.77	13.75	13.79	13.86	0.19	33.15	56.68	57.38	45.80	2.59	12500	1.26	1.07	1.06
13000	13.77	13.83	13.85	13.86	13.90	13.98	0.20	29.51	36.05	38.59	34.30	2.67	13000	1.34	1.06	1.04
13500	13.79	13.84	13.87	13.88	13.93	14.00	0.21	30.73	38.14	41.40	35.10	2.77	13500	1.26	1.16	1.18
14000	13.85	13.91	13.93	13.93	13.99	14.05	0.20	31.76	37.61	44.45	36.51	2.79	14000	1.30	1.30	1.31
14500	13.88	13.94	13.97	13.92	14.05	14.05	0.23	21.14	38.24	35.25	35.87	2.71	14500	1.25	1.19	1.18
15000	13.95	13.98	14.01	14.04	14.09	14.12	0.19	22.25	27.99	27.24	26.69	3.16	15000	1.25	1.17	1.21
15500	13.97	14.03	14.04	14.08	14.13	14.23	0.26	21.84	28.97	28.19	27.37	3.00	15500	1.23	1.16	1.21
16000	14.11	14.22	14.23	14.28	14.33	14.37	0.27	22.25	32.92	32.43	30.67	3.01	16000	1.40	1.26	1.28
16500	14.04	14.12	14.14	14.14	14.18	14.25	0.21	43.84	30.74	29.94	29.49	3.49	16500	1.08	1.23	1.22
17000	14.12	14.16	14.19	14.21	14.27	14.37	0.25	26.62	27.76	27.02	27.06	3.41	17000	1.21	1.18	1.19
17500	14.22	14.34	14.37	14.34	14.37	14.38	0.26	26.23	26.08	25.94	25.55	3.99	17500	1.33	1.21	1.22
18000	14.22	14.28	14.29	14.27	14.35	14.39	0.30	23.96	31.36	30.78	30.61	3.86	18000	1.10	1.09	1.08
18500	14.37	14.43	14.43	14.48	14.50	14.60	0.30	24.89	46.84	44.19	46.29	4.07	18500	1.33	1.29	1.26
19000	14.27	14.34	14.37	14.42	14.46	14.50	0.29	34.75	33.06	30.03	30.44	4.01	19000	1.03	1.19	1.15
19500	14.35	14.40	14.41	14.45	14.52	14.55	0.25	31.24	36.63	32.58	33.42	4.23	19500	1.01	1.14	1.05
20000	14.42	14.48	14.50	14.54	14.60	14.66	0.24	27.13	37.87	34.63	36.42	4.31	20000	1.16	1.08	1.07
20500	14.44	14.50	14.51	14.56	14.60	14.66	0.22	32.40	42.77	46.50	40.91	4.41	20500	1.03	1.15	1.15
21000	14.50	14.55	14.57	14.61	14.65	14.70	0.20	35.56	37.60	42.47	39.77	4.47	21000	1.05	1.15	1.14
21500	14.56	14.61	14.63	14.67	14.71	14.75	0.20	34.24	39.17	41.39	38.10	4.64	21500	1.08	1.15	1.12
22000	14.63	14.67	14.68	14.71	14.78	14.80	0.20	35.20	40.59	44.25	39.23	4.69	22000	1.12	1.19	1.13
22500	14.67	14.73	14.76	14.73	14.84	14.83	0.20	25.14	40.14	38.40	39.97	4.72	22500	1.07	1.19	1.12
23000	14.74	14.76	14.80	14.82	14.89	14.90	0.17	25.47	29.62	29.66	29.35	4.76	23000	1.12	1.20	1.15
23500	14.80	14.81	14.85	14.84	14.92	14.99	0.20	24.83	29.06	29.48	28.60	4.57	23500	1.06	1.22	1.20
24000	15.00	14.99	15.04	15.07	15.11	15.17	0.18	22.68	29.77	31.03	29.07	4.82	24000	1.34	1.31	1.33
24500	14.95	14.96	15.04	15.02	15.08	15.16	0.23	33.48	35.35	34.70	34.32	5.22	24500	1.07	1.33	1.37
25000	15.01	14.99	15.05	15.10	15.13	15.20	0.21	34.78	33.95	31.52	33.07	5.49	25000	1.27	1.17	1.19
25500	15.06	15.08	15.11	15.15	15.20	15.20	0.20	34.96	28.78	27.73	27.89	5.49	25500	1.33	1.10	1.11
26000	15.07	15.05	15.09	15.11	15.18	15.19	0.20	27.58	32.86	31.72	31.63	5.55	26000	1.12	1.13	1.14
26500	15.17	15.17	15.21	15.26	15.31	15.38	0.22	27.07	42.06	40.72	39.19	5.55	26500	1.35	1.16	1.16
27000	15.09	15.12	15.12	15.20	15.26	15.30	0.22	36.42	32.86	30.92	31.12	5.59	27000	1.14	1.07	1.07
27500	15.14	15.16	15.17	15.24	15.31	15.32	0.22	36.69	33.66	32.10	32.35	5.80	27500	1.09	1.06	1.04
28000	15.18	15.19	15.21	15.26	15.37	15.40	0.24	29.26	34.34	33.13	32.93	5.92	28000	1.14	1.04	1.02
28500	15.22	15.23	15.25	15.32	15.41	15.44	0.23	30.76	46.60	43.38	43.43	6.17	28500	1.06	1.07	1.11
29000	15.25	15.27	15.28	15.38	15.45	15.48	0.24	34.52	41.90	48.36	50.32	5.88	29000	1.06	1.09	1.14
30000	15.39	15.38	15.40	15.47	15.56	15.58	0.23	32.07	37.33	41.34	38.54	6.07	30000	1.17	1.04	1.08

¹Total Loss = Insertion Loss + 12dB Splitter Loss



ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR

ZC16PD-18263-S+

6/12/2019

Page 2 of 3

16 Way-0° Power Splitter/Combiner

ZC16PD-18263-S+

Typical Performance Data

Data tested at 100DegC

FREQ. (MHz)	TOTAL LOSS ¹						AMP. UNBAL. (dB)	ISOLATION				PHASE UNBAL. (deg.)	FREQ. (MHz)	VSWR		
	S-1	S-5	S-8	S-9	S-13	S-16		1-2	5-7	9-11	13-16			S	1	16
10000	13.60	13.58	13.58	13.64	13.59	13.66	0.09	16.81	29.14	28.63	28.81	2.44	10000	1.28	1.09	1.08
10500	13.68	13.65	13.66	13.74	13.72	13.83	0.18	21.35	33.66	33.02	33.83	2.46	10500	1.31	1.13	1.18
11000	13.74	13.74	13.72	13.74	13.71	13.77	0.11	32.09	26.33	25.05	25.57	2.34	11000	1.27	1.22	1.21
11500	13.84	13.79	13.79	13.78	13.82	13.85	0.12	30.96	30.77	29.10	30.04	2.47	11500	1.31	1.27	1.26
12000	14.03	14.01	14.01	14.00	14.02	14.05	0.12	29.59	33.30	32.26	33.14	2.62	12000	1.51	1.19	1.22
12500	13.88	13.85	13.85	13.86	13.86	13.91	0.13	32.77	54.99	56.94	43.50	2.71	12500	1.18	1.08	1.05
13000	13.99	13.96	13.96	13.98	13.97	14.03	0.14	29.92	35.95	38.64	34.52	2.80	13000	1.29	1.14	1.05
13500	14.05	13.99	13.98	14.01	14.01	14.07	0.18	29.44	37.66	40.41	34.69	2.67	13500	1.23	1.24	1.19
14000	14.12	14.05	14.04	14.08	14.07	14.13	0.19	33.56	36.40	42.00	35.52	2.90	14000	1.29	1.40	1.33
14500	14.14	14.09	14.09	14.08	14.14	14.15	0.20	21.52	40.76	36.79	37.18	2.88	14500	1.21	1.28	1.21
15000	14.24	14.16	14.13	14.19	14.18	14.19	0.22	21.83	28.01	27.17	26.68	2.87	15000	1.27	1.23	1.21
15500	14.27	14.21	14.17	14.27	14.23	14.30	0.21	21.46	29.12	28.32	27.46	3.76	15500	1.25	1.21	1.21
16000	14.36	14.36	14.32	14.41	14.38	14.43	0.17	21.40	30.45	30.07	28.82	3.25	16000	1.36	1.24	1.26
16500	14.33	14.33	14.30	14.32	14.31	14.34	0.21	46.56	31.68	30.74	30.27	3.42	16500	1.13	1.15	1.24
17000	14.45	14.37	14.37	14.40	14.39	14.48	0.21	27.30	29.41	28.28	28.11	3.37	17000	1.27	1.18	1.20
17500	14.54	14.52	14.50	14.50	14.43	14.47	0.25	29.34	25.25	25.10	24.78	3.62	17500	1.30	1.22	1.21
18000	14.54	14.48	14.46	14.46	14.48	14.50	0.25	24.08	31.69	30.75	30.56	3.57	18000	1.06	1.10	1.05
18500	14.65	14.60	14.57	14.63	14.59	14.66	0.17	24.14	40.15	46.34	46.67	3.81	18500	1.28	1.18	1.20
19000	14.67	14.59	14.54	14.63	14.59	14.64	0.19	33.23	33.59	30.39	30.71	4.30	19000	1.07	1.21	1.14
19500	14.74	14.64	14.61	14.66	14.65	14.67	0.20	31.21	36.77	32.58	33.35	4.03	19500	1.07	1.18	1.07
20000	14.80	14.71	14.69	14.73	14.72	14.76	0.17	27.67	37.37	33.93	35.46	4.21	20000	1.13	1.14	1.03
20500	14.83	14.73	14.70	14.77	14.75	14.79	0.15	31.54	43.27	52.86	44.15	4.22	20500	1.08	1.15	1.13
21000	14.91	14.79	14.76	14.83	14.80	14.84	0.17	34.46	39.91	46.31	42.15	4.37	21000	1.02	1.21	1.13
21500	14.97	14.85	14.82	14.88	14.87	14.88	0.19	32.01	37.22	40.09	37.38	4.43	21500	1.05	1.25	1.12
22000	15.04	14.91	14.88	14.93	14.93	14.94	0.22	36.57	39.89	42.77	38.63	4.61	22000	1.07	1.34	1.16
22500	15.08	14.99	14.98	14.98	15.01	15.00	0.20	26.37	43.51	41.68	43.13	4.68	22500	1.04	1.34	1.17
23000	15.13	15.03	15.01	15.07	15.05	15.03	0.16	24.74	30.24	30.05	29.84	4.87	23000	1.06	1.29	1.17
23500	15.21	15.09	15.07	15.13	15.11	15.13	0.14	24.72	29.43	29.64	28.76	5.42	23500	1.06	1.30	1.22
24000	15.31	15.21	15.18	15.26	15.20	15.26	0.14	22.74	28.25	29.24	27.83	5.03	24000	1.16	1.33	1.30
24500	15.42	15.34	15.34	15.37	15.35	15.41	0.15	30.36	37.54	36.69	35.66	5.21	24500	1.30	1.33	1.37
25000	15.46	15.34	15.33	15.39	15.36	15.41	0.14	40.29	36.05	33.52	34.58	5.01	25000	1.34	1.13	1.19
25500	15.48	15.36	15.33	15.42	15.39	15.39	0.16	38.35	28.36	27.16	27.46	5.29	25500	1.31	1.12	1.10
26000	15.50	15.36	15.33	15.39	15.38	15.36	0.23	28.13	32.70	31.56	31.54	5.17	26000	1.12	1.18	1.11
26500	15.60	15.47	15.45	15.52	15.50	15.53	0.17	26.83	38.04	37.35	36.29	5.57	26500	1.28	1.11	1.13
27000	15.56	15.42	15.38	15.48	15.45	15.50	0.19	34.44	34.12	31.86	32.00	5.52	27000	1.01	1.09	1.04
27500	15.64	15.51	15.44	15.55	15.51	15.52	0.23	36.39	34.05	32.30	32.35	5.48	27500	1.02	1.13	1.04
28000	15.76	15.58	15.54	15.62	15.61	15.61	0.26	31.00	33.27	32.12	32.09	5.74	28000	1.12	1.18	1.03
28500	15.77	15.61	15.57	15.67	15.64	15.64	0.22	29.99	46.73	44.68	43.93	5.88	28500	1.13	1.16	1.08
29000	15.81	15.64	15.59	15.74	15.69	15.70	0.22	33.07	47.76	52.22	53.28	6.01	29000	1.06	1.19	1.14
30000	15.95	15.76	15.71	15.83	15.80	15.82	0.25	31.25	37.74	41.48	38.74	6.21	30000	1.07	1.20	1.09

¹Total Loss = Insertion Loss + 12dB Splitter Loss

Mini-Circuits®

ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS









REV. OR

ZC16PD-18263-S+

6/12/2019


Page 3 of 3

Typical Performance Curves

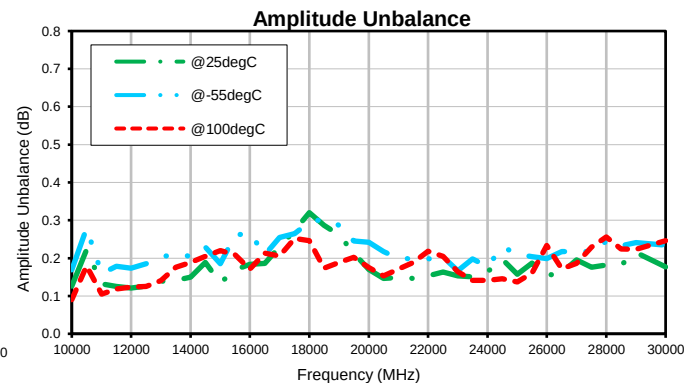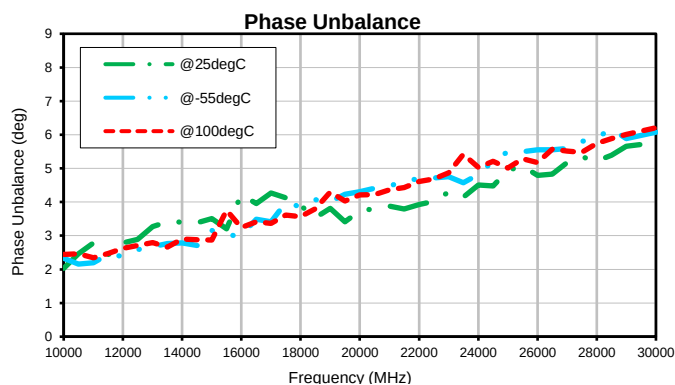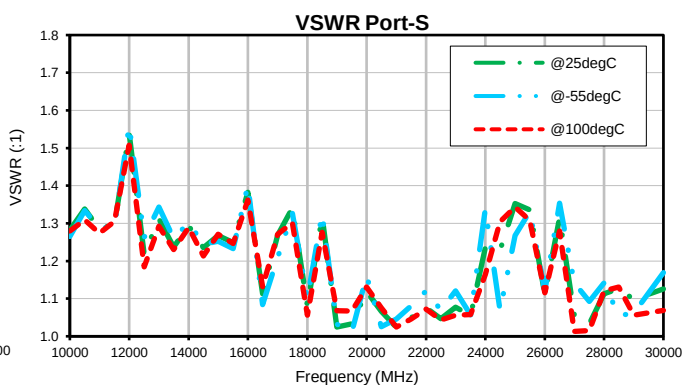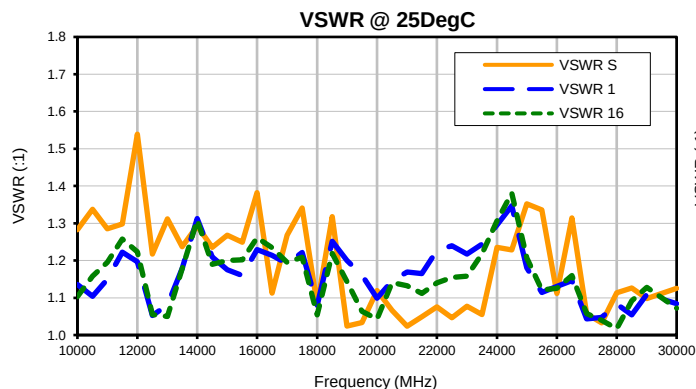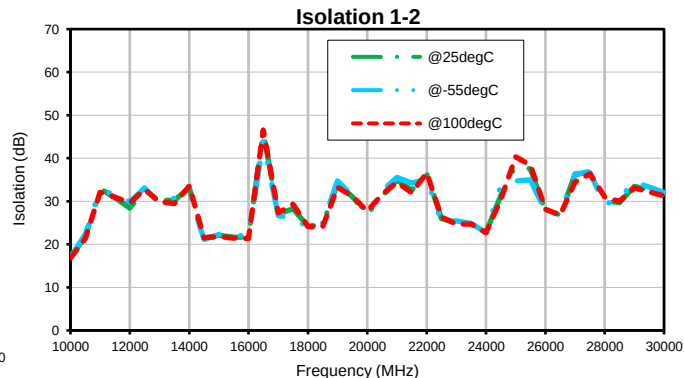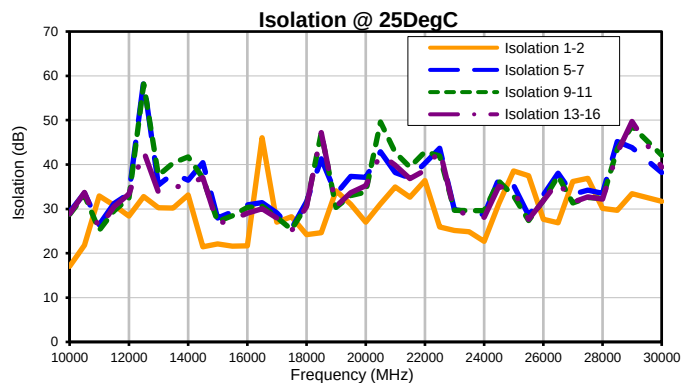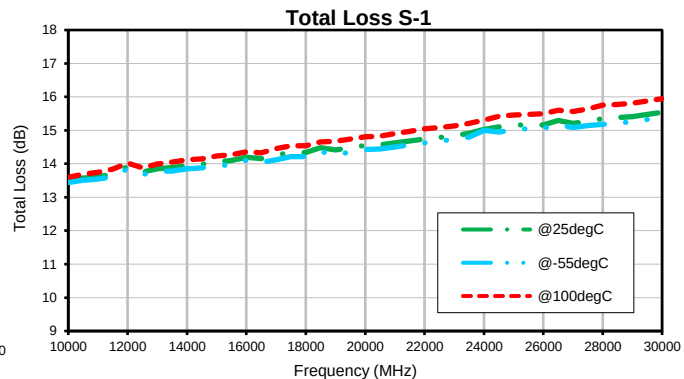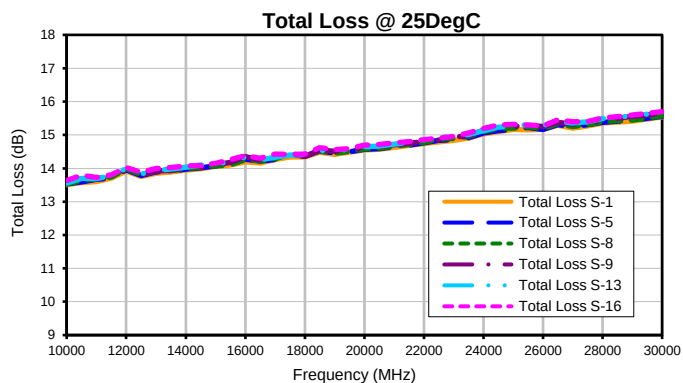

Outline Dimensions

UU640-2

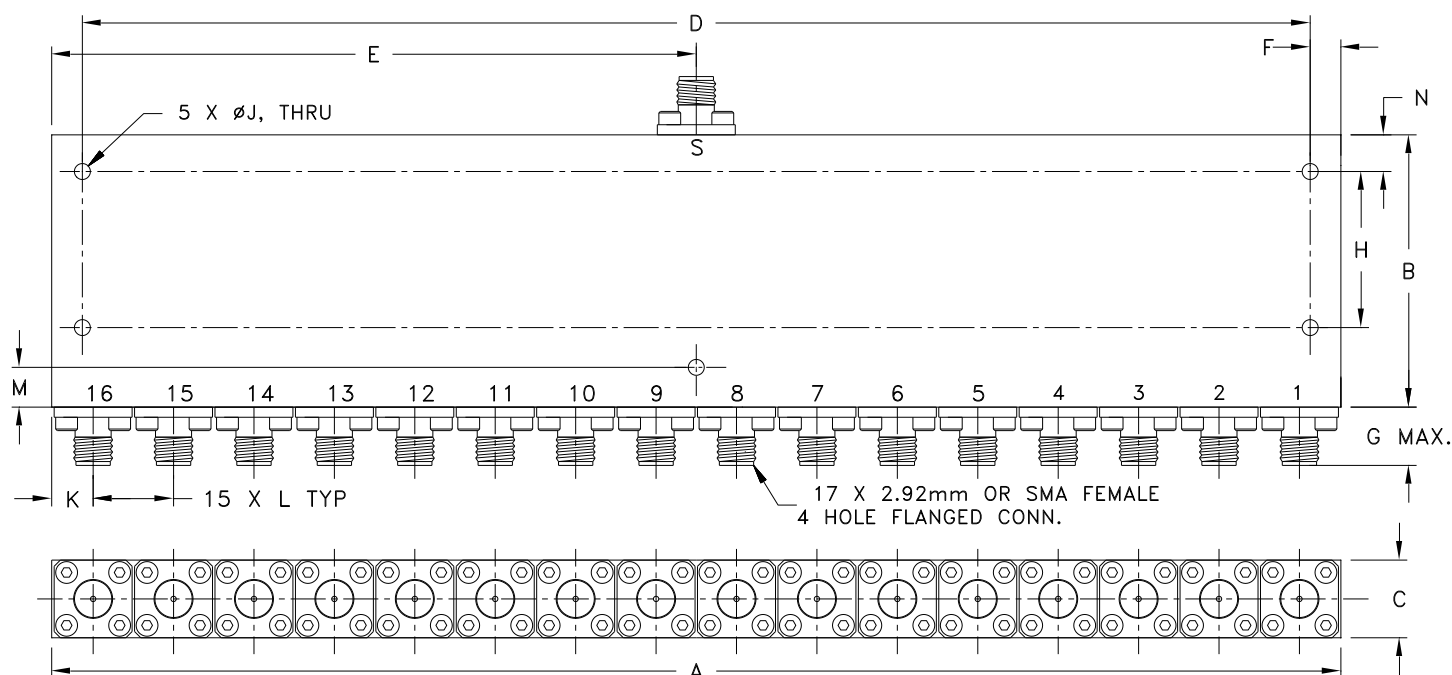

CASE#	A	B	C	D	E	F	G	H	J	K	L	M
UU640-2	8.27 (210.00)	1.42 (36.00)	.50 (12.70)	7.953 (202.00)	4.13 (105.00)	.157 (4.00)	.43 (11.0)	.945 (24.00)	.10 (2.60)	.27 (6.75)	.52 (13.10)	.394 (10.00)

CASE#	N	WT. GRAMS
UU640-2	.236 (6.0)	350

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B