

Coaxial Low Pass Filter

ZFLP-450+

50Ω DC to 450 MHz

The Big Deal

- Wide stopband Rejection
- Good VSWR, 1.2:1 typical in passband
- High Rejection



CASE STYLE: H16

Product Overview

ZFLP-450+ is a 50Ω lowpass filter built into a rugged connectorized package (size :1.25" x 1.25" x 0.75") case. The model has high rejection, wide stopband rejection with well matched input and output ports. This is designed to handle high power (1W)

Key Features

Feature	Advantages
Wide stopband (More than 1 decade of cutoff frequency)	Suitable for application which needs far-frequency attenuation, for e.g. Defense Communications.
Good VSWR, 1.2:1 typical in passband	The model has good matching when used with other devices.
High Rejection	This enables the filter to attenuate harmonics and spurious signals.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

Low Pass Filter

ZFLP-450+

50Ω DC to 450 MHz



CASE STYLE: H16

Features

- High Rejection
- Wide stopband rejection
- Good VSWR, 1.2:1 typical in passband
- Rugged connectorized package

Applications

- Harmonic rejection
- Defense Communications
- Receivers / Transmitters
- Lab Use

Connectors	Model	Price	Qty.
SMA-Female	ZFLP-450-S+	\$49.95 ea.	(1-9)
BRACKET (OPTION "B")		\$5.00 ea.	(1-9)

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	—	0.5	1.0	dB
	Freq. Cut-Off	F2	—	4.0	—	dB
	VSWR	DC-F1	—	1.2	1.5	:1
Stop Band	Rejection Loss	F3-F4	20	26	—	dB
	VSWR	F3-F4	—	21	—	:1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1W max. at 25°C

Permanent damage may occur if any of these limits are exceeded.


Functional Schematic



Typical Performance Data at 25°C





Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.5	0.02	1.00	0.5	1.75
3.5	0.02	1.01	5.0	1.63
20.0	0.05	1.02	165.0	1.72
50.0	0.08	1.03	195.0	1.74
80.0	0.10	1.03	240.0	1.85
205.0	0.22	1.14	280.0	1.94
405.0	0.39	1.11	290.0	1.98
450.0	0.48	1.10	305.0	2.00
480.0	0.88	1.65	325.0	2.09
500.0	2.10	2.91	335.0	2.14
505.0	2.60	3.45	360.0	2.26
530.0	6.44	8.35	375.0	2.35
570.0	14.03	23.18	385.0	2.41
640.0	27.28	40.41	390.0	2.48
730.0	48.04	52.65	400.0	2.53
1000.0	44.04	72.39	405.0	2.55
1500.0	48.71	91.43	415.0	2.65
2000.0	52.62	69.49	425.0	2.80
3000.0	43.66	38.61	440.0	3.03
5000.0	30.58	20.95	450.0	3.23

Typical Frequency Response



+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

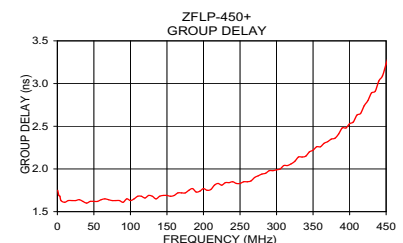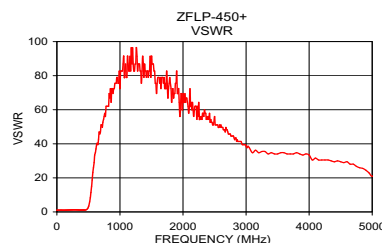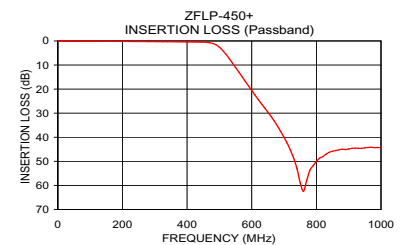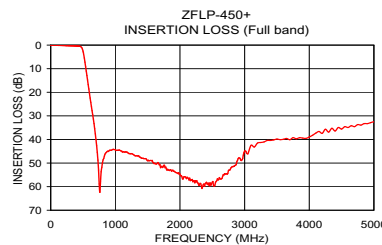

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


For detailed performance specs & shopping online see web site

REV. OR
M130754
ZFLP-450+
EDR-9824BU
RAV/URJ/NY
111123
Page 2 of 3

Coaxial Connections

INPUT	SMA-FEMALE
OUTPUT	SMA-FEMALE

Outline Drawing

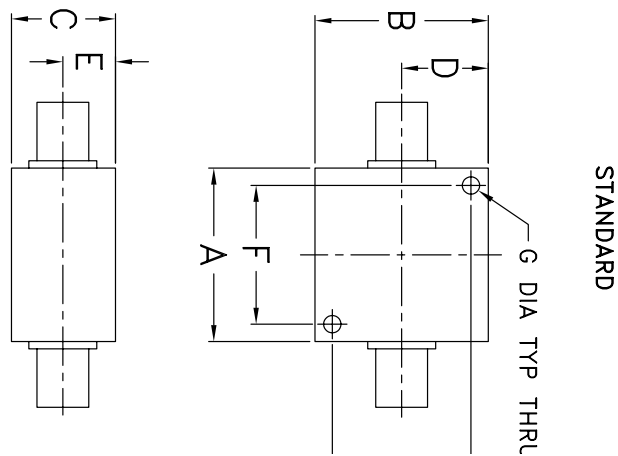

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.000	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40
J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.750	.06	grams
--	--	3.18	42.88	55.37	19.05	1.52	70.0







Typical Performance Data

FREQ.	INSERTION LOSS			INPUT RETURN LOSS			OUTPUT RETURN LOSS		
(MHz)	(dB)			(dB)			(dB)		
	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C
0.50	0.01	0.02	0.02	54.26	51.84	49.56	54.53	51.89	49.73
2.00	0.03	0.03	0.03	52.86	49.87	48.10	52.69	49.87	48.04
10.00	0.03	0.04	0.05	45.28	42.43	40.78	44.84	42.26	40.74
50.00	0.06	0.09	0.09	32.64	32.50	32.36	32.00	31.95	31.91
100.00	0.10	0.12	0.14	29.42	30.24	31.02	28.68	29.14	29.56
150.00	0.12	0.16	0.18	29.64	30.53	31.04	28.77	29.39	29.78
200.00	0.14	0.19	0.23	27.34	27.17	27.01	27.68	27.65	27.67
250.00	0.19	0.24	0.28	23.35	23.43	23.55	24.19	24.49	24.76
300.00	0.21	0.28	0.32	22.54	22.60	22.74	23.47	23.73	23.98
350.00	0.23	0.31	0.37	23.83	23.80	23.70	24.26	24.33	24.22
400.00	0.31	0.40	0.45	24.17	24.12	24.15	23.73	23.74	23.75
410.00	0.31	0.40	0.46	25.17	25.28	25.43	24.70	24.82	24.97
420.00	0.32	0.42	0.48	27.87	28.24	28.73	27.16	27.56	27.99
430.00	0.34	0.44	0.50	36.32	38.04	40.57	34.44	36.04	37.59
440.00	0.36	0.46	0.54	32.10	30.45	29.02	33.51	31.46	29.87
450.00	0.41	0.53	0.61	21.94	21.16	20.43	22.23	21.43	20.67
460.00	0.54	0.68	0.78	16.12	15.59	15.09	16.20	15.69	15.18
470.00	0.79	0.95	1.08	11.88	11.49	11.13	11.89	11.54	11.18
480.00	1.23	1.44	1.60	8.59	8.33	8.08	8.59	8.36	8.11
490.00	1.97	2.22	2.43	6.08	5.91	5.75	6.04	5.91	5.75
500.00	2.99	3.27	3.51	4.21	4.13	4.03	4.16	4.12	4.03
510.00	4.33	4.64	4.92	2.89	2.87	2.83	2.83	2.85	2.82
520.00	6.04	6.36	6.65	2.01	2.02	2.02	1.95	2.01	2.02
530.00	7.92	8.25	8.54	1.44	1.48	1.51	1.37	1.46	1.49
540.00	9.76	10.08	10.37	1.07	1.13	1.16	1.00	1.10	1.15
550.00	11.58	11.89	12.18	0.83	0.90	0.94	0.76	0.88	0.93
560.00	13.49	13.78	14.07	0.68	0.74	0.79	0.61	0.72	0.78
570.00	15.45	15.73	16.00	0.57	0.64	0.69	0.50	0.62	0.67
580.00	17.36	17.66	17.92	0.50	0.57	0.61	0.43	0.55	0.60
590.00	19.17	19.47	19.71	0.45	0.52	0.56	0.37	0.50	0.55
600.00	20.93	21.21	21.42	0.41	0.48	0.52	0.34	0.46	0.52
610.00	22.75	23.01	23.22	0.38	0.44	0.49	0.32	0.43	0.50
620.00	24.63	24.88	25.13	0.36	0.42	0.47	0.29	0.40	0.47
630.00	26.44	26.70	26.94	0.34	0.40	0.46	0.28	0.39	0.45
640.00	28.17	28.45	28.68	0.33	0.39	0.44	0.26	0.37	0.43
650.00	30.09	30.35	30.60	0.31	0.37	0.42	0.24	0.36	0.42
660.00	32.13	32.41	32.64	0.29	0.36	0.40	0.24	0.35	0.41
670.00	34.10	34.38	34.66	0.29	0.35	0.40	0.22	0.34	0.40
680.00	35.92	36.22	36.50	0.28	0.35	0.39	0.22	0.33	0.40
690.00	38.04	38.33	38.62	0.27	0.33	0.38	0.21	0.33	0.39
700.00	40.63	40.89	41.27	0.26	0.32	0.37	0.20	0.32	0.38
750.00	64.79	65.19	65.25	0.23	0.29	0.34	0.16	0.28	0.36
800.00	48.51	48.57	48.53	0.20	0.27	0.31	0.14	0.26	0.33
900.00	44.40	44.41	44.47	0.16	0.23	0.28	0.10	0.23	0.31
1000.00	44.06	44.23	44.26	0.14	0.22	0.27	0.07	0.21	0.30
1100.00	44.58	44.69	44.80	0.12	0.21	0.27	0.06	0.21	0.30
1200.00	45.25	45.56	45.57	0.11	0.20	0.26	0.04	0.21	0.30
1300.00	46.07	46.36	46.53	0.09	0.20	0.26	0.02	0.21	0.31
1400.00	47.29	47.66	47.92	0.09	0.19	0.27	0.02	0.22	0.31
1500.00	48.33	48.82	48.72	0.10	0.21	0.29	0.02	0.22	0.33
2000.00	54.94	55.08	56.02	0.13	0.26	0.36	0.02	0.26	0.40
2500.00	59.62	59.22	59.85	0.15	0.31	0.41	0.01	0.30	0.46
3000.00	48.77	47.54	46.70	0.23	0.41	0.53	0.08	0.39	0.57
3500.00	39.85	39.71	39.61	0.30	0.48	0.61	0.12	0.46	0.67
4000.00	38.87	37.33	37.15	0.32	0.51	0.65	0.16	0.51	0.70
4500.00	36.58	35.82	35.69	0.31	0.52	0.67	0.11	0.51	0.76
5000.00	34.18	34.17	34.08	0.39	0.58	0.75	0.14	0.57	0.88


Typical Performance Data

FREQ.	GROUP DELAY		
(MHz)	(nsec)		
	@-40°C	@+25°C	@+85°C
0.5	1.57	1.68	1.67
2.0	1.58	1.69	1.66
5.0	1.64	1.68	1.67
10.0	1.66	1.67	1.67
20.0	1.65	1.65	1.66
30.0	1.65	1.65	1.65
40.0	1.65	1.65	1.65
50.0	1.65	1.64	1.64
60.0	1.65	1.65	1.65
70.0	1.65	1.64	1.65
80.0	1.66	1.65	1.65
90.0	1.67	1.66	1.66
100.0	1.67	1.66	1.66
110.0	1.68	1.68	1.67
120.0	1.70	1.69	1.68
130.0	1.71	1.70	1.70
140.0	1.71	1.70	1.70
150.0	1.73	1.72	1.71
160.0	1.74	1.73	1.73
170.0	1.74	1.74	1.73
180.0	1.76	1.75	1.75
190.0	1.78	1.77	1.78
200.0	1.81	1.80	1.79
210.0	1.81	1.81	1.80
220.0	1.83	1.82	1.82
230.0	1.87	1.86	1.85
240.0	1.88	1.88	1.87
250.0	1.90	1.89	1.89
260.0	1.92	1.91	1.91
270.0	1.95	1.95	1.94
280.0	1.99	1.99	1.99
290.0	2.02	2.01	2.00
300.0	2.04	2.04	2.04
305.0	2.06	2.06	2.06
310.0	2.08	2.07	2.07
320.0	2.12	2.12	2.12
330.0	2.17	2.17	2.16
340.0	2.22	2.22	2.22
350.0	2.27	2.26	2.26
360.0	2.33	2.33	2.33
370.0	2.39	2.38	2.38
375.0	2.43	2.42	2.43
380.0	2.45	2.45	2.45
385.0	2.49	2.48	2.49
390.0	2.51	2.52	2.52
395.0	2.55	2.56	2.56
400.0	2.60	2.61	2.60
405.0	2.65	2.66	2.67
410.0	2.72	2.72	2.73
415.0	2.79	2.79	2.80
420.0	2.86	2.86	2.87
425.0	2.93	2.94	2.95
430.0	3.01	3.02	3.03
435.0	3.10	3.12	3.14
440.0	3.21	3.23	3.25
445.0	3.33	3.35	3.38
450.0	3.46	3.49	3.51

Typical Performance Curves

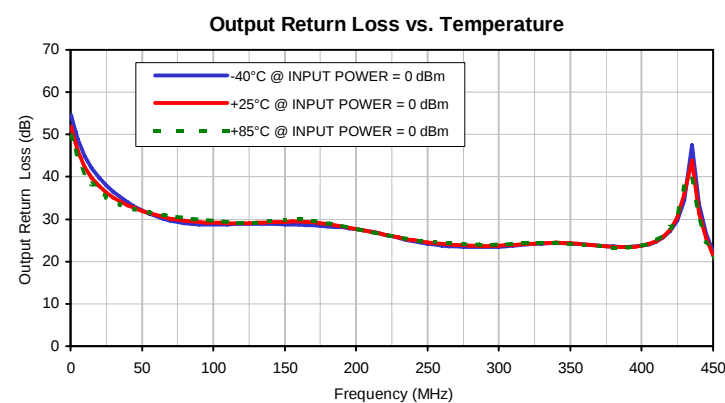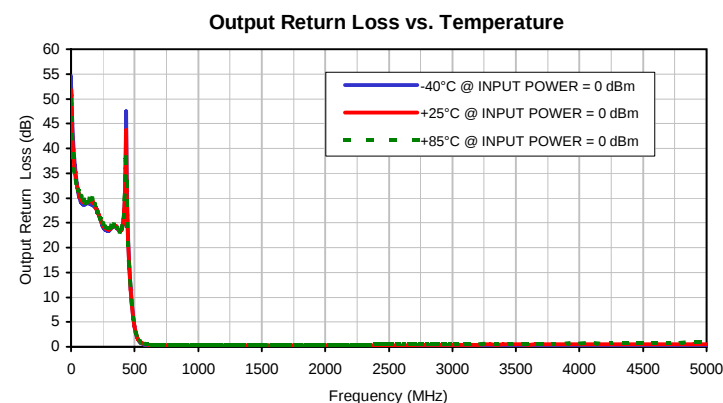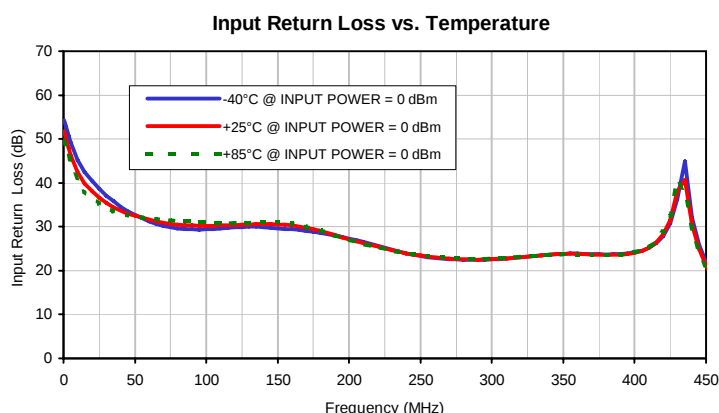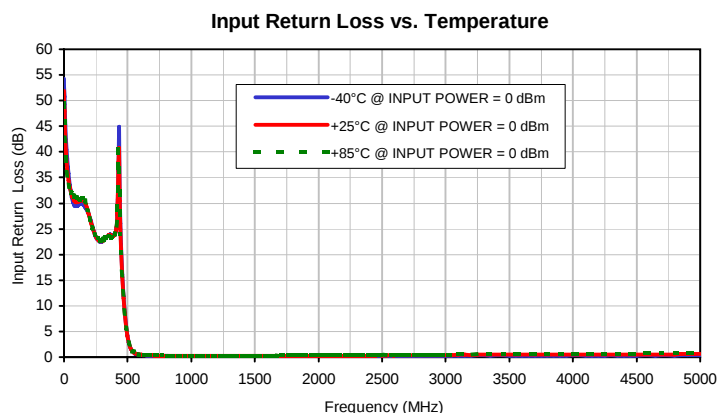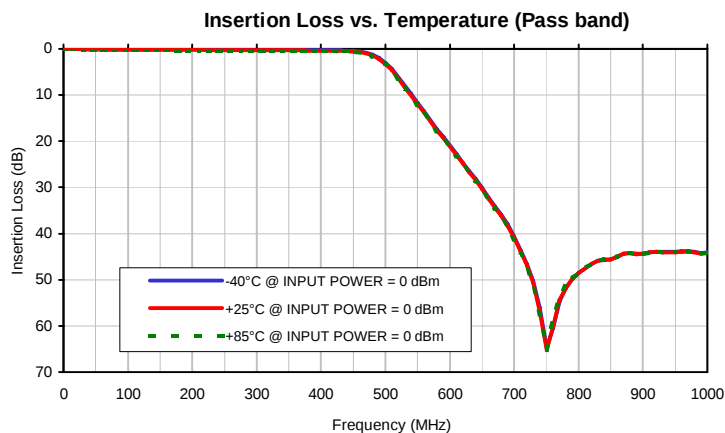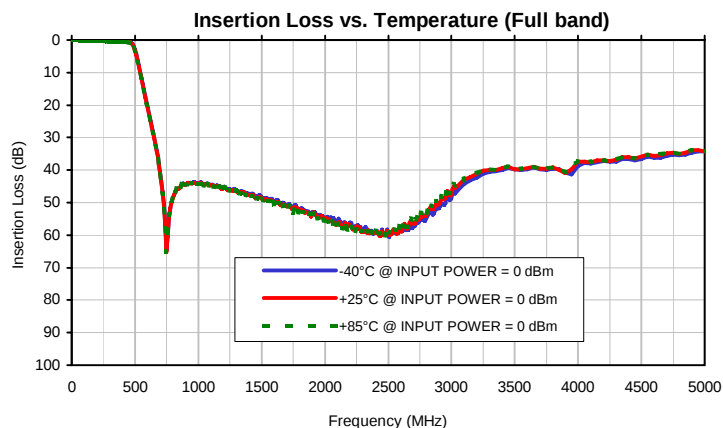


Typical Performance Curves

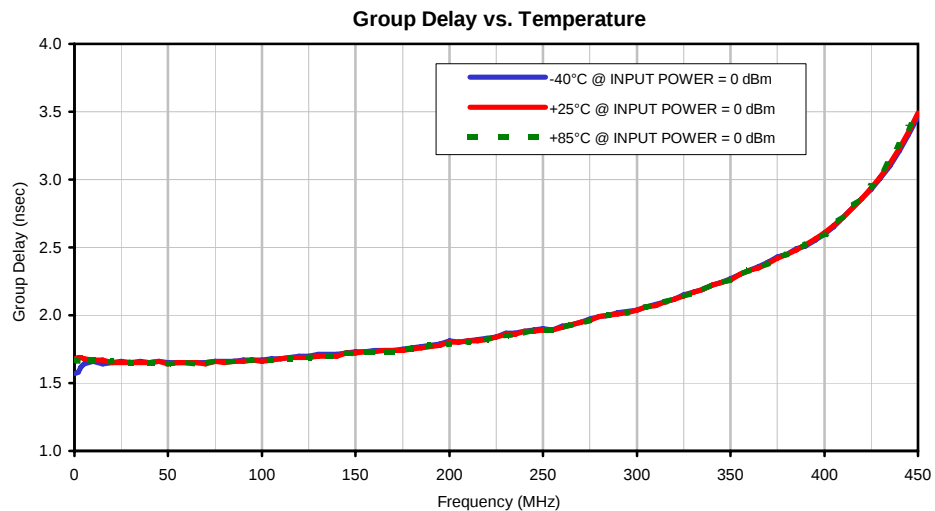


Outline Dimensions

H16

STANDARD

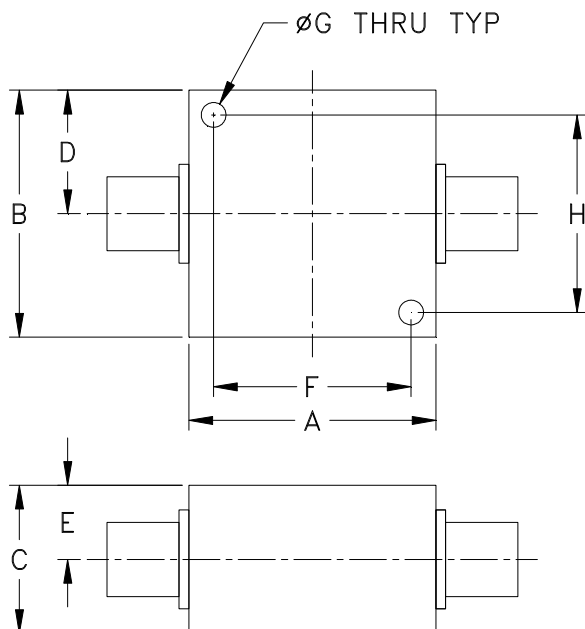

OPTION "B"

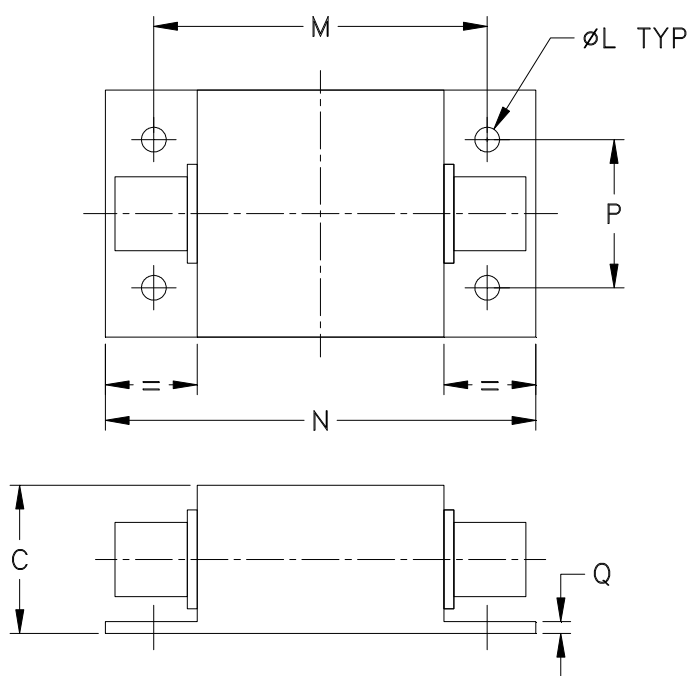

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
H16	1.25 (31.75)	1.25 (31.75)	.75 (19.05)	.63 (16.00)	.38 (9.65)	1.000 (25.40)	.125 (3.18)	1.000 (25.40)	--	--	.125 (3.18)	1.688 (42.88)	2.18 (55.37)

CASE#	P	Q	WT.GRAMS
H16	.750 (19.05)	.06 (1.52)	70

Dimensions are in inches (mm). Tolerances: 2PL. $\pm .03$; 3PL. $\pm .015$

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
3. Mounting bracket available on request. Add suffix B to part number.
4. Bracket version, option B, dimension "C" changes from .75 to .94 inches when connectors are type N.
5. Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS