



COAXIAL

Medium Power Amplifier


ZHL-10M1G01W1+
ZHL-10M1G01W1X+

Mini-Circuits

50Ω 10 to 1000 MHz Broadband 1.3W SMA-Female

KEY FEATURES

- Broadband, 10 to 1000 MHz
- High Gain, 34 dB typ.
- High P1dB, +31 dBm, typ.
- High OIP3, +45 dBm typ.

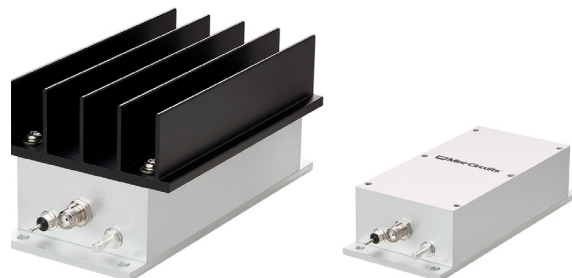


Generic photo used for illustration purposes only

APPLICATIONS

- Communication Systems
- R&D, Production, and Test Systems
- Test & Measurement Equipment
- General Laboratory Applications

FUNCTIONAL DIAGRAM

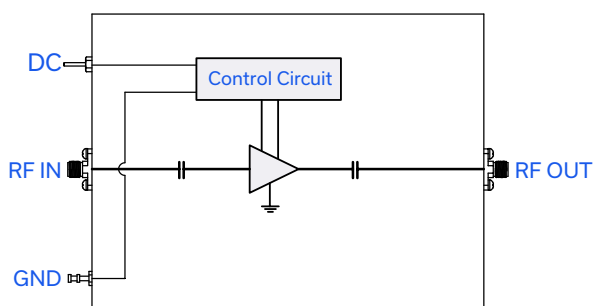

PRODUCT OVERVIEW

The ZHL-10M1G01W1(X)+ is a medium power broadband amplifier providing more than 1W of output power with a typical small signal gain of 34dB over the 10 to 1000 MHz frequency band. The amplifier uses state-of-the-art semiconductor technology and can be used in a wide range of applications. A single supply voltage ensures ease of operation. The amplifier is made with a rugged aluminum housing and can be supplied with or without a heatsink.

ELECTRICAL SPECIFICATIONS AT $T_{\text{MOUNTING BASE}} = +25^{\circ}\text{C}$, $V_{\text{DS}} = +24\text{V}$

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Frequency Range	f		10		1000	MHz
Small Signal Gain	G_{SS}	$P_{\text{OUT}} = -25\text{dBm}$	31	34	39	dB
Small Signal Gain Flatness	$G_{\text{SS-FLAT}}$	$P_{\text{OUT}} = -25\text{dBm}$		± 0.2	± 1.3	dB
Output Power at 1dB compression	$P_{1\text{dB}}$	$P_{\text{OUT-REF}} = +15\text{dBm}$	+29	+31		dBm
Output Power at 3dB compression	$P_{3\text{dB}}$	$P_{\text{OUT-REF}} = +15\text{dBm}$	+31	+32		dBm
Noise Figure	NF			6.3		dB
Output Third Order Intercept Point	OIP3	$P_{\text{OUT}} = +20\text{dBm/ tone}$		+45		dBm
Input Return Loss	I-RL	$P_{\text{OUT}} = -25\text{dBm}$	9.5	26		dB
Output Return Loss	O-RL	$P_{\text{OUT}} = -25\text{dBm}$	9	21		dB
DC Supply Voltage	V_{DC}			24	25	V
Supply Current	I_{DC}	Without fan @ $P_{\text{OUT}} = +29\text{dBm}$		0.6	0.7	A
		With fan @ $P_{\text{OUT}} = +29\text{dBm}$		1.0	1.1	

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-019297
ZHL-10M1G01W1+
MCL NY
230922

PAGE 1 OF 5



COAXIAL







Medium Power Amplifier

ZHL-10M1G01W1+
ZHL-10M1G01W1X+

Mini-Circuits

50Ω 10 to 1000 MHz Broadband 1.3W SMA-Female

TYPICAL PERFORMANCE DATA AT $T_{\text{MOUNTINGBASE}} = +25^{\circ}\text{C}$, $V_{\text{DC}} = +24\text{V}$, 50 OHM

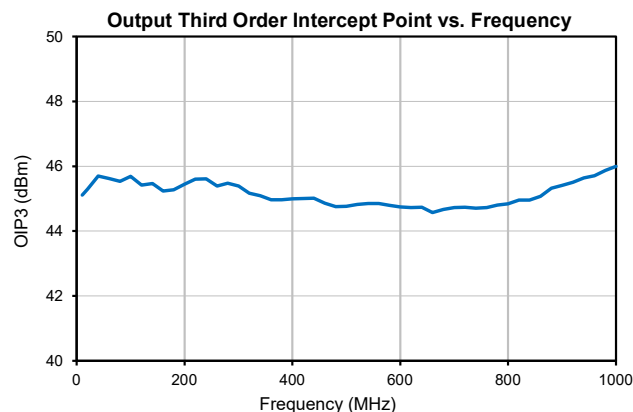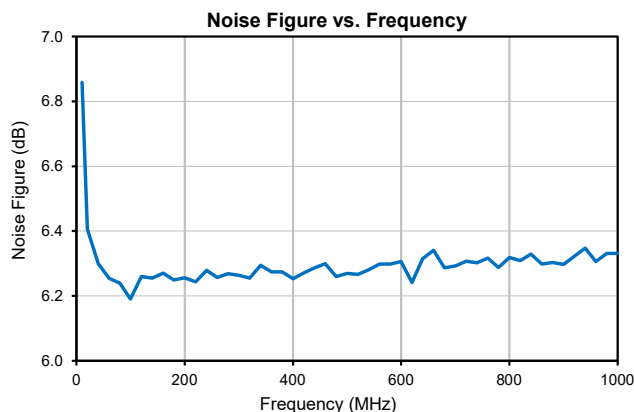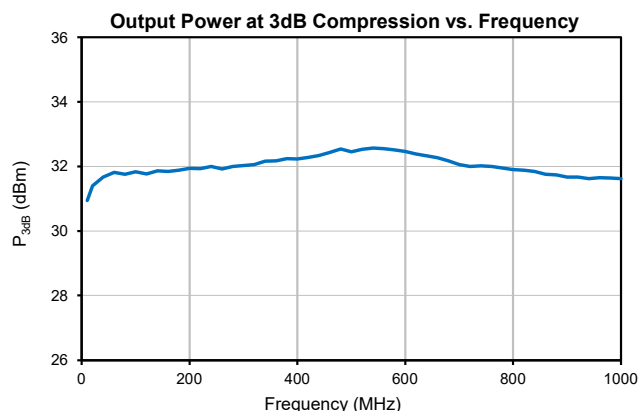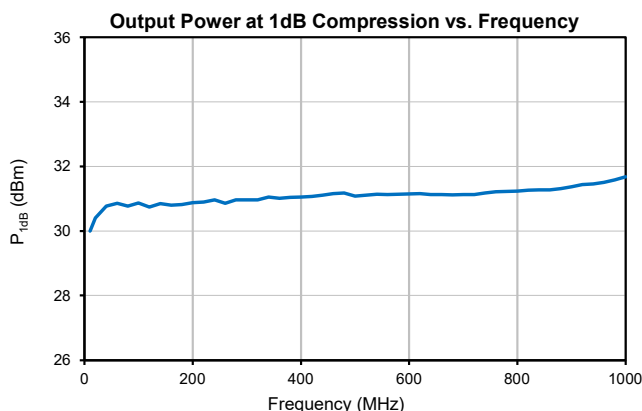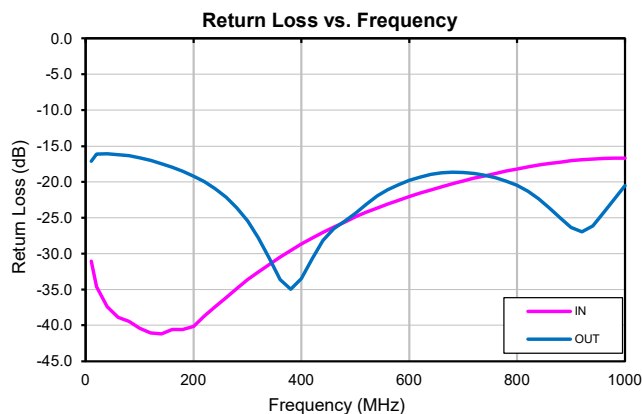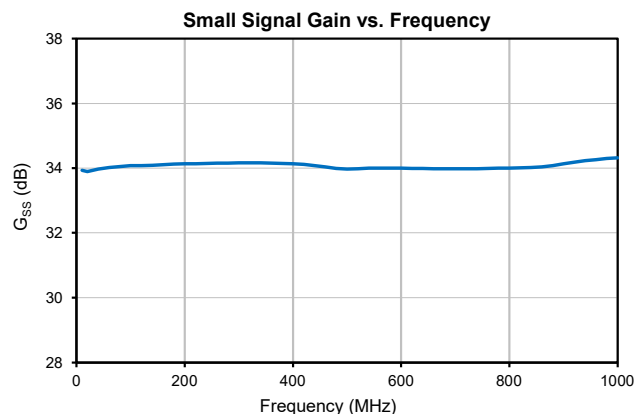

Mini-Circuits



COAXIAL

Medium Power Amplifier

ZHL-10M1G01W1+
ZHL-10M1G01W1X+

Mini-Circuits

50Ω 10 to 1000 MHz Broadband 1.3W SMA-Female

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	ZHL-10M1G01W1+ T_{AMBIENT} : -20 °C to +60 °C
	ZHL-10M1G01W1X+ $T_{\text{MOUNTING BASE}}$: -20 °C to +85 °C
Storage Temperature	-55°C to +100°C
No damage with an open or short at $P_{\text{OUT}} = +28 \text{ dBm CW}$	
RF Input Power (no damage)	+5 dBm
DC Operating Voltage	± 25 V

Permanent damage may occur if any of these limits are exceeded.

DETERMINING MAXIMUM THERMAL RESISTANCE OF USERS' EXTERNAL HEAT SINK

$\text{MAXIMUM THERMAL RESISTANCE} = \frac{\text{MAXIMUM OPERATING CASE TEMP} - \text{MAXIMUM USER AMBIENT TEMP}}{\text{POWER DISSIPATION}}$
Example: MAXIMUM MOUNTING BASE TEMP = +85 °C (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE) MAXIMUM USER AMBIENT TEMP = +60 °C (USER DEFINED) POWER DISSIPATION = 16.2 WATTS (CHECK MAXIMUM RATINGS TABLE FOR THIS VALUE) THEN MAXIMUM ALLOWABLE THERMAL RESISTANCE = 1.54 °C/W

Mini-Circuits



COAXIAL

Medium Power Amplifier

ZHL-10M1G01W1+
ZHL-10M1G01W1X+


Mini-Circuits

50Ω 10 to 1000 MHz Broadband 1.3W SMA-Female


COAXIAL CONNECTIONS

IN (RF IN)	SMA-Female
OUT (RF OUT)	SMA-Female

CASE STYLE DRAWING WITH HEATSINK (ZHL-10M1G01W1+)

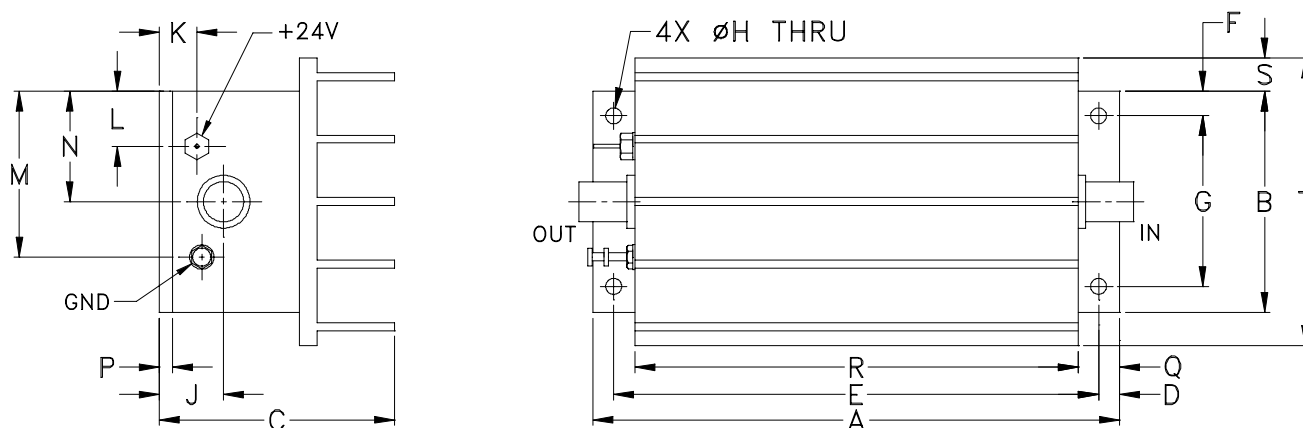

CASE STYLE DRAWING WITHOUT HEATSINK (ZHL-10M1G01W1X+)

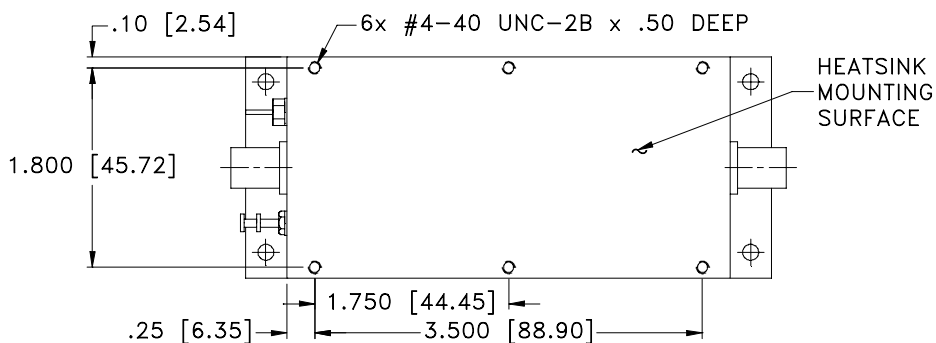OUTLINE DIMENSIONS (Inch
mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
4.75	2.00	2.12	.19	4.375	.23	1.540	.144	.58	.34	.50	1.50	1.00	.12	.38	4.00	.30	2.60	grams*
120.65	50.80	53.85	4.83	111.13	5.84	39.12	3.66	14.73	8.64	12.70	38.10	25.40	3.05	9.65	101.60	7.62	66.04	440.0

*325 grams without heatsink

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 4 OF 5



Medium Power Amplifier

ZHL-10M1G01W1+
ZHL-10M1G01W1X+

50Ω 10 to 1000 MHz Broadband 1.3W SMA-Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD.

Performance Data	Table
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
RoHS Status	Compliant
Environmental Ratings	ENV23T15

ORDERING INFORMATION

Model No. Links	ZHL-10M1G01W1+	ZHL-10M1G01W1X+
Option	With heatsink	Without heatsink
Product Marking	ZHL-10M1G01W1+	ZHL-10M1G01W1X+
Case Style	T34	
Connector	IN (SMA-Female) / OUT (SMA-Female)	







NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html




Typical Performance Data

Frequency (MHz)	Gain (dB)	Isolation (dB)	Return Loss (dB)		P _{OUT} @ 1dB Compression (dBm)	P _{OUT} @ 3dB Compression (dBm)	P _{OUT} @ Saturation (dBm)	OIP3 (dBm)	Noise Figure (dB)
	24V	24V	IN 24V	OUT 24V	24V	24V	24V	24V	24V
10	33.93	64.25	31.06	17.11	30.00	30.95	31.26	45.10	6.86
20	33.90	63.91	34.63	16.12	30.40	31.40	31.67	45.29	6.41
40	33.97	63.70	37.41	16.07	30.77	31.68	31.85	45.70	6.30
60	34.02	63.64	38.87	16.19	30.86	31.82	32.08	45.63	6.25
80	34.05	63.40	39.46	16.36	30.77	31.76	32.14	45.54	6.24
100	34.08	63.37	40.44	16.63	30.87	31.84	32.23	45.69	6.19
120	34.08	63.34	41.07	17.00	30.74	31.76	32.20	45.42	6.26
140	34.09	63.28	41.20	17.45	30.84	31.87	32.28	45.46	6.25
160	34.11	63.13	40.59	17.96	30.80	31.85	32.28	45.24	6.27
180	34.12	63.11	40.59	18.54	30.82	31.88	32.31	45.27	6.25
200	34.13	63.06	40.14	19.20	30.88	31.94	32.34	45.45	6.26
220	34.14	62.91	38.68	19.99	30.90	31.93	32.29	45.60	6.24
240	34.15	62.84	37.38	20.94	30.97	32.00	32.34	45.61	6.28
260	34.15	62.79	36.13	22.12	30.86	31.93	32.26	45.39	6.26
280	34.16	62.74	34.87	23.59	30.97	32.00	32.31	45.48	6.27
300	34.16	62.56	33.61	25.46	30.97	32.03	32.31	45.40	6.26
320	34.16	62.45	32.60	27.79	30.97	32.06	32.32	45.17	6.26
340	34.16	62.42	31.50	30.62	31.05	32.17	32.43	45.09	6.29
360	34.16	62.25	30.48	33.64	31.01	32.18	32.45	44.97	6.27
380	34.15	62.20	29.54	34.98	31.05	32.24	32.52	44.97	6.27
400	34.14	62.11	28.68	33.47	31.05	32.24	32.52	44.99	6.25
420	34.11	62.03	27.85	30.71	31.07	32.27	32.57	45.00	6.27
440	34.08	61.89	27.04	28.20	31.11	32.34	32.62	45.02	6.29
460	34.04	61.83	26.29	26.52	31.16	32.43	32.69	44.86	6.30
480	33.99	61.78	25.58	25.47	31.19	32.54	32.76	44.76	6.26
500	33.98	61.71	24.88	24.40	31.08	32.46	32.69	44.76	6.27
520	33.99	61.54	24.24	23.13	31.11	32.53	32.75	44.82	6.27
540	34.00	61.37	23.64	21.99	31.14	32.57	32.77	44.86	6.28
560	34.00	61.29	23.08	21.09	31.13	32.56	32.71	44.86	6.30
580	34.00	61.14	22.55	20.37	31.14	32.52	32.65	44.80	6.30
600	34.00	60.99	22.05	19.80	31.15	32.47	32.54	44.75	6.31
620	34.00	60.85	21.55	19.34	31.15	32.39	32.44	44.73	6.24
640	33.99	60.67	21.11	18.98	31.13	32.33	32.38	44.74	6.32
660	33.98	60.59	20.66	18.75	31.13	32.27	32.31	44.57	6.34
680	33.98	60.45	20.25	18.65	31.12	32.18	32.20	44.67	6.29
700	33.98	60.29	19.87	18.68	31.13	32.07	32.07	44.73	6.29
720	33.98	60.18	19.50	18.83	31.14	32.00	32.01	44.74	6.31
740	33.99	59.95	19.16	19.08	31.18	32.02	32.03	44.71	6.30
760	33.99	59.82	18.82	19.43	31.21	32.00	32.01	44.73	6.32
780	34.00	59.66	18.49	19.89	31.23	31.96	31.97	44.81	6.29
800	34.00	59.48	18.18	20.50	31.24	31.91	31.92	44.84	6.32
820	34.01	59.27	17.91	21.30	31.26	31.88	31.91	44.96	6.31
840	34.02	59.13	17.65	22.35	31.27	31.85	31.87	44.96	6.33
860	34.04	58.95	17.43	23.63	31.28	31.76	31.80	45.08	6.30
880	34.08	58.67	17.22	25.05	31.31	31.74	31.80	45.32	6.30
900	34.13	58.48	17.06	26.38	31.38	31.66	31.76	45.41	6.30
920	34.18	58.29	16.92	26.95	31.44	31.67	31.78	45.51	6.32
940	34.23	58.04	16.82	26.11	31.47	31.62	31.78	45.64	6.35
960	34.27	57.86	16.73	24.32	31.51	31.65	31.82	45.72	6.31
980	34.30	57.67	16.69	22.37	31.59	31.64	31.84	45.87	6.33
1000	34.32	57.45	16.68	20.53	31.68	31.63	31.85	46.00	6.33


Typical Performance Curves

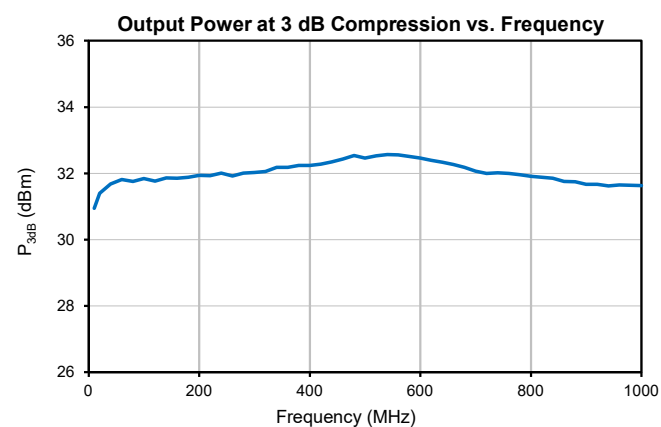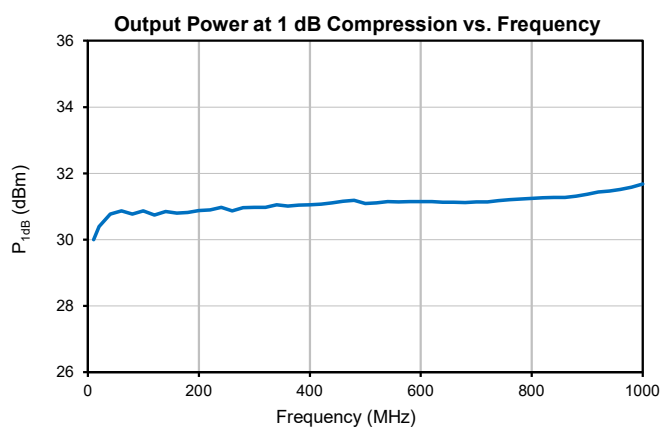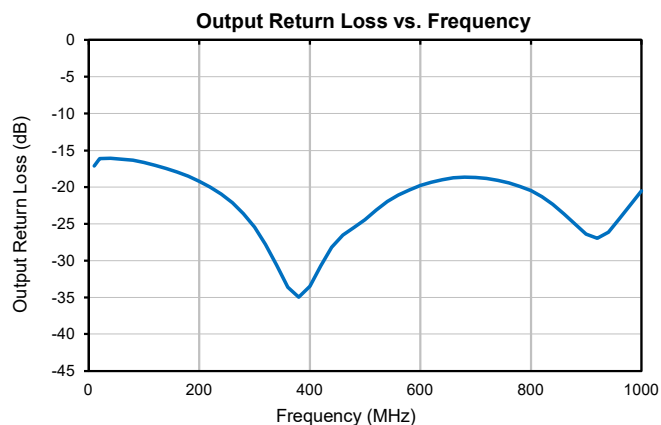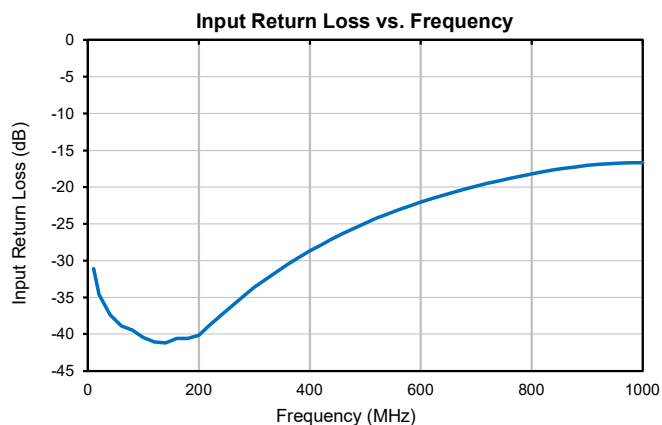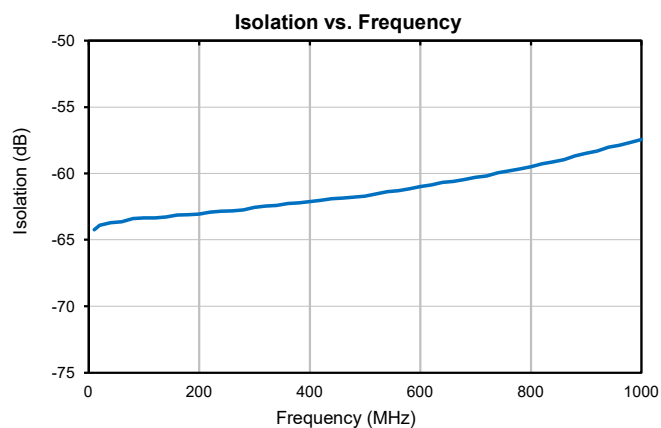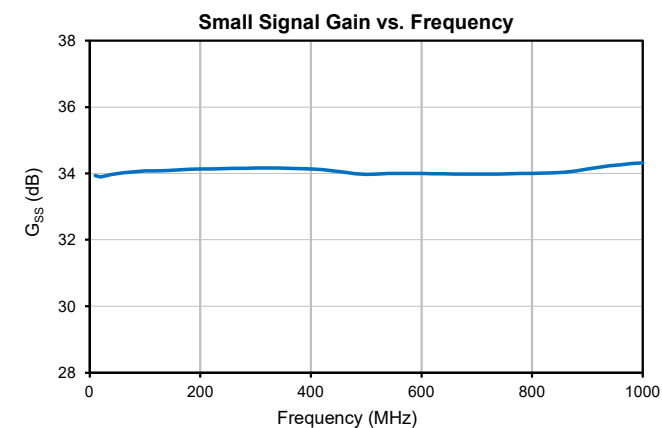


Typical Performance Curves

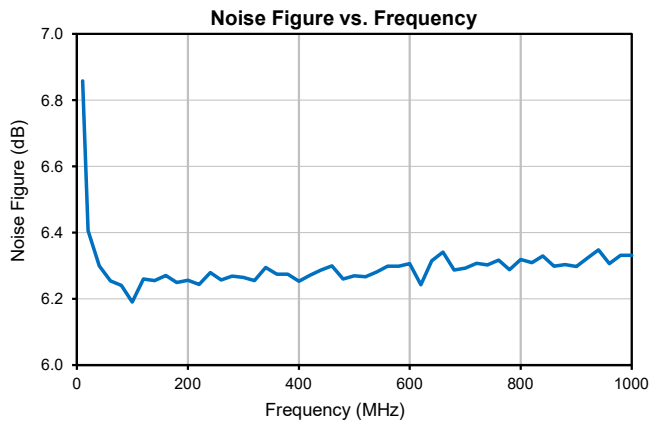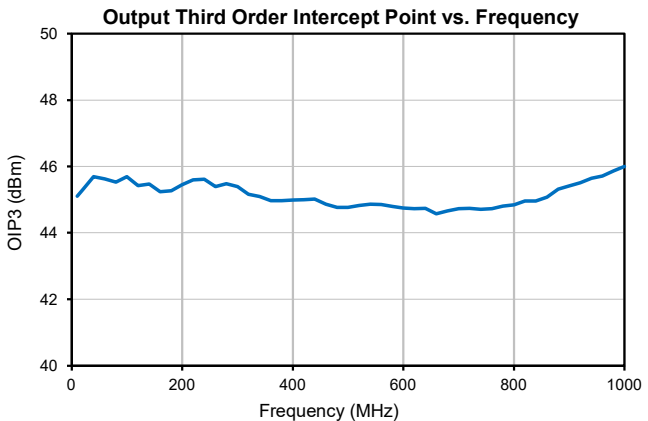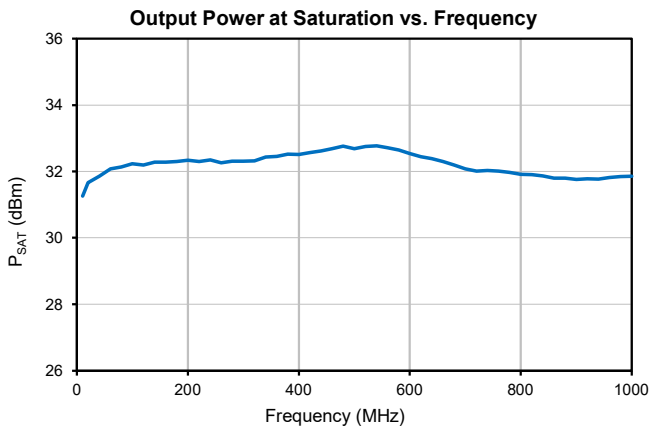

Outline Dimensions

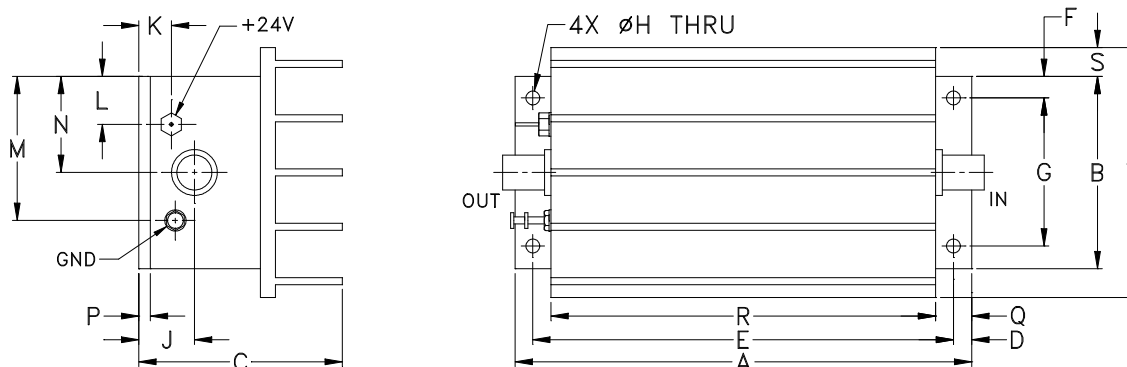

MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK

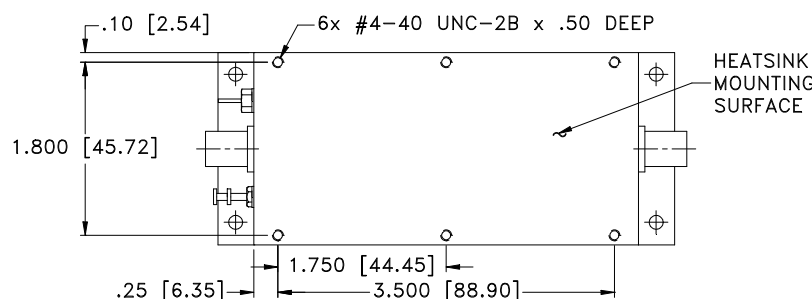

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
T34	4.75 (120.65)	2.00 (50.80)	2.12 (53.85)	.19 (4.83)	4.375 (111.13)	.23 (5.84)	1.540 (39.12)	.144 (3.66)	.58 (14.73)	.34 (8.64)	.50 (12.70)	1.50 (38.10)	1.00 (25.40)

CASE#	P	Q	R	S	T	WT. GRAMS	WT. WITHOUT HEATSINK GRAMS
T34	.12 (3.05)	.38 (9.65)	4.00 (101.60)	.30 (7.62)	2.60 (66.04)	440.0	325.0

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish and mounting bracket finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.
- Heat sink finish: Black anodize.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-20° to 65° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Stabilization Bake	(non-operating) 125°C, 24 hours	- - -
Burn-in at Elevated Temp.	(DC on) 160 hours at 85° C	MIL-STD-202, Method 108
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, except 100°C