



(LTCC) COAXIAL

Low Pass Filter

ZLFV-K1552+

50Ω DC to 15.5 GHz 2.92mm Female

KEY FEATURES

- Low Insertion Loss, 1.4 dB Typ.
- Return Loss, 15 dB Typ.
- Stop Band Rejection, 45 dB Typ.
- Broadband Connectorized Package.
- Power Handling: 6.5 Watts.

APPLICATIONS

- Test and Measurement Equipment.
- 5G MIMO & Back Haul Radio Systems.
- EW, Radar and ECM Defense Systems




Generic photo used for illustration purposes only

PRODUCT OVERVIEW

ZLFV-K1552+ is a 50Ω low pass filter built in broadband connectorized package. Covering DC-15.5 GHz bandwidth, these units offer good matching within the passband and good rejection in stopband. ZLFV-K1552 + offer low insertion loss, and good power handling capability. It handles up to 6.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

FUNCTIONAL DIAGRAM

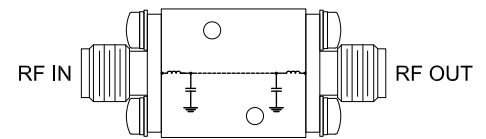

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units	
Pass Band	Insertion Loss	DC-F1	DC- 14	—	1.4	2.2	dB
		F1-F2	14 - 15.5	—	2.0	—	
	Freq. Cut-Off ³	F _c ³	16.9	—	3	—	dB
	Return Loss	DC-F1	DC - 15.5	—	15	—	dB
Stop Band	Rejection	F3-F4	21.2 - 23	20	36	—	
		F4-F5	23 - 26.5	25	33	—	dB
		F5-F6	26.5 - 40	—	30	—	

1. This filter is bi-directional, RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

2. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

3. Typical variation ± 5%


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C
Input Power ⁵	6.5 W @25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 1.4 W at +125°C.

TYPICAL FREQUENCY RESPONSE

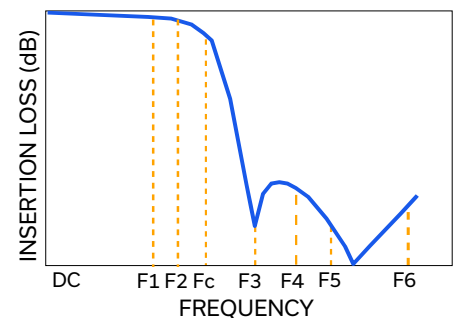



(LTCC) COAXIAL





Low Pass Filter

ZLFV-K1552+

Mini-Circuits

50Ω DC to 15.5 GHz 2.92mm Female

TYPICAL PERFORMANCE GRAPHS

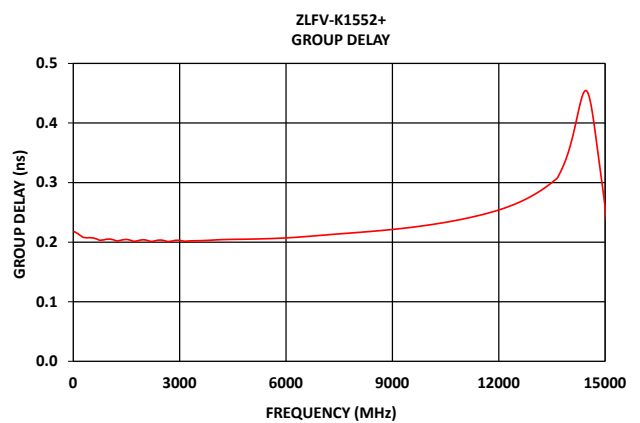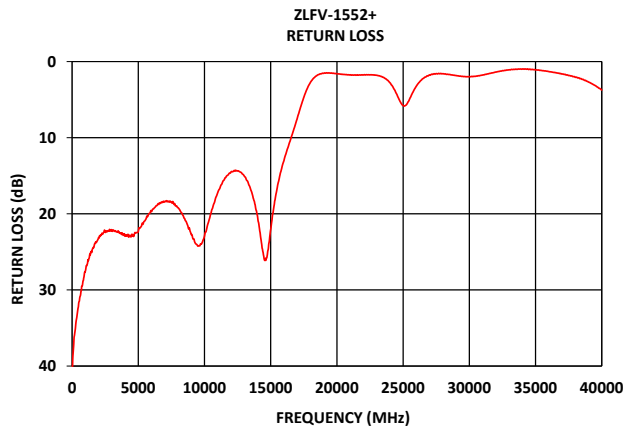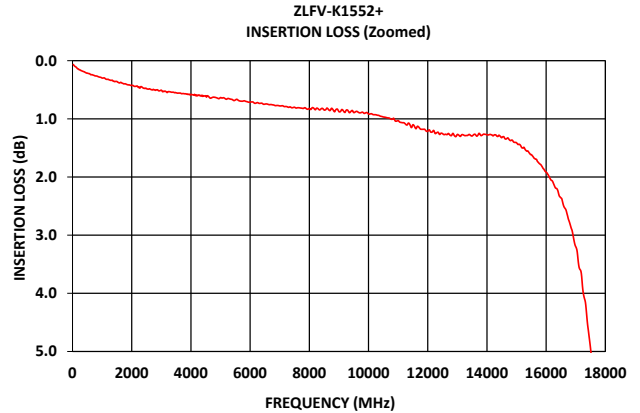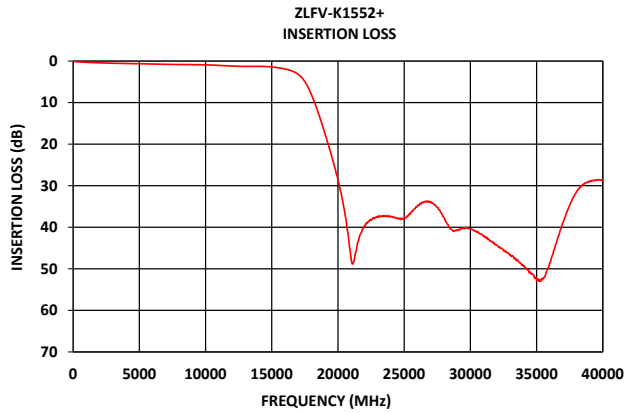



(LTCC) COAXIAL

Low Pass Filter


ZLFV-K1552+

50Ω DC to 15.5 GHz 2.92mm Female

CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 ¹	1	2.92mm Female
RF2 ¹	2	2.92mm Female

CASE STYLE DRAWING

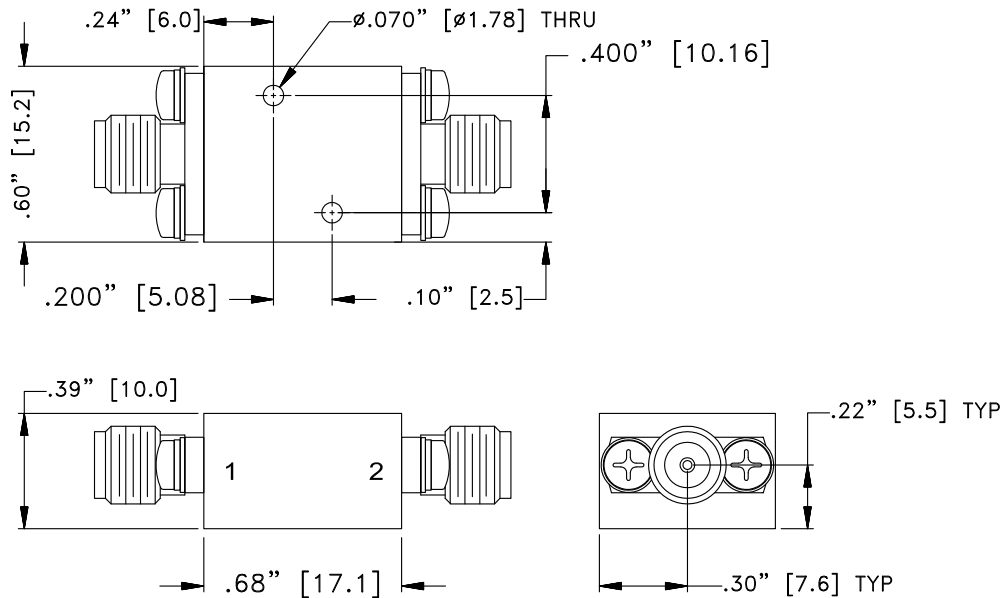

Unit weight: 24grams

Dimensions are in inches (mm). Tolerances: 2 Pl.±.050"; 3 Pl.±.015"

PRODUCT MARKING*: ZLFV-K1552+

*Marking may contain other features or characters for internal lot control.



(LTCC) COAXIAL

Low Pass Filter

ZLHV-K1552+

50Ω DC to 15.5 GHz 2.92mm Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	UK3042
RoHS Status	Compliant
Environmental Ratings	ENV124

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html







Coaxial Low Pass Filter

ZLFV-K1552+

Typical Performance Data


FREQ.	Insertion Loss	Input Return Loss	Output Return Loss	FREQ.	Group Delay
(MHz)	(dB)	(dB)	(dB)	(MHz)	(ns)
25	0.07	40.78	40.91	25	0.22
50	0.08	39.08	39.21	50	0.22
75	0.09	38.37	38.17	150	0.21
100	0.10	37.77	37.38	200	0.21
125	0.11	37.12	36.83	300	0.21
200	0.14	35.68	35.47	400	0.21
300	0.17	34.15	33.99	500	0.21
400	0.19	33.01	32.72	800	0.20
500	0.21	31.72	31.47	1000	0.21
600	0.23	30.86	30.55	1200	0.20
700	0.25	30.08	29.86	1300	0.20
800	0.26	29.15	28.88	1400	0.20
900	0.28	28.27	27.95	1450	0.20
1000	0.30	27.53	27.31	1500	0.20
1500	0.36	24.91	24.77	1550	0.20
2000	0.42	23.11	23.22	1600	0.20
2500	0.48	22.42	22.40	1650	0.20
3000	0.51	22.26	22.06	1700	0.20
3500	0.55	22.32	21.48	1750	0.20
4000	0.58	22.94	20.94	1800	0.20
4500	0.60	22.87	20.51	1850	0.20
5000	0.63	22.35	20.06	1900	0.20
6000	0.71	19.71	19.85	2000	0.20
7000	0.78	18.39	20.41	2100	0.20
8000	0.82	19.19	22.14	2300	0.20
9000	0.88	22.73	27.03	2400	0.20
10000	0.92	22.91	24.72	2500	0.20
12000	1.21	14.50	14.00	2600	0.20
14000	1.28	20.28	22.06	2800	0.20
15500	1.61	16.51	18.00	2900	0.20
16000	1.92	13.02	15.27	3000	0.20
16900	2.98	8.03	10.44	3200	0.20
18000	8.08	2.73	3.34	3400	0.20
20000	28.69	1.60	1.63	3600	0.20
21200	48.23	1.75	1.57	3800	0.20
22000	39.60	1.75	1.43	3900	0.20
23000	37.66	1.80	1.20	4000	0.20
24000	37.43	2.77	1.23	4200	0.20
25000	37.92	5.77	1.81	4400	0.20
26000	34.93	3.21	3.37	4600	0.20
26500	33.86	2.24	4.21	4800	0.20
27000	33.85	1.75	4.55	5000	0.21
28000	37.64	1.59	4.64	6000	0.21
29000	40.69	1.83	4.90	7000	0.21
30000	40.35	1.98	2.81	8000	0.22
31000	42.25	1.77	1.54	9000	0.22
32000	44.34	1.37	1.02	10000	0.23
32500	45.70	1.19	0.91	11000	0.24
33000	46.55	1.08	0.86	11500	0.25
33500	47.97	0.99	0.87	12000	0.25
34000	49.34	0.98	0.91	12500	0.26
34500	50.80	1.04	1.02	13000	0.28
35000	52.80	1.09	1.18	13500	0.30
35500	52.25	1.19	1.43	14000	0.36
36000	48.54	1.31	1.76	14500	0.45
36500	43.73	1.45	2.27	15000	0.26
37000	38.83	1.62	3.07	15100	0.20
38000	31.55	2.07	5.38	15200	0.07
39000	29.03	2.68	3.77	15300	-0.15
40000	28.54	3.73	2.26	15500	-0.25

Typical Performance Curves

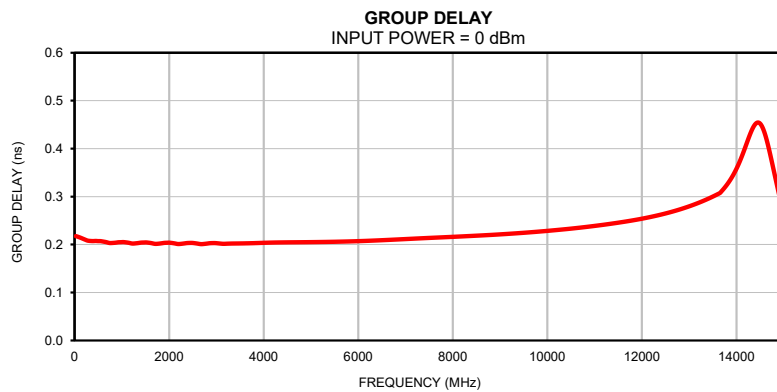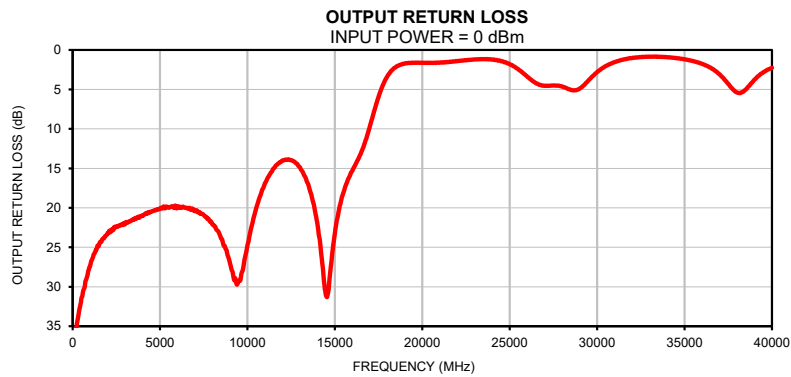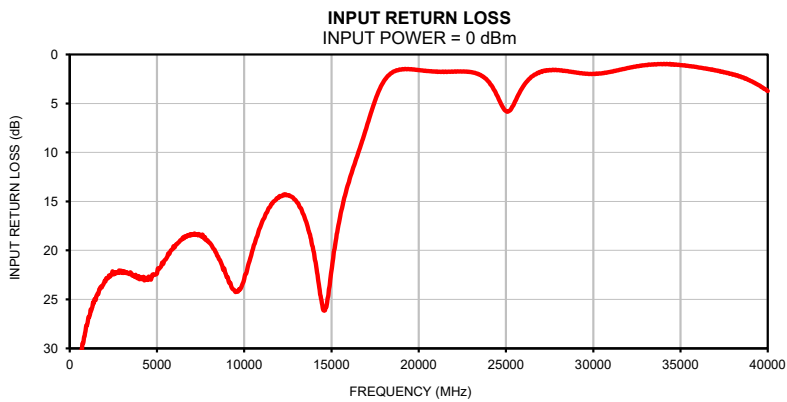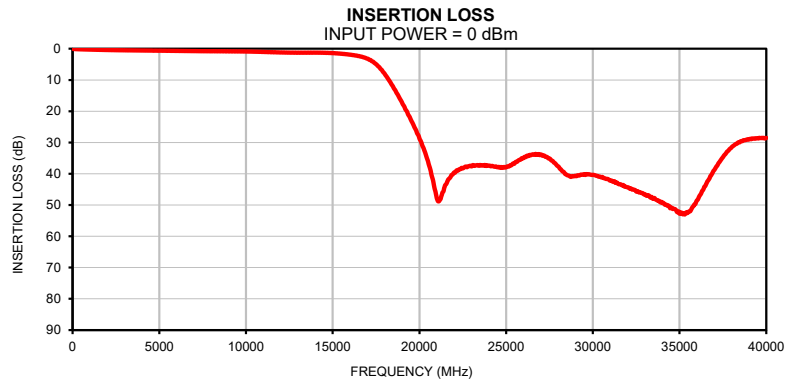

Outline Dimensions

UK3042

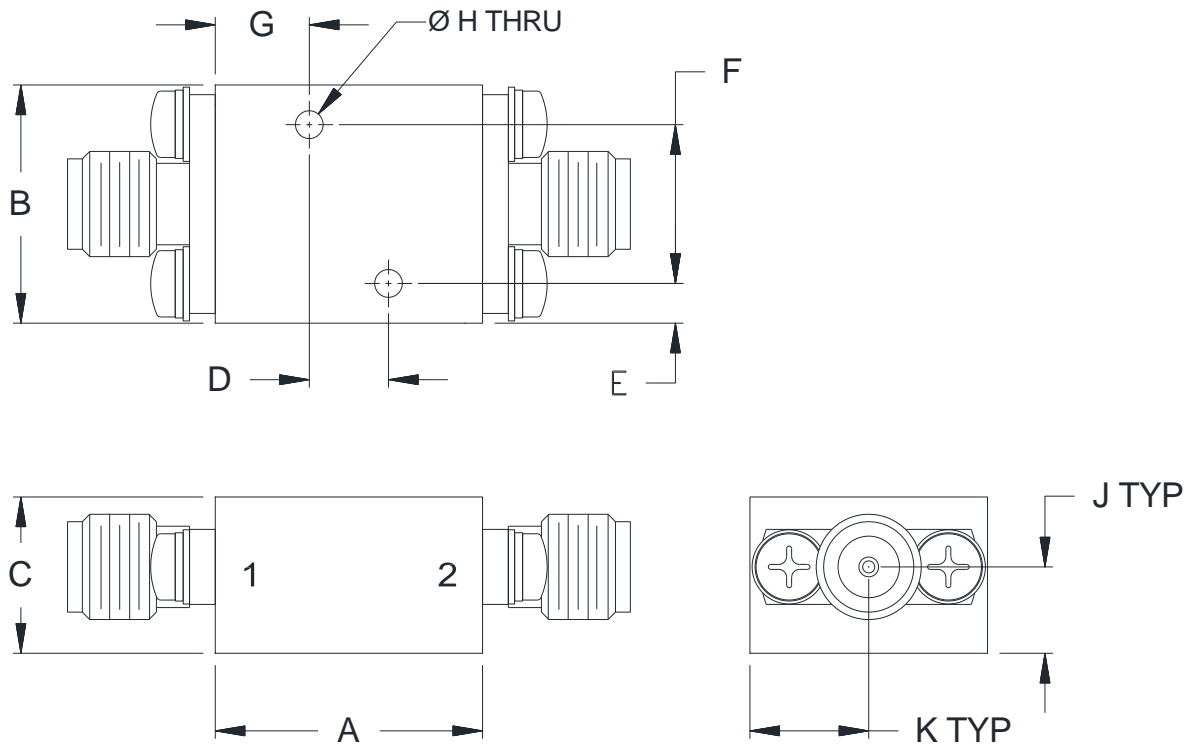

CASE#	A	B	C	D	E	F
UK3042	.68 (17.1)	.60 (15.2)	.39 (10.0)	.200 (5.08)	.10 (2.5)	.400 (10.16)

CASE#	G	H	J	K	WT.GRAMS
UK3042	.24 (6.0)	.070 (1.78)	.22 (5.5)	.30 (7.6)	24

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .050$; 3 Pl. $\pm .015$

Notes:

1. Case material: Brass alloy.
2. Case Finish:
 - a. Case & Cover of the units –Gold plating.
3. Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet