Engineering Development Model

Power Splitter/Combiner ZN6PD-ED6515A/2

6 Way-0°

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability.
At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.

Please click "Back", and then click "Contact Us" for Applications support.

CASE STYLE : Z259

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C					
Parameter		**Min.**	**Typ.**	**Max.**	**Units**
Frequency		312		1884	MHz
Isolation	**312 - 1884 MHz**		28		dB
Insertion Loss Above 7.8 dB	**312 - 1884 MHz**		0.48		dB
Phase Unbalance	**312 - 1884 MHz**		1.192		deg.
Amplitude Unbalance	**312 - 1884 MHz**		0.205		dB
VSWR	**SUM Port**		1.38		(:1)
	OUT Ports		1.10		(:1)

MAXIMUM RATINGS	
Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C

PIN CONNECTIONS	
SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4
PORT 5	5
PORT 6	6

Functional Diagram

6 Way-0° Power Splitter/Combiner ZN6PD-ED6515A/2

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS[1] (dB)			AMP. UNBAL. (dB)	ISOLATION (dB)		PHASE UNBAL. (deg.)
	S-1	S-3	S-5		1-2	3-4	
312	8.38	8.33	8.45	0.19	12.68	24.27	0.52
346	8.18	8.13	8.26	0.19	13.94	24.90	0.45
380	8.06	8.00	8.14	0.19	15.27	25.66	0.45
414	8.01	7.96	8.08	0.18	16.64	26.60	0.51
448	8.01	7.96	8.10	0.19	18.02	27.70	0.49
482	8.03	7.98	8.12	0.18	19.38	29.00	0.51
516	8.05	8.01	8.14	0.18	20.71	30.55	0.54
550	8.09	8.04	8.17	0.18	22.07	32.32	0.54
560	8.09	8.05	8.19	0.18	22.48	32.89	0.50
580	8.09	8.05	8.18	0.18	23.34	34.16	0.61
600	8.09	8.05	8.17	0.17	24.28	35.56	0.62
610	8.08	8.04	8.17	0.18	24.79	36.34	0.64
714	8.05	8.01	8.13	0.17	33.80	47.02	0.69
818	8.05	8.02	8.14	0.16	34.14	42.59	0.88
922	8.09	8.06	8.19	0.15	26.19	39.69	1.07
1026	8.14	8.11	8.24	0.13	23.67	40.07	1.08
1130	8.18	8.13	8.26	0.13	22.99	42.24	1.16
1234	8.25	8.20	8.32	0.12	23.35	45.96	1.15
1338	8.33	8.26	8.37	0.11	24.14	52.09	1.23
1442	8.36	8.29	8.40	0.13	24.23	55.35	1.42
1546	8.33	8.27	8.38	0.18	23.52	41.04	1.49
1650	8.31	8.26	8.38	0.24	22.42	33.53	1.66
1660	8.31	8.26	8.38	0.23	22.19	32.97	1.67
1680	8.33	8.28	8.40	0.25	21.63	31.96	1.74
1700	8.35	8.30	8.42	0.25	20.96	31.03	1.82
1710	8.36	8.32	8.43	0.25	20.58	30.58	1.72
1739	8.41	8.37	8.48	0.27	19.44	29.40	1.86
1768	8.50	8.46	8.55	0.29	18.27	28.36	2.00
1797	8.61	8.57	8.66	0.31	17.19	27.45	2.10
1826	8.74	8.71	8.78	0.31	16.24	26.62	2.20
1855	8.88	8.86	8.93	0.34	15.44	25.86	2.34
1884	9.02	9.01	9.05	0.35	14.78	25.14	2.48

FREQ. (MHz)	VSWR (:1)		
	S	1	3
312	1.97	1.25	1.22
346	1.66	1.18	1.16
380	1.44	1.16	1.14
414	1.32	1.15	1.13
448	1.30	1.11	1.10
482	1.32	1.10	1.10
516	1.35	1.10	1.10
550	1.38	1.07	1.08
560	1.38	1.06	1.08
580	1.38	1.06	1.08
600	1.37	1.06	1.08
610	1.36	1.06	1.08
714	1.23	1.04	1.07
818	1.14	1.05	1.06
922	1.19	1.08	1.05
1026	1.27	1.08	1.04
1130	1.28	1.08	1.05
1234	1.21	1.11	1.08
1338	1.24	1.12	1.10
1442	1.29	1.08	1.07
1546	1.27	1.05	1.08
1650	1.09	1.05	1.08
1660	1.08	1.05	1.07
1680	1.10	1.08	1.07
1700	1.16	1.10	1.10
1710	1.20	1.10	1.11
1739	1.34	1.10	1.12
1768	1.48	1.10	1.10
1797	1.63	1.13	1.12
1826	1.78	1.14	1.15
1855	1.92	1.15	1.16
1884	2.04	1.18	1.17

[1] Total Loss = Insertion Loss + 7.8dB Splitter Loss

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

6 Way-0° Power Splitter/Combiner ZN6PD-ED6515A/2

Typical Performance Curves

Total Loss

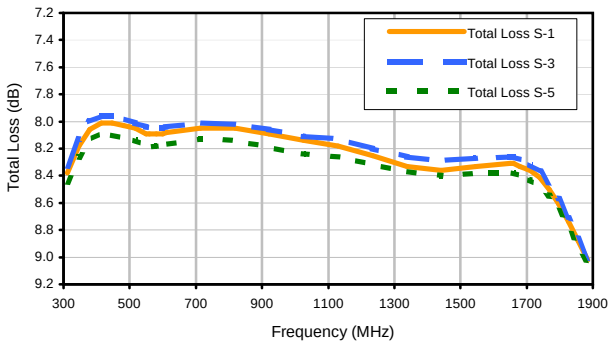

Isolation

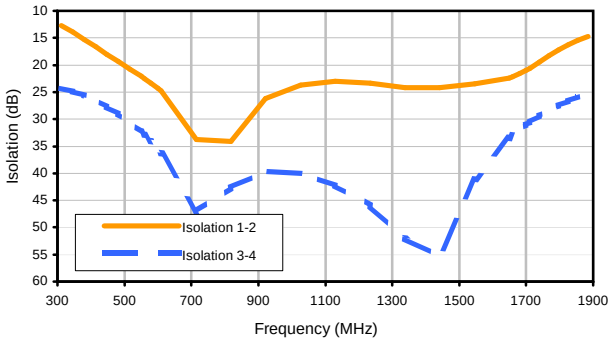

Amplitude Unbalance

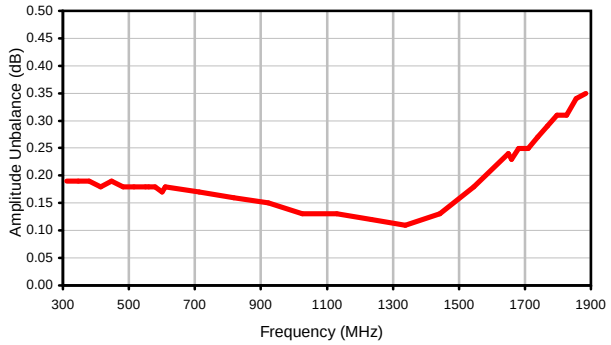

Phase Unbalance

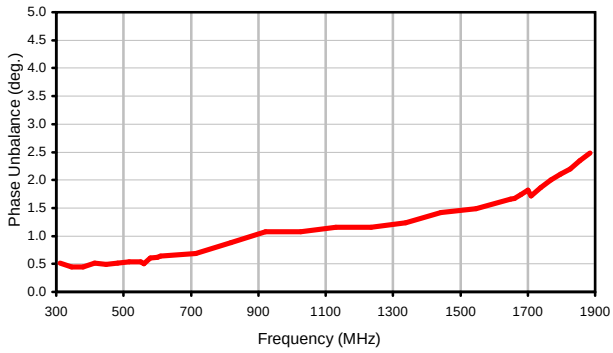

VSWR

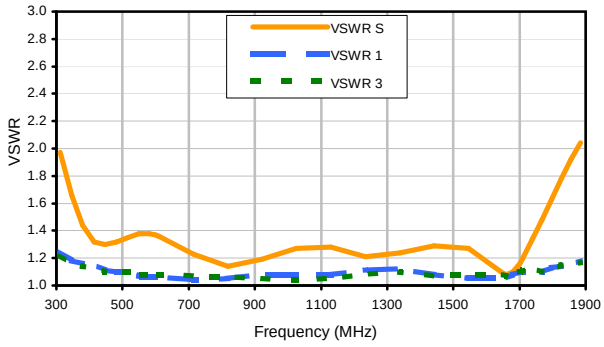

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style Z

Z259

Outline Dimensions

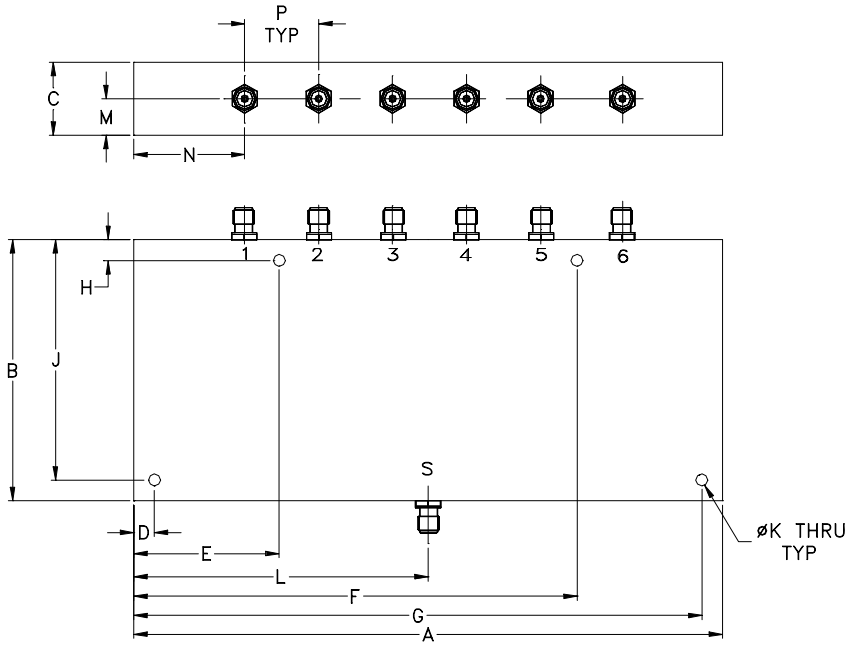

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
Z259	7.06 (179.32)	3.13 (79.50)	.88 (22.35)	.250 (6.35)	1.750 (44.45)	5.310 (134.87)	6.810 (172.97)	.250 (6.35)	2.875 (73.03)	.144 (3.66)	3.53 (89.66)	.44 (11.18)	1.31 (33.27)

CASE#	P	WT.GRAMS
Z259	.89 (22.61)	800

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .03; 3 Pl. ± .015

Notes:

1. Case material: Aluminum alloy.
2. Case finish:
   For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits