


Band Pass Cavity Filter

Coaxial

ZVBP-EDU2205

Important Note

This model has been designed, built and tested in our engineering department. Performance data represents model capability. At present it is a non-catalog model. On request, we can supply a final specification sheet, part number and price/delivery information.



Please click "Back", and then click "Contact Us" for Applications support.


CASE STYLE: 99-01-EDU2205-2

ELECTRICAL SPECIFICATIONS 50Ω @ +25°C

Parameter	Min.	Typ.	Max.	Units
Passband (Loss < 3 dB)	11200		11400	MHz
Centre frequency (Loss < 2 dB)		11300		MHz
Low Band (Loss > 60 dB)	DC	10940		MHz
Low Band (Loss > 20 dB)	10940	11120		MHz
High Band (Loss > 20 dB)		11490	11680	MHz
High Band (Loss > 60 dB)		11680	17000	MHz
Passband VSWR		1.5		(:1)
Stopband VSWR		19		(:1)

Functional Schematic

MAXIMUM RATINGS	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	10W

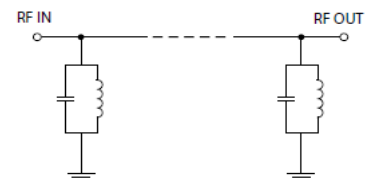

PIN CONNECTIONS

Input	SMA Female
Output	SMA Female

Band Pass Cavity Filter

ZVBP-EDU2205

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)	FREQUENCY (MHz)	GROUP DELAY (nsec)
100	82.90	0.03	11200	9.04
500	98.83	0.04	11205	8.44
1000	94.28	0.09	11210	7.98
10940	70.17	0.20	11215	7.64
11000	59.77	0.25	11220	7.37
11150	15.45	1.42	11230	6.93
11120	28.59	0.64	11240	6.58
11150	15.45	1.42	11250	6.33
11175	3.79	9.88	11260	6.18
11200	2.00	18.39	11270	6.07
11250	1.60	18.56	11280	5.98
11300	1.55	17.56	11290	5.90
11350	1.67	18.93	11300	5.84
11400	2.03	18.93	11310	5.83
11425	2.95	17.10	11320	5.86
11450	11.04	2.24	11330	5.93
11490	28.55	0.58	11340	5.99
11550	45.96	0.32	11350	6.07
11600	56.52	0.26	11360	6.20
11680	69.48	0.22	11370	6.43
12000	95.78	0.19	11380	6.75
15000	104.06	0.39	11390	7.15
17000	103.53	0.27	11395	7.38
20000	99.79	0.21	11400	7.64



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS




REV. X1
ZVBP-EDU2205
URJ
150909
Page 1 of 1

Band Pass Cavity Filter

Typical Performance Curves

ZVBP-EDU2205

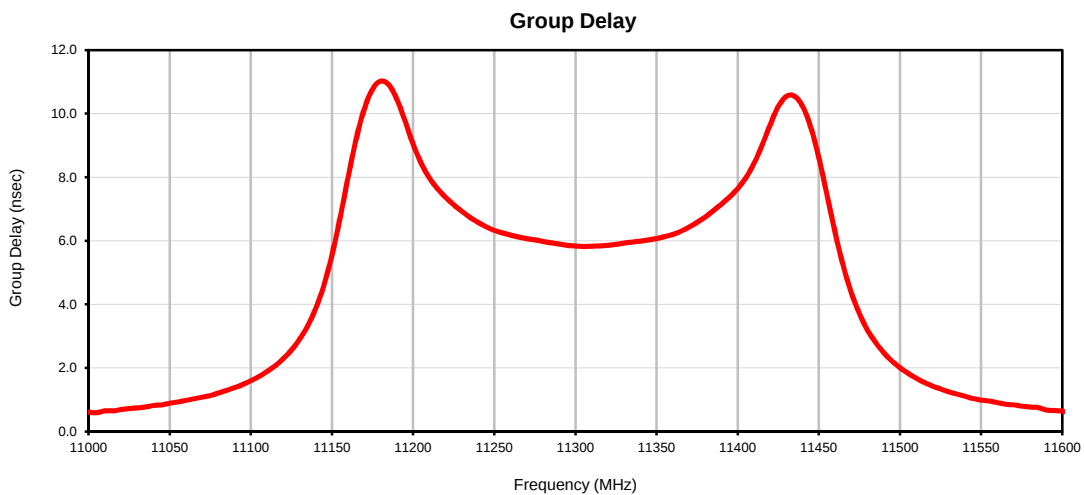

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. X1
ZVBP-EDU2205
URJ
150909
Page 1 of 1



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 40°C, 96 hours; Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103, Condition B
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11ms half-sine, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition A