SMA Connectorized

Power Splitter/Combiner

ZX10Q-2-12-S+

2 Way-90° 50Ω 800 to 1250 MHz

Generic photo used for illustration purposes only

CASE STYLE: GW1052

Connectors	Model
SMA	ZX10Q-2-12-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	20W* max.

* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

INPUT PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	3
50 OHM TERM EXTERNAL**	4

Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance
- very good phase unbalance
- small size
- low cost
- protected by U.S Patent 6,790,049

Applications

- cellular
- GSM
- balanced amplifiers
- modulators

***** Recommended external termination Mini-Circuits Part. No. ANNE-50L***

Outline Drawing

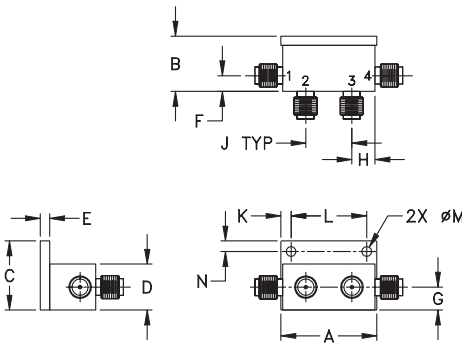

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
1.04	.60	.75	.50	.10	.17	.25
26.42	15.24	19.05	12.70	2.54	4.32	6.35
H	**J**	**K**	**L**	**M**	**N**	**wt.**
.25	.50	.11	.820	.106	.12	grams
6.35	12.70	2.79	20.83	2.69	3.05	21.0

Electrical Specifications (T_{AMB}=25°C)

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)	
f_L-f_U	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.
800-1250								
800-1000	17	15	0.3	0.6	2.5	5.0	0.2	0.8
1000-1250	16	13	0.4	0.7	2.5	5.0	0.5	0.8

Typical Performance Data

Frequency (MHz)	Total Loss[1] (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
800.00	3.13	3.59	0.46	16.94	87.58	1.27	1.20	1.11
825.00	3.20	3.51	0.31	16.91	87.64	1.27	1.20	1.10
850.00	3.27	3.44	0.18	16.86	87.73	1.27	1.19	1.10
875.00	3.33	3.38	0.05	16.82	87.82	1.27	1.18	1.09
925.00	3.44	3.28	0.16	16.72	87.99	1.27	1.16	1.08
950.00	3.48	3.24	0.25	16.66	88.10	1.27	1.15	1.07
975.00	3.52	3.20	0.32	16.59	88.21	1.27	1.14	1.07
1000.00	3.56	3.17	0.39	16.51	88.35	1.27	1.13	1.07
1050.00	3.61	3.14	0.48	16.31	88.65	1.27	1.10	1.07
1075.00	3.63	3.13	0.50	16.20	88.81	1.28	1.09	1.07
1100.00	3.65	3.13	0.52	16.08	88.98	1.28	1.07	1.07
1150.00	3.65	3.14	0.51	15.80	89.40	1.29	1.05	1.09
1175.00	3.65	3.16	0.49	15.64	89.65	1.29	1.03	1.10
1225.00	3.62	3.22	0.40	15.28	90.21	1.30	1.01	1.12
1250.00	3.60	3.26	0.34	15.08	90.53	1.31	1.03	1.14

1. Total Loss = Insertion Loss + 3dB splitter loss.

ZX10Q-2-12-S+
TOTAL LOSS

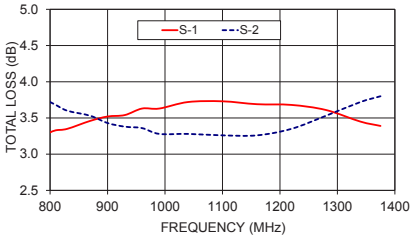

ZX10Q-2-12-S+
ISOLATION

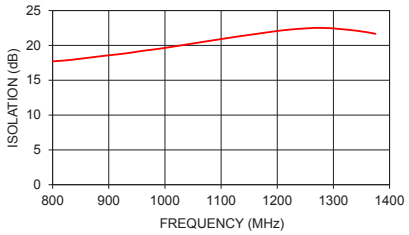

ZX10Q-2-12-S+
PHASE UNBALANCE

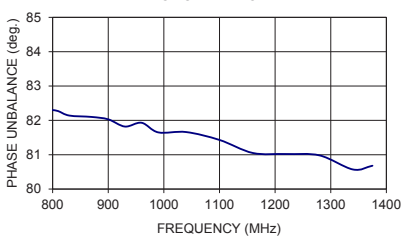

electrical schematic



Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

REV. G
M171494
ZX10Q-2-12-S+
AD/CP/AM
181218

Mini-Circuits®
www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

2 Way-90° Power Splitter/Combiner ZX10Q-2-12+

Typical Performance Data

FREQ. (MHz)	TOTAL LOSS[1] (dB) S-1	TOTAL LOSS[1] (dB) S-2	AMP. UNBAL. (dB)	ISOLATION (dB) 1-2	PHASE UNBAL. (deg.)
800.0	3.13	3.59	0.46	16.94	87.58
825.0	3.20	3.51	0.31	16.91	87.64
850.0	3.27	3.44	0.18	16.86	87.73
875.0	3.33	3.38	0.05	16.82	87.82
925.0	3.44	3.28	0.16	16.72	87.99
950.0	3.48	3.24	0.25	16.66	88.10
975.0	3.52	3.20	0.32	16.59	88.21
1000.0	3.56	3.17	0.39	16.51	88.35
1050.0	3.61	3.14	0.48	16.31	88.65
1075.0	3.63	3.13	0.50	16.20	88.81
1100.0	3.65	3.13	0.52	16.08	88.98
1150.0	3.65	3.14	0.51	15.80	89.40
1175.0	3.65	3.16	0.49	15.64	89.65
1225.0	3.62	3.22	0.40	15.28	90.21
1250.0	3.60	3.26	0.34	15.08	90.53

FREQ. (MHz)	VSWR (:1) S	VSWR (:1) 1	VSWR (:1) 2
800.0	1.27	1.20	1.11
825.0	1.27	1.20	1.10
850.0	1.27	1.19	1.10
875.0	1.27	1.18	1.09
925.0	1.27	1.16	1.08
950.0	1.27	1.15	1.07
975.0	1.27	1.14	1.07
1000.0	1.27	1.13	1.07
1050.0	1.27	1.10	1.07
1075.0	1.28	1.09	1.07
1100.0	1.28	1.07	1.07
1150.0	1.29	1.05	1.09
1175.0	1.29	1.03	1.10
1225.0	1.30	1.01	1.12
1250.0	1.31	1.03	1.14

[1] Total Loss = Insertion Loss + 3dB Splitter Loss

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

2 Way-90° Power Splitter/Combiner ZX10Q-2-12+

Typical Performance Curves

Total Loss

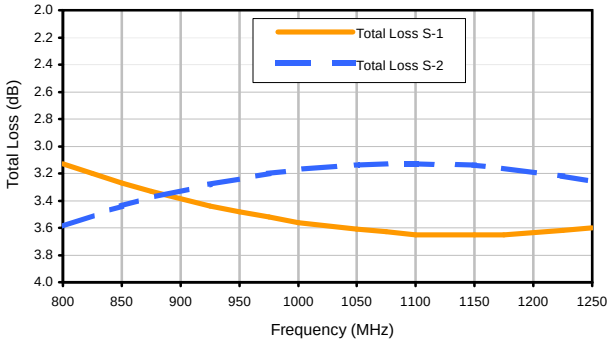

Isolation

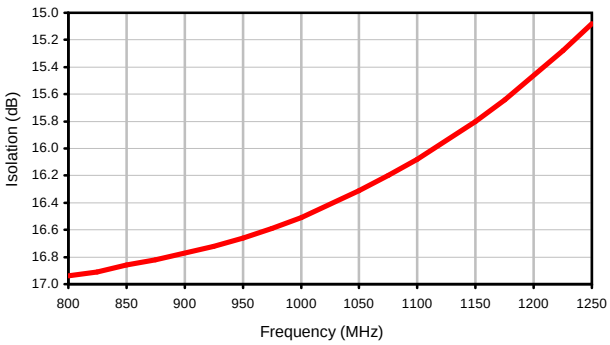

Amplitude Unbalance

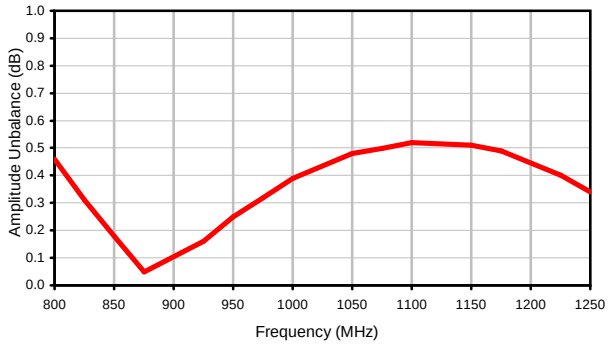

Phase Unbalance

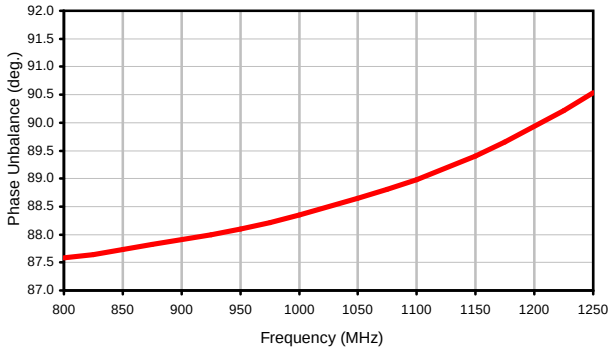

VSWR

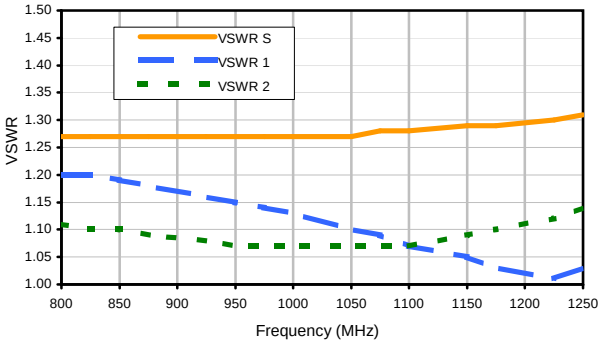

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com

Case Style GW

GW1052

Outline Dimensions

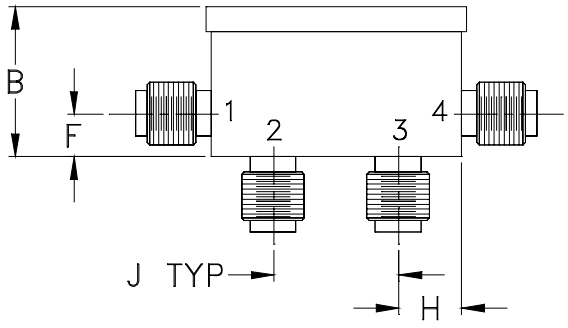

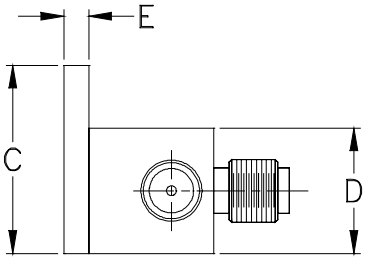

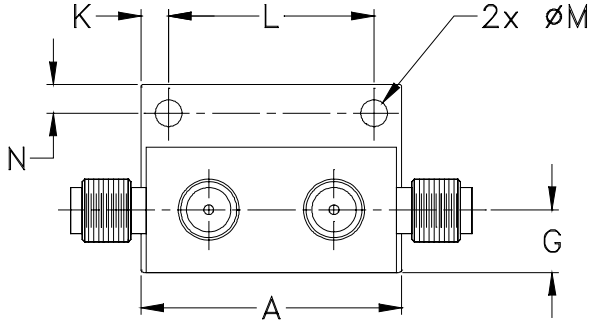

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	WT. GRAM
GW1052	1.04 (26.42)	.60 (15.24)	.75 (19.05)	.50 (12.70)	.10 (2.54)	.17 (4.32)	.25 (6.35)	.25 (6.35)	.50 (12.70)	.11 (2.79)	.820 (20.83)	.106 (2.69)	.12 (3.05)	21.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015.
Tolerance on hole size and interaxes dimensions to be ±.005.

Notes:

1. Case material: Brass.
2. Case finish: Nickel plate.

Mini-Circuits®
INTERNET http://www.minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010
Mini-Circuits ISO 9001 & ISO 14001 Certified

This document and its contents are the property of Mini-Circuits

Mini-Circuits

Environmental Specifications **ENV28T5**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I

This document and its contents are the property of Mini-Circuits.