

Coaxial

Voltage Controlled Oscillator

ZX95-2085+

5V Tuning for PLL IC's 2095 to 2115 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- protected by US patent 6,790,049

Applications

- r & d
- lab
- instrumentation
- wireless communications
- cellular infrastructure Internal IRAD



CASE STYLE: GB956

| Connectors | Model |
|------------|--------------|
| SMA | ZX95-2085-S+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | |
|------------|-------------|------|--------------------|---|------|------|------|--------|-------------------|----------------------|---------------|---------------------------------|-----------------------------|-----------------|------|-----------------------------|-----------------|--------------------|------|
| | Min. | Max. | | Typ. | 1 | 10 | 100 | 1000 | VOLTAGE RANGE (V) | SENSI-TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | | Typ. | Typ. | | | Typ. | Typ. |
| ZX95-2085+ | 2095 | 2115 | +4 | -81 | -106 | -126 | -146 | 0.5 | 5 | 30 | 35 | 60 | -90 | -20 | -10 | 3 | 0.3 | 5 | 35 |

Maximum Ratings


| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 6V |
| Absolute Max. Tuning Voltage (Vtune) | 7V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.



NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note AN-40-10.

Outline Drawing

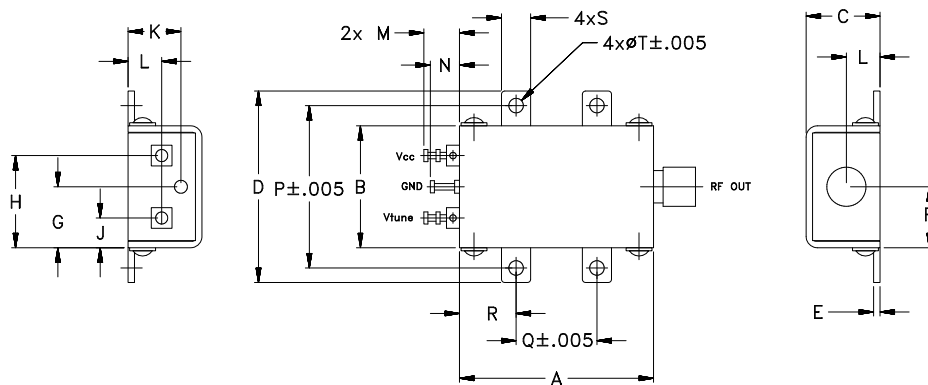

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp









www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Performance Data & Curves*

ZX95-2085+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 2105 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|--------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 37.01 | 2042.2 | 2039.1 | 2033.9 | 4.58 | 3.99 | 2.28 | 25.82 | -23.3 | -28.9 | -36.9 | 0.01 | 1.13 | -79.2 | -106.0 | -126.0 | -145.6 | 1.0 | -79.98 |
| 0.25 | 33.97 | 2050.9 | 2048.3 | 2043.6 | 4.60 | 3.99 | 2.26 | 25.81 | -23.2 | -29.0 | -36.1 | 0.08 | 2.60 | -80.7 | -105.5 | -126.1 | -145.9 | 2.0 | -90.08 |
| 0.50 | 32.31 | 2059.1 | 2056.8 | 2052.2 | 4.61 | 4.00 | 2.26 | 25.81 | -23.5 | -29.0 | -35.8 | 0.13 | 3.67 | -81.5 | -105.6 | -126.2 | -145.7 | 3.5 | -96.29 |
| 0.75 | 31.31 | 2067.0 | 2064.9 | 2060.4 | 4.61 | 4.00 | 2.26 | 25.81 | -23.8 | -29.1 | -36.0 | 0.16 | 4.22 | -82.0 | -105.4 | -125.8 | -146.5 | 6.0 | -101.14 |
| 1.00 | 30.58 | 2074.6 | 2072.7 | 2068.3 | 4.59 | 3.98 | 2.24 | 25.81 | -23.8 | -28.9 | -35.7 | 0.18 | 4.41 | -81.8 | -105.3 | -126.2 | -145.8 | 8.5 | -104.24 |
| 1.25 | 30.03 | 2082.1 | 2080.4 | 2075.9 | 4.59 | 3.98 | 2.20 | 25.81 | -23.8 | -28.7 | -35.1 | 0.20 | 4.39 | -81.8 | -105.3 | -125.7 | -146.2 | 10.0 | -105.56 |
| 1.50 | 29.74 | 2089.5 | 2087.9 | 2083.5 | 4.58 | 3.97 | 2.20 | 25.81 | -24.0 | -28.8 | -35.9 | 0.22 | 3.94 | -80.5 | -105.6 | -126.1 | -146.0 | 20.8 | -112.24 |
| 1.75 | 29.65 | 2096.8 | 2095.3 | 2090.9 | 4.55 | 3.93 | 2.17 | 25.81 | -24.0 | -28.7 | -35.2 | 0.22 | 3.11 | -81.6 | -106.5 | -126.0 | -146.0 | 35.5 | -117.02 |
| 2.00 | 29.59 | 2104.1 | 2102.7 | 2098.3 | 4.53 | 3.90 | 2.12 | 25.81 | -24.0 | -28.6 | -35.1 | 0.23 | 1.98 | -81.7 | -105.9 | -126.2 | -145.7 | 60.7 | -121.21 |
| 2.25 | 29.61 | 2111.4 | 2110.1 | 2105.7 | 4.51 | 3.88 | 2.08 | 25.81 | -24.2 | -28.4 | -35.3 | 0.24 | 0.82 | -80.0 | -105.4 | -126.2 | -146.0 | 86.7 | -124.80 |
| 2.50 | 29.69 | 2118.7 | 2117.5 | 2113.1 | 4.48 | 3.84 | 2.03 | 25.81 | -24.3 | -28.5 | -35.3 | 0.24 | 1.58 | -81.4 | -105.0 | -125.7 | -145.3 | 100.0 | -126.00 |
| 2.75 | 29.64 | 2126.0 | 2125.0 | 2120.5 | 4.44 | 3.80 | 1.99 | 25.81 | -24.3 | -28.6 | -34.6 | 0.25 | 2.83 | -78.3 | -105.7 | -125.9 | -145.8 | 148.1 | -129.46 |
| 3.00 | 29.60 | 2133.2 | 2132.4 | 2127.9 | 4.42 | 3.76 | 1.94 | 25.81 | -24.1 | -28.6 | -34.7 | 0.25 | 3.78 | -80.6 | -105.0 | -125.9 | -146.0 | 211.6 | -132.20 |
| 3.25 | 29.77 | 2140.6 | 2139.8 | 2135.3 | 4.40 | 3.72 | 1.90 | 25.81 | -24.1 | -28.8 | -34.9 | 0.25 | 4.35 | -79.9 | -106.3 | -125.8 | -146.5 | 302.4 | -135.47 |
| 3.50 | 29.93 | 2147.9 | 2147.2 | 2142.7 | 4.39 | 3.71 | 1.87 | 25.81 | -24.4 | -28.7 | -34.2 | 0.26 | 4.46 | -79.7 | -107.1 | -125.8 | -145.7 | 361.5 | -136.75 |
| 3.75 | 30.15 | 2155.3 | 2154.7 | 2150.1 | 4.37 | 3.68 | 1.85 | 25.81 | -24.5 | -28.5 | -34.0 | 0.28 | 4.31 | -78.7 | -105.7 | -126.2 | -146.1 | 432.2 | -138.41 |
| 3.90 | 30.27 | 2159.7 | 2159.2 | 2154.6 | 4.36 | 3.66 | 1.81 | 25.81 | -24.6 | -28.3 | -34.1 | 0.28 | 4.03 | -79.6 | -105.4 | -126.1 | -145.8 | 507.5 | -140.07 |
| 4.25 | 30.60 | 2170.2 | 2169.8 | 2165.2 | 4.36 | 3.65 | 1.76 | 25.80 | -24.7 | -28.3 | -34.0 | 0.28 | 3.00 | -81.3 | -105.0 | -126.1 | -145.9 | 606.7 | -141.59 |
| 4.50 | 30.70 | 2177.8 | 2177.5 | 2172.8 | 4.35 | 3.64 | 1.75 | 25.81 | -25.0 | -28.3 | -32.9 | 0.29 | 1.80 | -81.3 | -105.4 | -126.1 | -145.9 | 851.6 | -144.51 |
| 5.00 | 30.90 | 2192.9 | 2192.8 | 2188.1 | 4.30 | 3.59 | 1.68 | 25.81 | -24.9 | -28.2 | -33.7 | 0.29 | 2.14 | -77.3 | -106.8 | -126.0 | -145.8 | 1000.0 | -145.71 |

*at 25°C unless mentioned otherwise

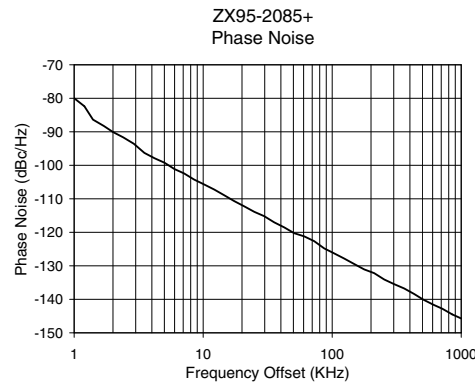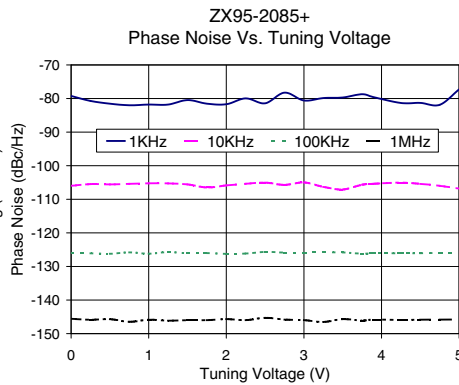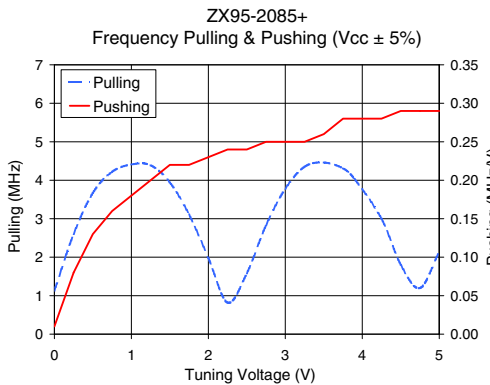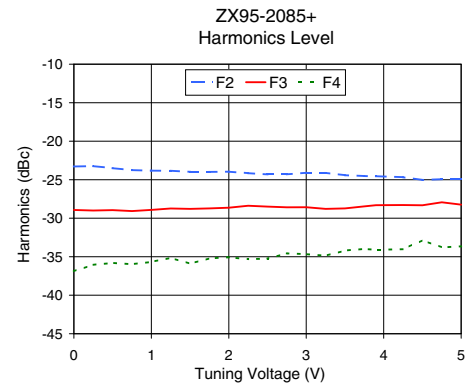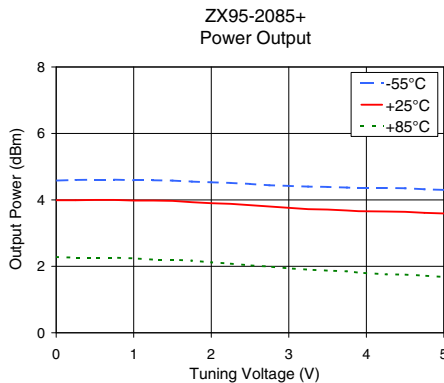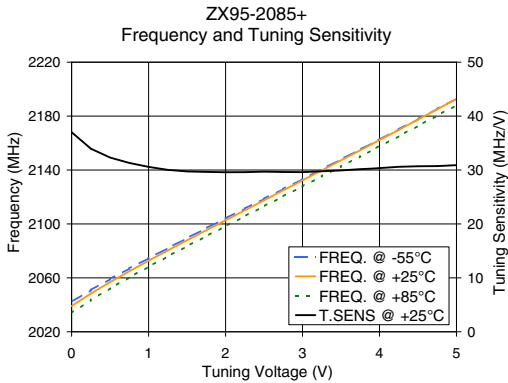

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Voltage Controlled Oscillator






ZX95-2085+

Typical Performance Data

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ OFFSET (KHz) | PHASE NOISE (dBc/Hz) |
|-----------|-------------------------|--------------------|--------|--------|-----------------------|-------|-------|-----------------|-------|-------|--------------------------|-------------------------|----------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | F2 | F3 | F4 | | | |
| 0.00 | 37.01 | 2042.2 | 2039.1 | 2033.9 | 4.58 | 3.99 | 2.28 | -23.3 | -28.9 | -36.9 | 0.01 | 1 | -80 |
| 0.25 | 33.97 | 2050.9 | 2048.3 | 2043.5 | 4.60 | 3.99 | 2.26 | -23.2 | -29.0 | -36.1 | 0.08 | 10 | -106 |
| 0.50 | 32.31 | 2059.1 | 2056.8 | 2052.2 | 4.61 | 4.00 | 2.26 | -23.5 | -29.0 | -35.8 | 0.13 | 100 | -126 |
| 0.75 | 31.31 | 2067.0 | 2064.9 | 2060.4 | 4.61 | 4.00 | 2.26 | -23.8 | -29.1 | -36.0 | 0.16 | 1000 | -146 |
| 1.00 | 30.58 | 2074.6 | 2072.7 | 2068.3 | 4.59 | 3.98 | 2.24 | -23.8 | -28.9 | -35.7 | 0.18 | | |
| 1.25 | 30.03 | 2082.1 | 2080.4 | 2075.9 | 4.59 | 3.98 | 2.20 | -23.8 | -28.7 | -35.1 | 0.20 | | |
| 1.50 | 29.74 | 2089.5 | 2087.9 | 2083.5 | 4.58 | 3.97 | 2.20 | -24.0 | -28.8 | -35.9 | 0.22 | | |
| 1.75 | 29.65 | 2096.8 | 2095.3 | 2090.9 | 4.55 | 3.93 | 2.17 | -24.0 | -28.7 | -35.2 | 0.22 | | |
| 2.00 | 29.59 | 2104.1 | 2102.7 | 2098.3 | 4.53 | 3.90 | 2.12 | -24.0 | -28.6 | -35.1 | 0.23 | | |
| 2.25 | 29.61 | 2111.4 | 2110.1 | 2105.7 | 4.51 | 3.88 | 2.08 | -24.2 | -28.4 | -35.3 | 0.24 | | |
| 2.50 | 29.69 | 2118.7 | 2117.5 | 2113.1 | 4.48 | 3.84 | 2.03 | -24.3 | -28.5 | -35.3 | 0.24 | | |
| 2.75 | 29.64 | 2126.0 | 2125.0 | 2120.5 | 4.44 | 3.80 | 1.99 | -24.3 | -28.6 | -34.6 | 0.25 | | |
| 3.00 | 29.60 | 2133.2 | 2132.4 | 2127.9 | 4.42 | 3.76 | 1.94 | -24.1 | -28.6 | -34.7 | 0.25 | | |
| 3.25 | 29.77 | 2140.6 | 2139.8 | 2135.3 | 4.40 | 3.72 | 1.90 | -24.1 | -28.8 | -34.9 | 0.25 | | |
| 3.50 | 29.93 | 2147.9 | 2147.2 | 2142.7 | 4.39 | 3.71 | 1.87 | -24.4 | -28.7 | -34.2 | 0.26 | | |
| 3.75 | 30.15 | 2155.3 | 2154.7 | 2150.1 | 4.37 | 3.68 | 1.85 | -24.5 | -28.5 | -34.0 | 0.28 | | |
| 3.90 | 30.27 | 2159.7 | 2159.2 | 2154.6 | 4.36 | 3.66 | 1.81 | -24.6 | -28.3 | -34.1 | 0.28 | | |
| 4.25 | 30.60 | 2170.2 | 2169.8 | 2165.2 | 4.36 | 3.65 | 1.76 | -24.7 | -28.3 | -34.0 | 0.28 | | |
| 4.50 | 30.70 | 2177.8 | 2177.5 | 2172.8 | 4.35 | 3.64 | 1.75 | -25.0 | -28.3 | -32.9 | 0.29 | | |
| 4.75 | 30.73 | 2185.3 | 2185.1 | 2180.4 | 4.32 | 3.61 | 1.72 | -24.9 | -27.9 | -33.8 | 0.29 | | |
| 5.00 | 30.90 | 2192.9 | 2192.8 | 2188.1 | 4.30 | 3.59 | 1.68 | -24.9 | -28.2 | -33.7 | 0.29 | | |
| 5.25 | 30.86 | 2200.5 | 2200.6 | 2195.8 | 4.30 | 3.58 | 1.66 | -25.2 | -28.4 | -32.7 | 0.29 | | |
| 5.50 | 30.92 | 2208.2 | 2208.3 | 2203.5 | 4.29 | 3.56 | 1.64 | -25.3 | -28.2 | -33.8 | 0.29 | | |
| 5.75 | 31.09 | 2215.8 | 2216.0 | 2211.2 | 4.27 | 3.54 | 1.62 | -25.4 | -27.9 | -33.0 | 0.28 | | |
| 6.00 | 31.21 | 2223.5 | 2223.8 | 2218.9 | 4.26 | 3.52 | 1.59 | -25.8 | -27.7 | -33.3 | 0.29 | | |
| 6.25 | 31.21 | 2231.2 | 2231.6 | 2226.7 | 4.25 | 3.51 | 1.57 | -26.1 | -27.8 | -32.8 | 0.29 | | |
| 6.50 | 31.12 | 2238.9 | 2239.4 | 2234.5 | 4.24 | 3.49 | 1.55 | -26.1 | -28.0 | -33.2 | 0.29 | | |
| 6.75 | 31.24 | 2246.6 | 2247.2 | 2242.2 | 4.21 | 3.44 | 1.51 | -26.0 | -28.3 | -33.4 | 0.29 | | |
| 7.00 | 31.24 | 2254.3 | 2255.0 | 2250.0 | 4.20 | 3.42 | 1.45 | -26.4 | -28.5 | -32.6 | 0.30 | | |



Typical Performance Data

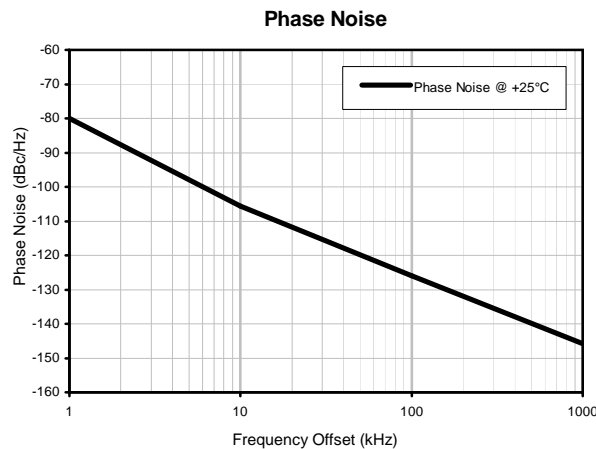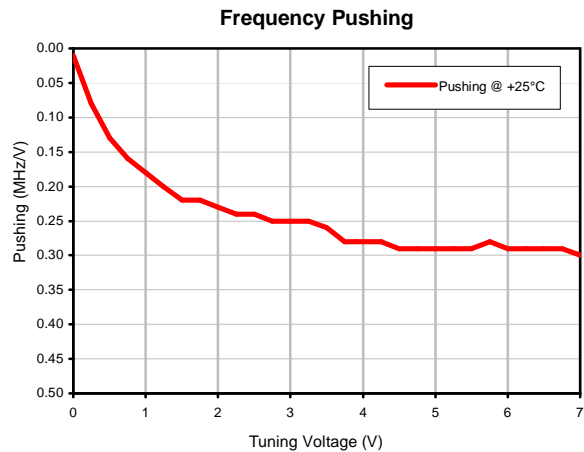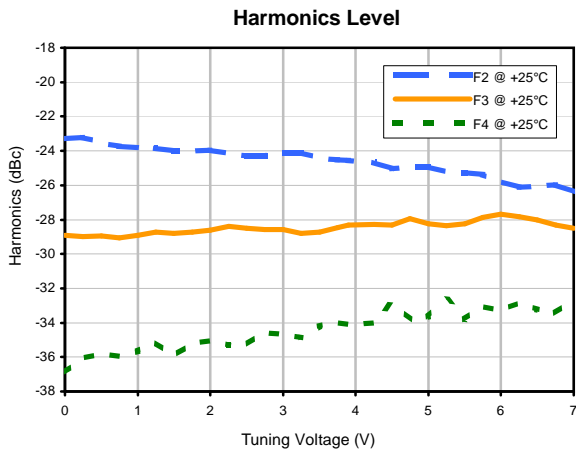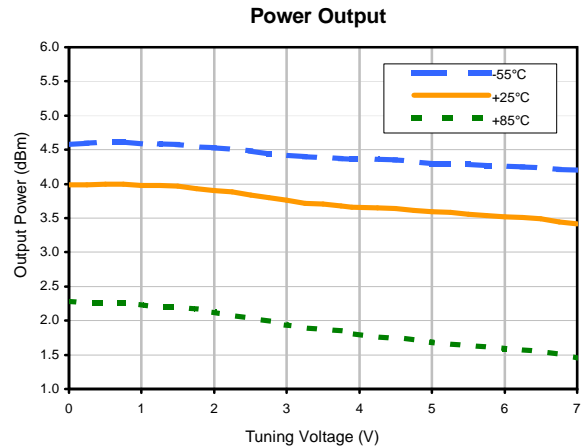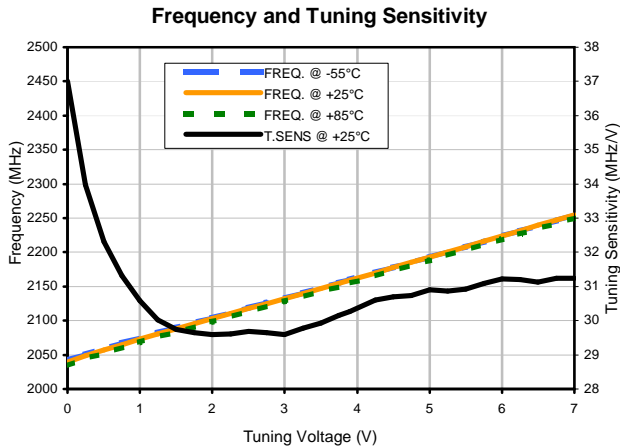


Case Style

GB

Outline Dimensions

GB956

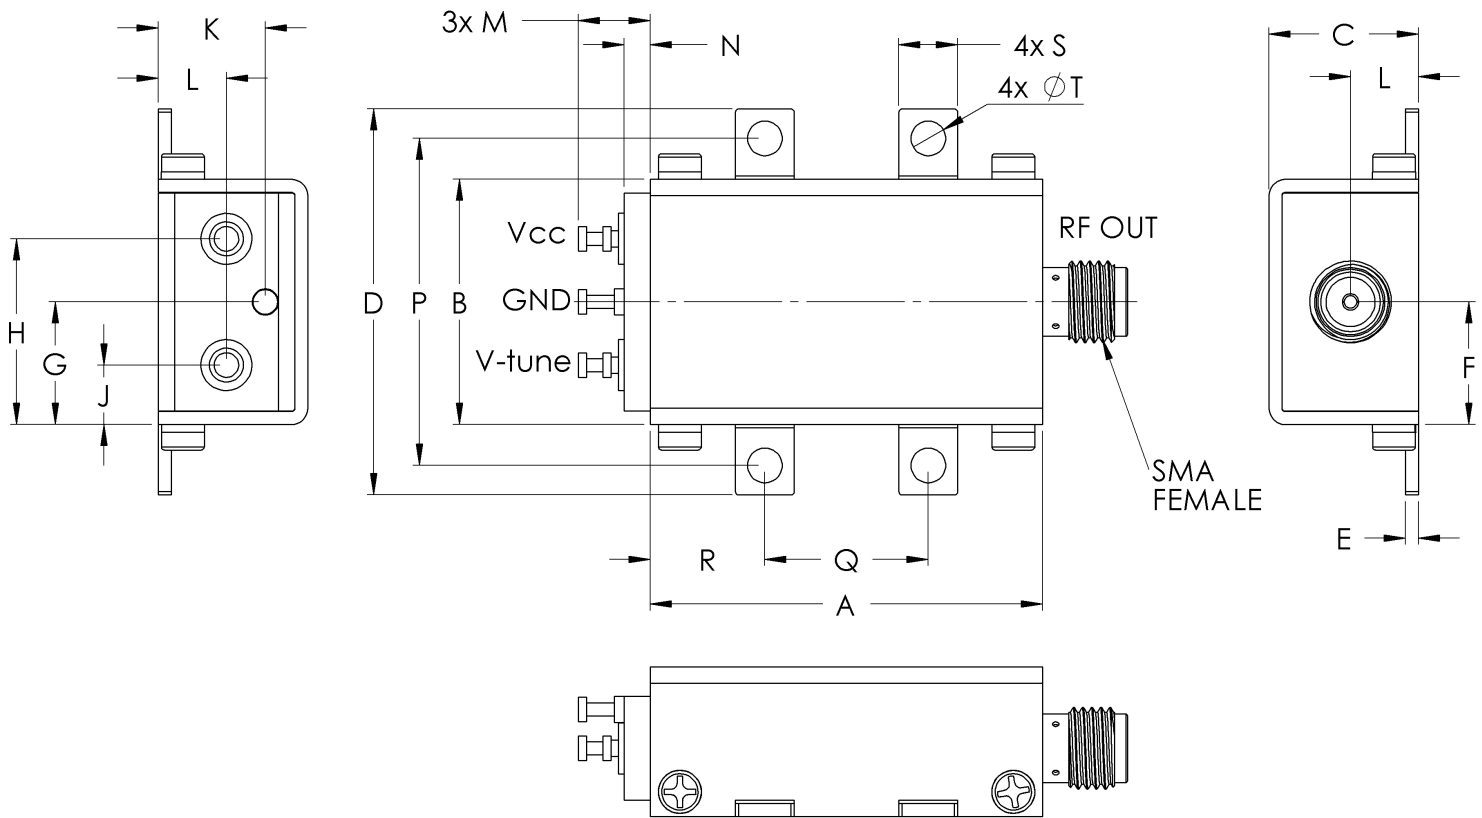

| CASE #. | A | B | C | D | E | F | G | H | J | K | L | M | N |
|---------|-----------------|----------------|----------------|-----------------|---------------|---------------|---------------|----------------|---------------|---------------|---------------|---------------|---------------|
| GB956 | 1.20 (30.48) | .75 (19.15) | .46 (11.61) | 1.18 (30.07) | .04 (1.02) | .38 (9.53) | .38 (9.53) | .57 (14.43) | .18 (4.62) | .33 (8.31) | .21 (5.28) | .22 (5.59) | .08 (2.03) |

| CASE #. | P | Q | R | S | T | WT GRAMS |
|---------|----------------|---------------|---------------|---------------|----------------|----------|
| GB956 | 1.00 (25.4) | .50 (12.7) | .35 (8.89) | .18 (4.57) | .106 (2.69) | 35 |

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$
Tolerance on hole size and interaxes dimensions to be $\pm .005$.

Note:

1. Case material: Brass
2. Case finish: Nickel plate

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|----------------------------|--|--------------------------------------|
| Operating Temperature | -55° to 85°C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -55° to 100° C Ambient Environment | Individual Model Data Sheet |
| Barometric Pressure | 100,000 Feet | MIL-STD-202, Method 105, Condition D |
| Humidity | 90% RH, 65°C Units may require bake-out after humidity to restore full performance. | MIL-STD-202, Method 103 |
| Thermal Shock | -65° to 125°C, 5 cycles | MIL-STD-202, Method 107, Condition B |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D |
| Mechanical Shock | 100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18) | MIL-STD-202, Method 213, Condition I |