Case Style HP

Outline Dimensions HP1156

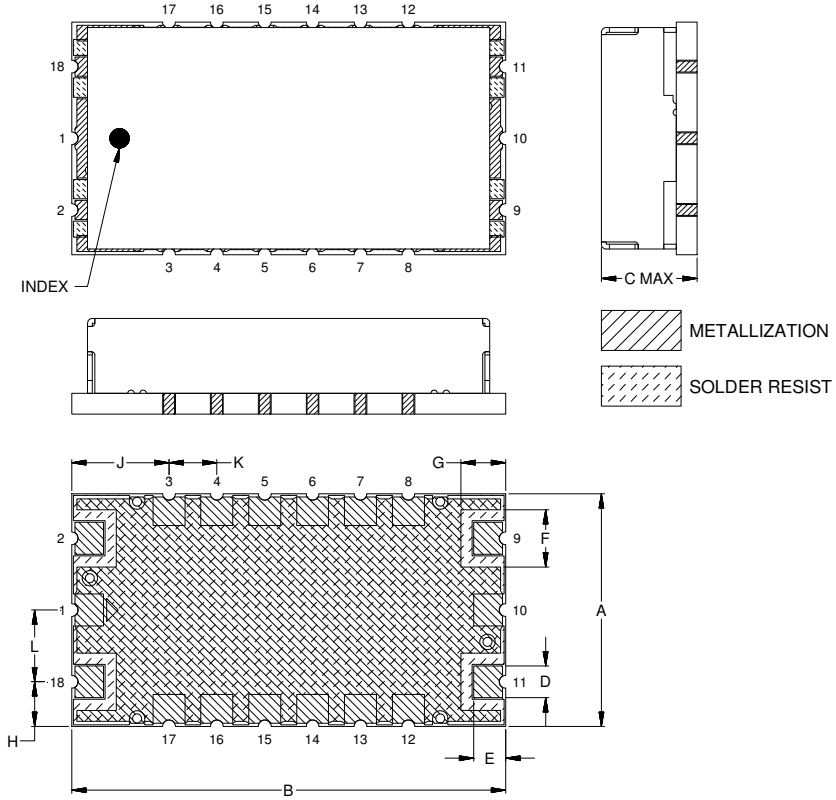

PCB Land Pattern

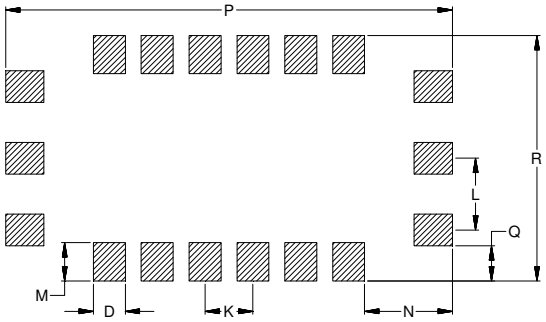

Suggested Layout,
Tolweance to be within ±.002

CASE#	A	B	C	D	E	F	G	H	J	K	L	M
HP1156	.730 (18.54)	1.360 (34.54)	.350 (8.89)	.100 (2.54)	.100 (2.54)	.180 (4.57)	.140 (3.56)	.140 (3.56)	.305 (7.75)	.150 (3.81)	.225 (5.72)	.120 (3.05)

CASE#	N	P	Q	R	WT.GRAM
HP1156	.275 (6.99)	1.400 (35.56)	.110 (2.79)	.770 (19.56)	6.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

Notes:

1. Case material: Nickel-Silver alloy.
2. Base: Printed wiring laminate.
3. Termination finish:
   For RoHS Case Styles: 3-5µinch (.08-.13microns) Gold over 120-240µinch (3.05-6.10microns) Nickel plate.
   For RoHS-5 Case Styles: Tin-Lead plate.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED
ALL NEW minicircuits.com
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com
RF/IF MICROWAVE COMPONENTS

This document and its contents are the property of Mini-Circuits.