



# Case Style

# KK


## Outline Dimensions

KK81  
KK265

NOTE: PIN NUMBERS DO NOT APPEAR ON UNIT, FOR REFERENCE ONLY INDEX MARK INDICATES PIN 6.

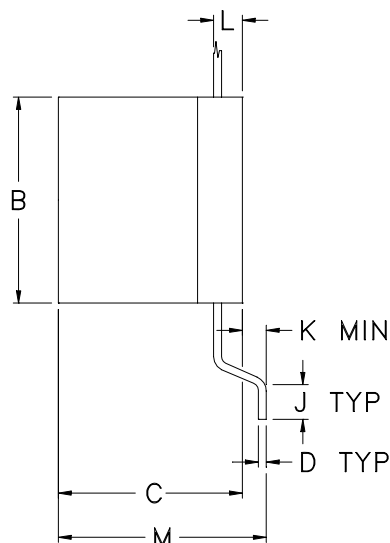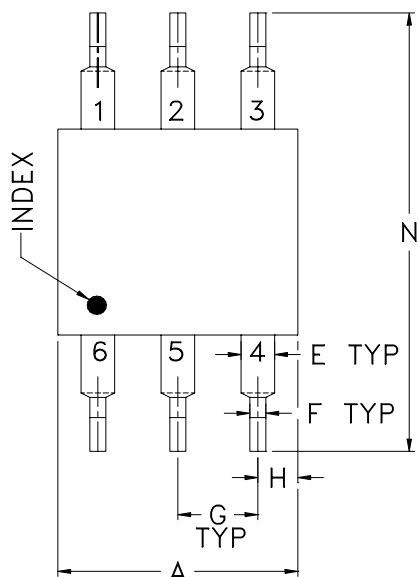

## PCB Land Pattern

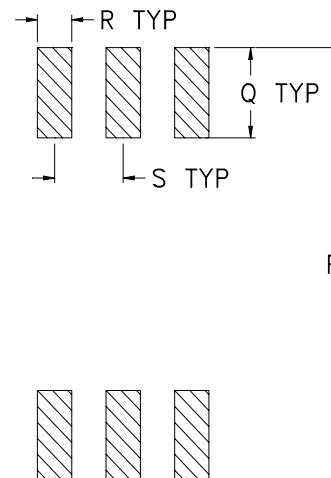

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M	N	P
KK81	.30 (7.62)	.27 (6.86)	.23 (5.84)	.010 (0.25)	0.42 (1.07)	.020 (0.51)	.100 (2.54)	.05 (1.27)	.05 (1.27)	.020 (0.51)	.036 (0.91)	.26 (6.60)	.575 (14.61)	.600 (15.24)
KK265	.30 (7.62)	.27 (6.86)	.22 (5.84)	.010 (0.25)	.020 (0.50)	.020 (0.51)	.100 (2.54)	.05 (1.27)	.05 (1.27)	0.1 (2.54)	.032 (0.81)	.23 (5.84)	.450 (10.62)	.475 (12.07)

CASE #	Q	R	S	WT. GRAM
KK81	.125 (3.18)	.050 (1.27)	.100 (2.54)	.50
KK265	.125 (3.18)	.050 (1.27)	.100 (2.54)	.65

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$ ; 3 Pl.  $\pm .015$

### Notes:

- Case material: Plastic.
- Termination finish:  
For RoHS Case Styles: Tin plate over Nickel plate.  
For RoHS-5 Case Styles: Tin-Lead plate.
- Special Tolerances: Termination width  $\pm .005$  inch, termination thickness  $\pm .003$  inch.

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified