
# Case Style

## **Outline Dimensions**

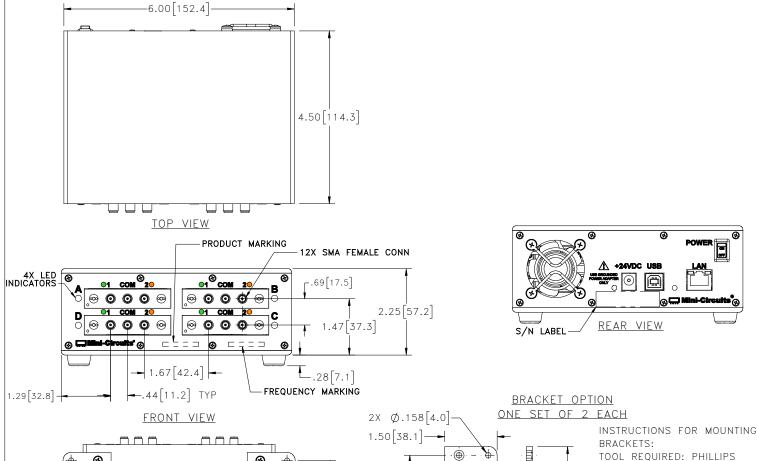

⊛ ⊕ 3.500 [88.9] 3.500 [88.9] .25[6.4] 6.75[171.5]

HEAD SCREWDRIVER STEP 1: REMOVE RUBBER FEET FROM THE BOTTOM OF THE UNIT, DO NOT DISCARD THE

4.00 [101.6]

TOLERANCE: ±.005

STEP 2: MOUNT THE BRACKETS WITH THE FASTENERS REMOVED IN STEP 1, USING THE COUNTER BORE HOLES IN THE

FASTENERS.

BRACKET.

BOTTOM VIEW SHOWN WITH RUBBER FEET REMOVED AND BRACKETS INSTALLED.

### Notes:

- Case material: Aluminum (with protective coating to prevent corrosion).
- Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.03 inch; 3 Pl. ±.015 inch.
- Weight: 1184 grams.
- Marking may contain other features or characters for internal lot control.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

LM1851 Rev: N (11/02/24) ECO-023237 File: LM1851

Sheet 1 OF 1