
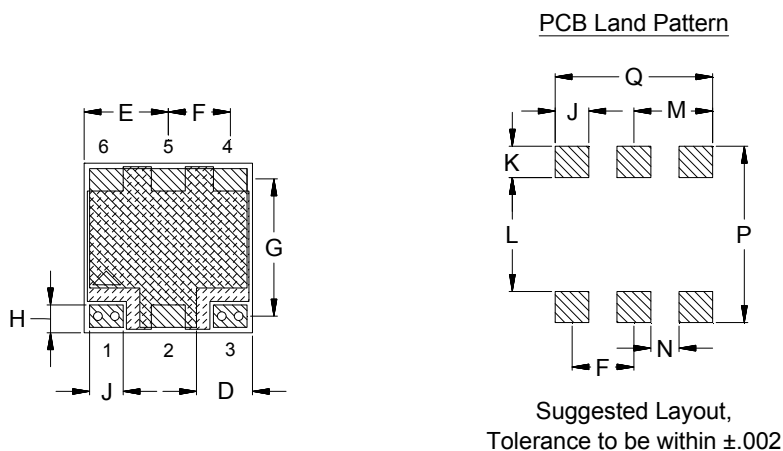


## Outline Dimensions

QA2224

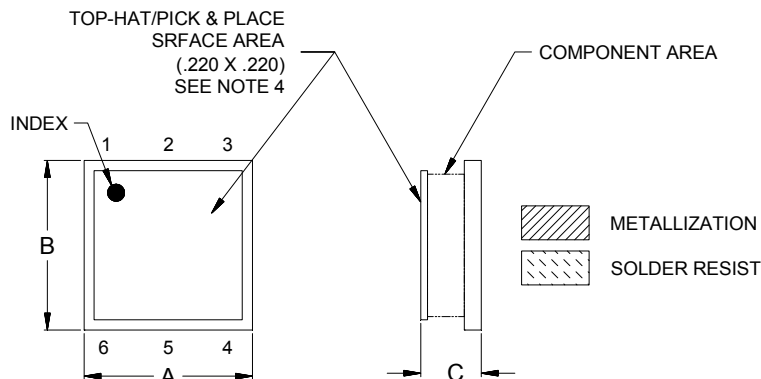

CASE#	A	B	C		D	E	F	G	H	J	K	L	M
			MIN	MAX									
QA2224	.250 (6.35)	.250 (6.35)	.075 (1.91)	.100 (2.54)	.075 (1.91)	.125 (3.18)	.092 (2.34)	.201 (5.11)	.041 (1.04)	.050 (1.27)	.046 (1.17)	.168 (4.27)	.117 (2.97)

CASE#	N	P	Q	WT. GRAM
QA2224	.042 (1.07)	.260 (6.60)	.234 (5.94)	0.25

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

### Notes:

- Case material: Ceramic base.
- Base: Printed wiring laminate.
- Termination finish:  
For RoHS Case Styles: 3-5  $\mu$  inch Gold over 120-240  $\mu$  inch Nickel plate.  
For RoHS-5 Case Styles: Tin-Lead plate.
- Top-Hat total thickness: .013 inches MAX



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS