



Outline Dimensions



TT1618

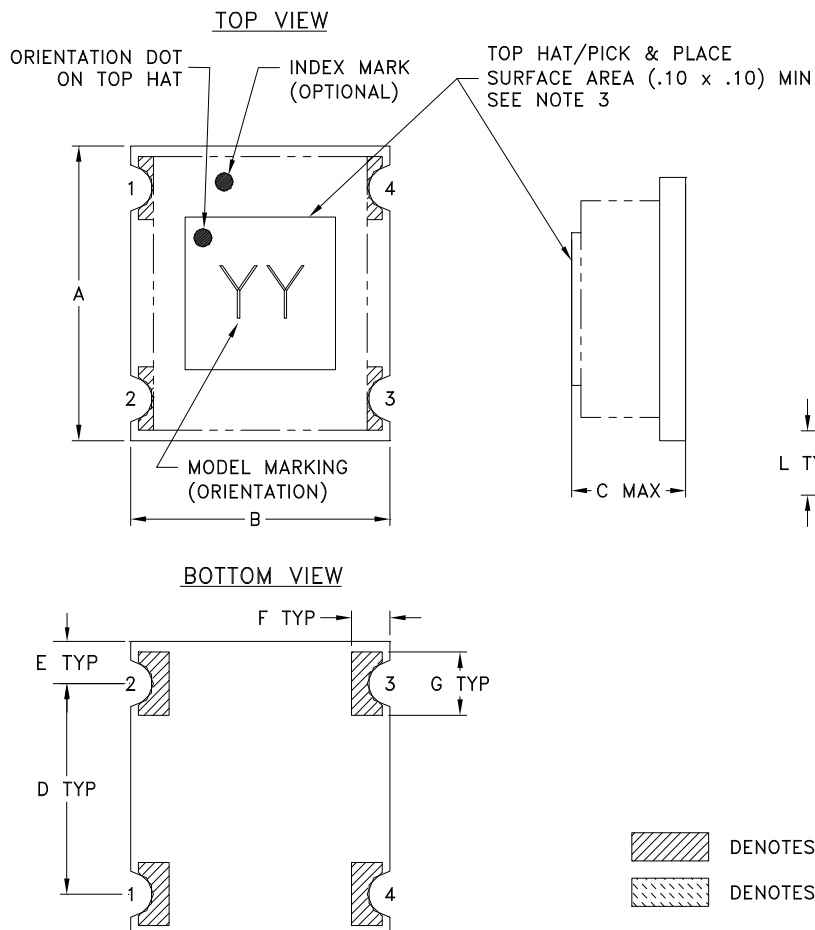

PCB Land Pattern

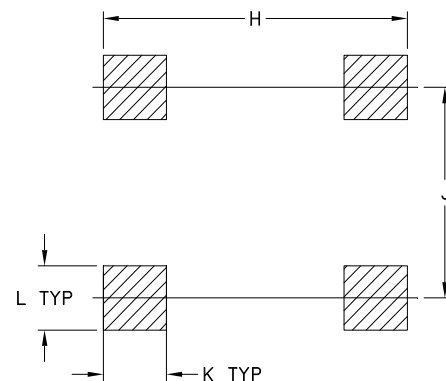

SUGGESTED LAYOUT
TOLERANCE TO BE WITHIN ± 0.02

 DENOTES METALLIZATION
 DENOTES SOLDER RESIST

CASE #	A	B	C	D	E	F	G	H	J	K	L	WT GRAMS
TT1618	.280 (7.11)	.250 (6.35)	.12 (3.05)	.200 (5.08)	.040 (1.02)	.037 (.94)	.060 (1.52)	.293 (7.44)	.200 (5.08)	.061 (1.55)	.061 (1.55)	2.80

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Open style, Base material: Printed wiring laminate.
2. Termination finish: 3-5 μ inch (.08-.13 microns) Gold over 120-240 μ inch (3.05-6.10 microns) Nickel plate.
All models, (+) suffix.
3. Top-Hat total thickness: .013 inches MAX.
4. Orientation Dot on Top Hat & PCB corresponds to Pin #1.


ISO 9001 ISO 14001 CERTIFIED

ALL NEW


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS