
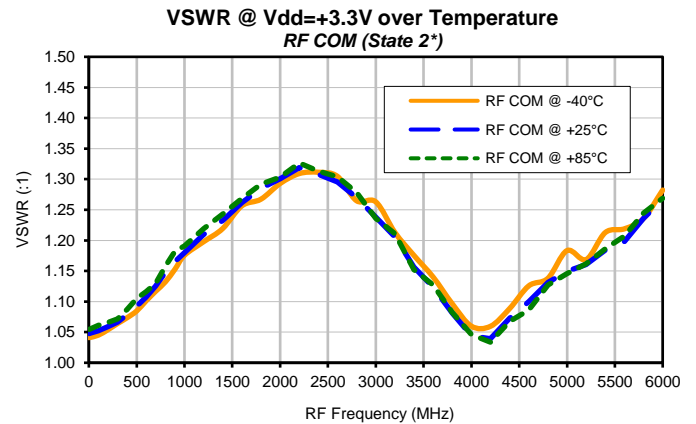
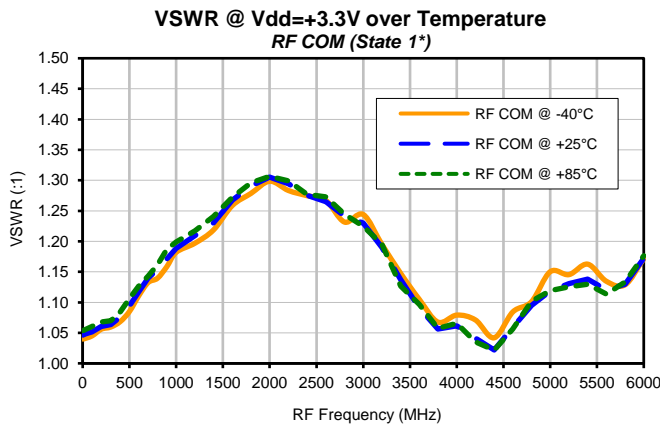
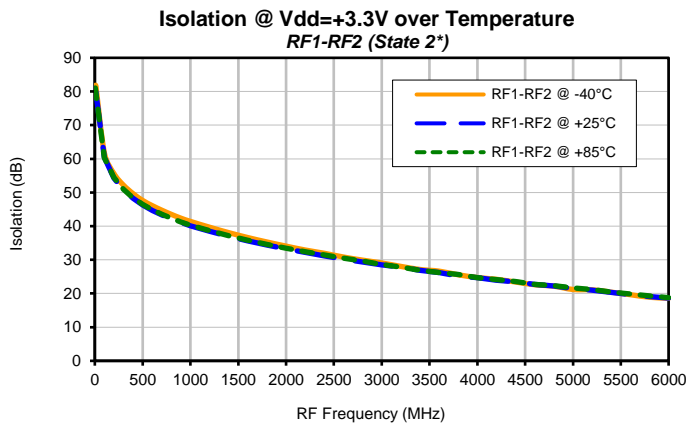
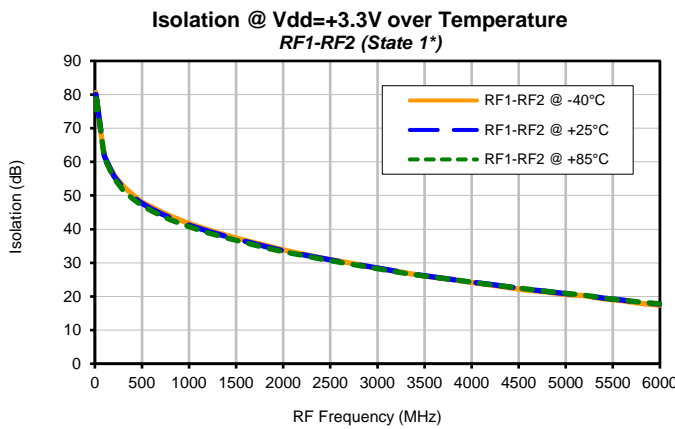
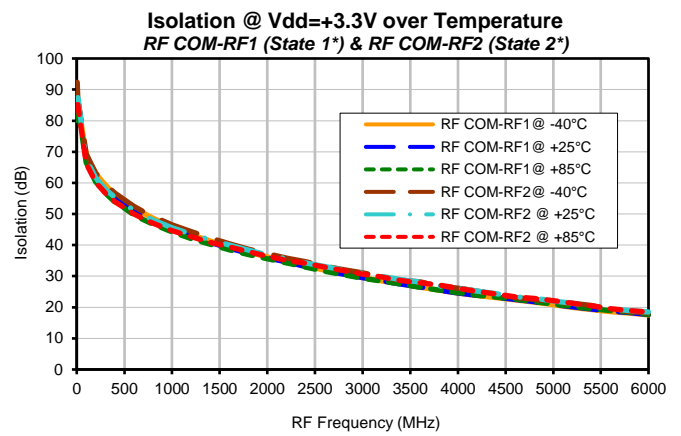


Typical Performance Curves

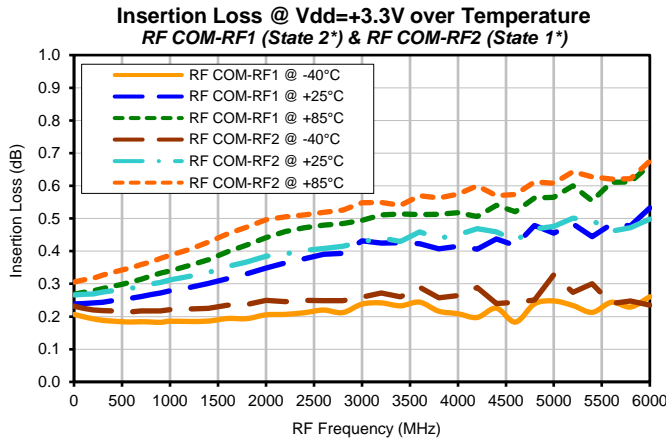


*Note:


STATE	CONTROL INPUT	RF Com to RF1	RF Com to RF2
1	High	OFF	ON
2	Low	ON	OFF

Typical Performance Curves


VSWR @ Vdd=+3.3V over Temperature
RF1 (State 2*)

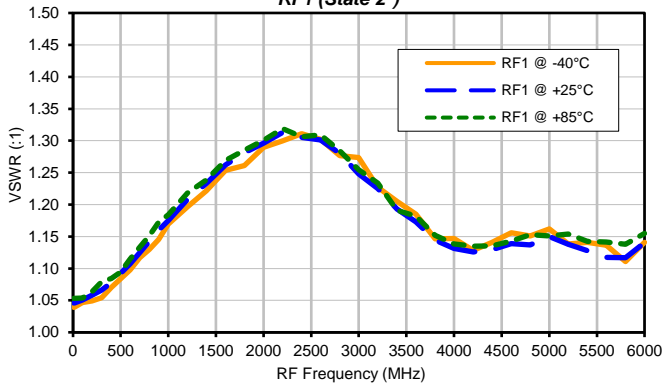


VSWR @ Vdd=+3.3V over Temperature
RF1 (State 1*)

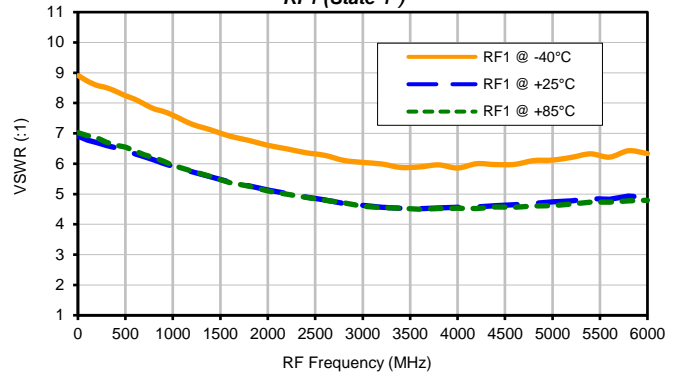

VSWR @ Vdd=+3.3V over Temperature
RF2 (State 1*)

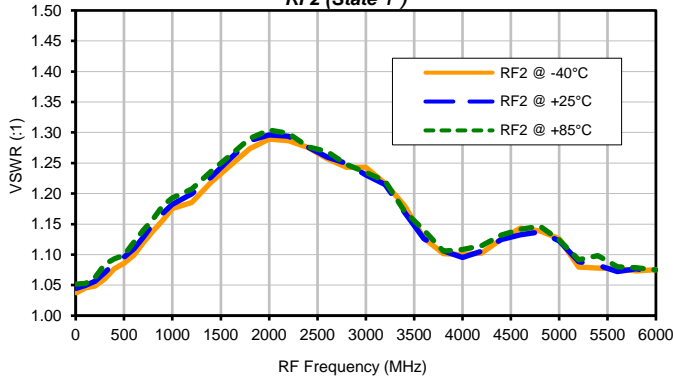

VSWR @ Vdd=+3.3V over Temperature
RF2 (State 2*)

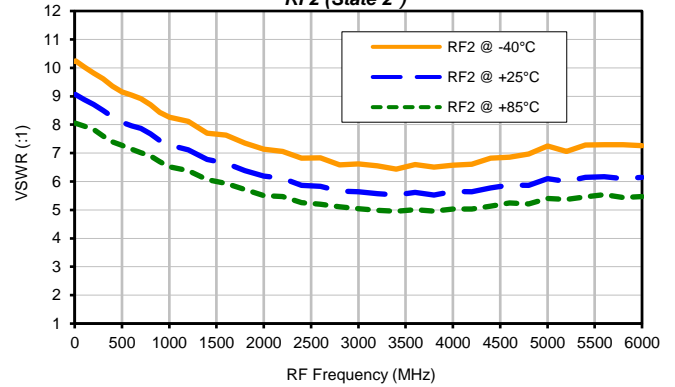

*Note:

STATE	CONTROL INPUT	RF Com to RF1	RF Com to RF2
1	High	OFF	ON
2	Low	ON	OFF