Typical Performance Curves

Insertion Loss @ 20 mA

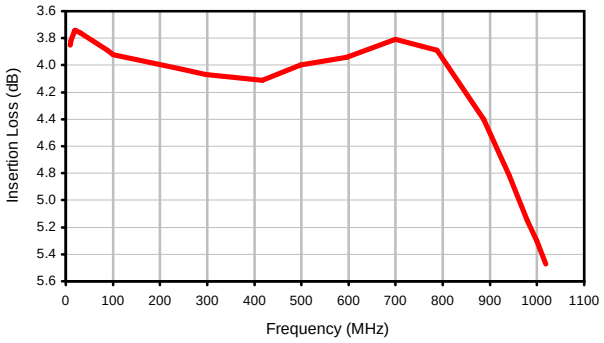

Amplitude Unbalance @ ± 20mA

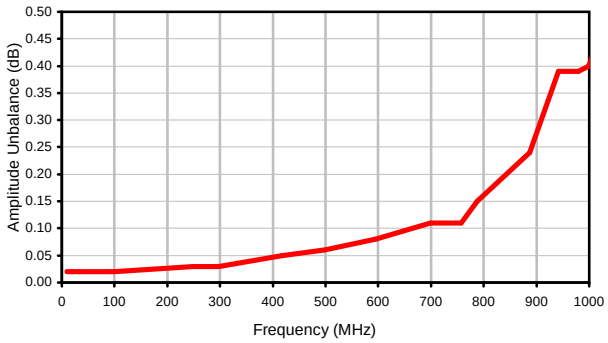

Phase Unbalance @ ± 20mA

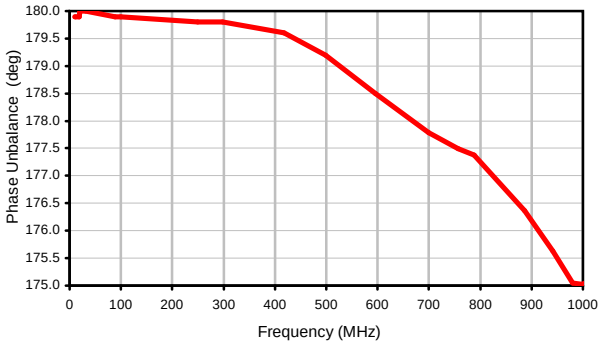

Isolation @ 0 mA

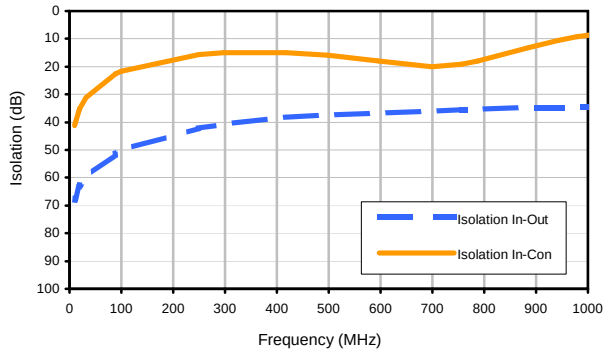

Return Loss Input

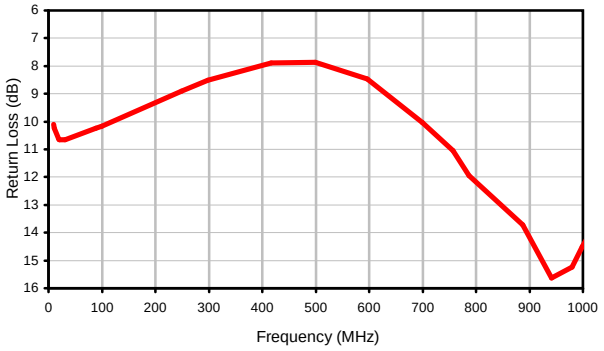

Attenuation

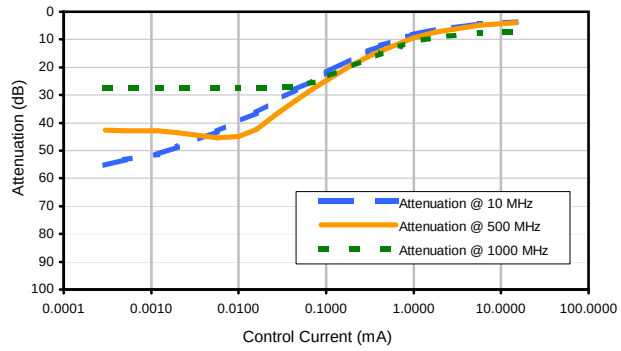

Phase Unbalance ref @ 15 mA

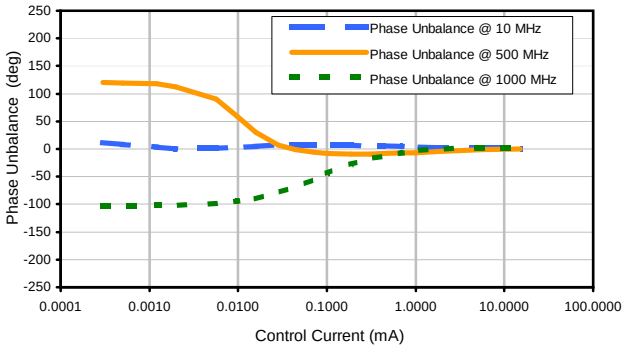

Input VSWR

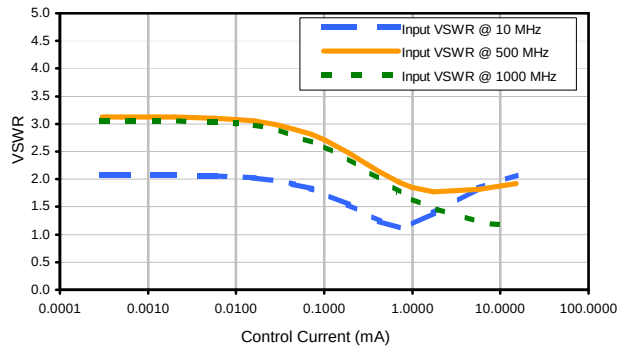

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
YONI2 Patent Pending The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com