



## Typical Performance Curves


### GAIN vs. TEMPERATURE

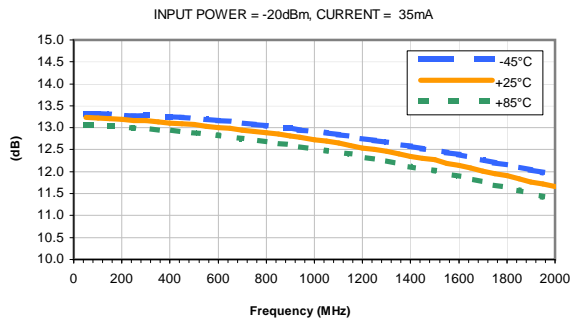


### GAIN vs. CURRENT

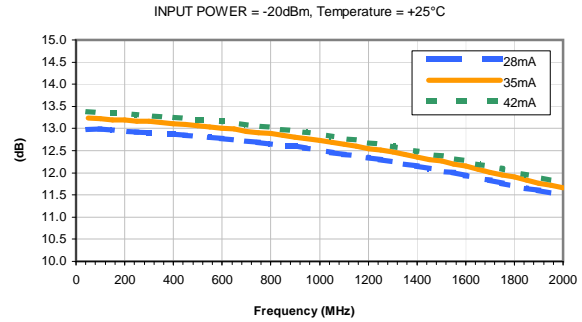


### ISOLATION vs. TEMPERATURE

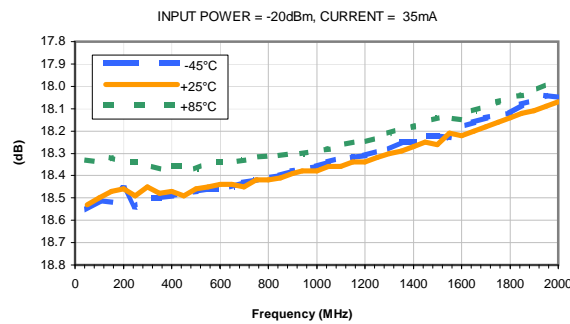


### ISOLATION vs. CURRENT

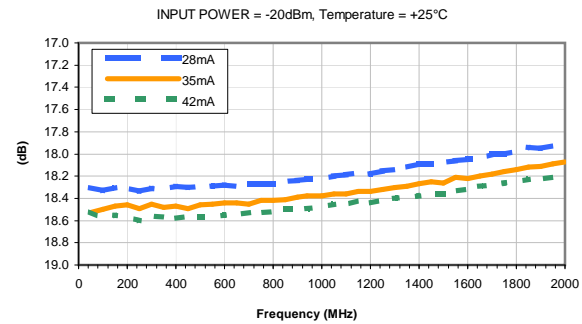


### INPUT RETURN LOSS vs. TEMPERATURE

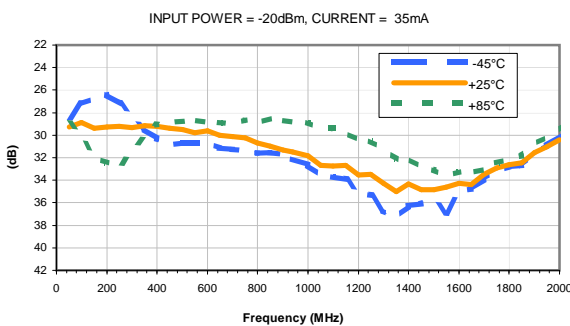


### INPUT RETURN LOSS vs. CURRENT

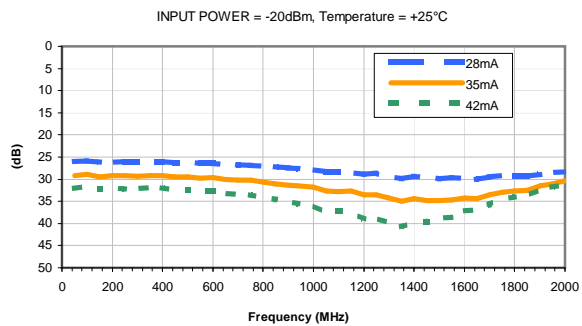

### OUTPUT RETURN LOSS vs. TEMPERATURE

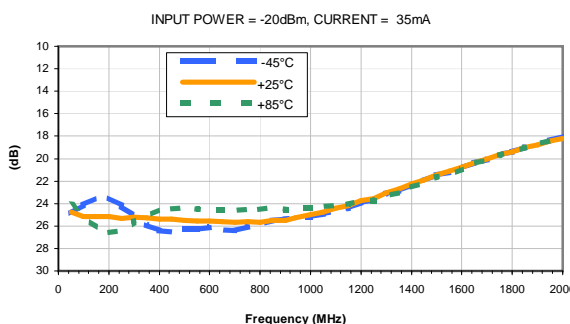


### OUTPUT RETURN LOSS vs. CURRENT

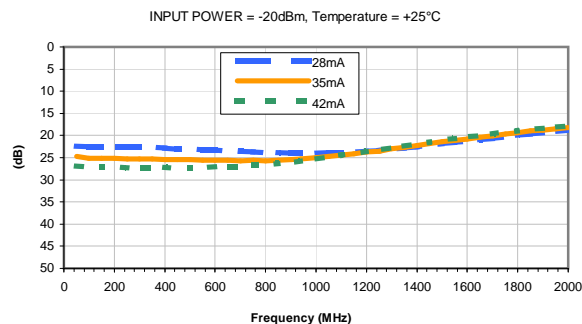

## Typical Performance Curves


**OUTPUT IP3 vs. TEMPERATURE**

INPUT POWER = -20dBm, CURRENT = 35mA

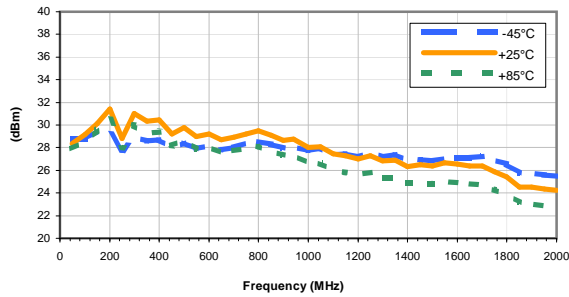


**OUTPUT IP-3 vs. CURRENT**

INPUT POWER = -20dBm, Temperature = +25°C

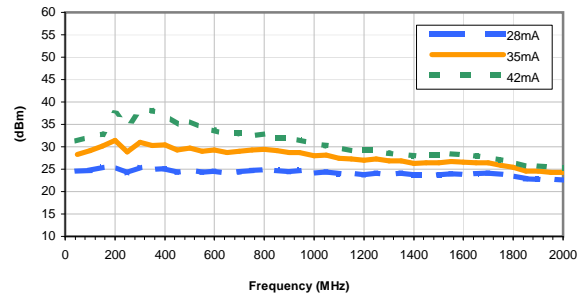


**OUTPUT POWER at 1dB Compression vs. TEMPERATURE**

CURRENT = 35mA

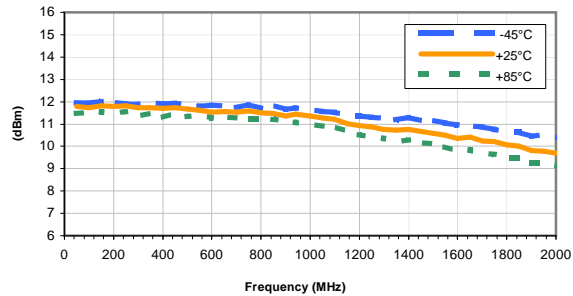


**OUTPUT POWER at 1dB Compression vs. CURRENT**

Temperature = +25°C

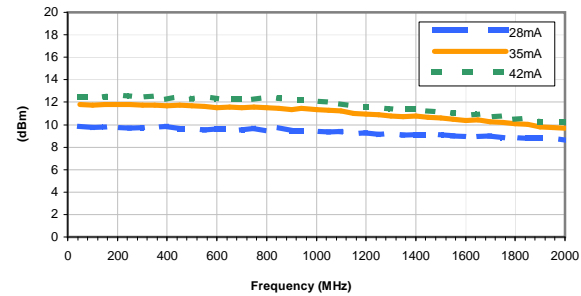

**Noise Figure vs. TEMPERATURE**

CURRENT = 35mA

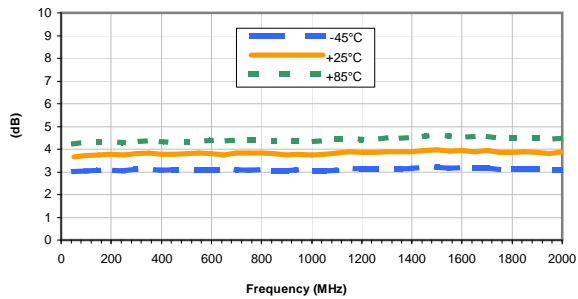

**Noise Figure vs. CURRENT**

Temperature = +25°C

