



Typical Performance Curves


GAIN vs. TEMPERATURE

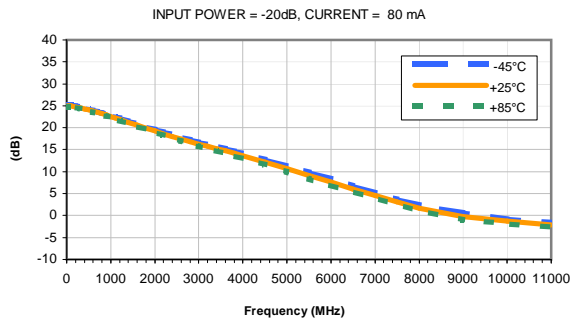


GAIN vs. CURRENT

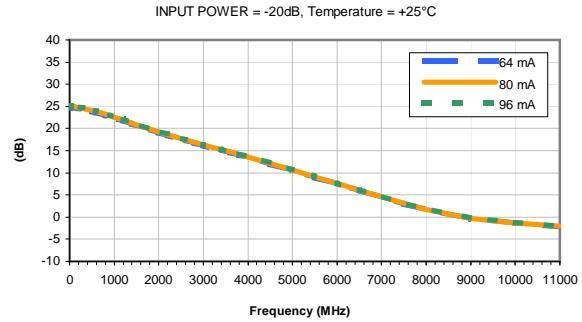


ISOLATION vs. TEMPERATURE

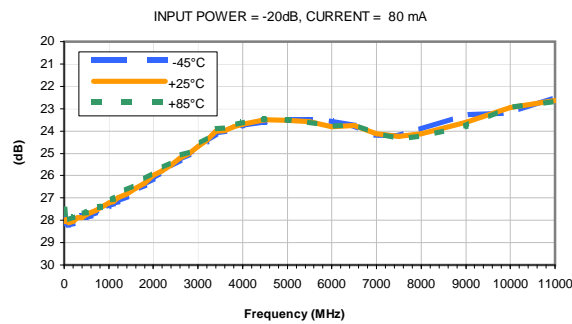


ISOLATION vs. CURRENT

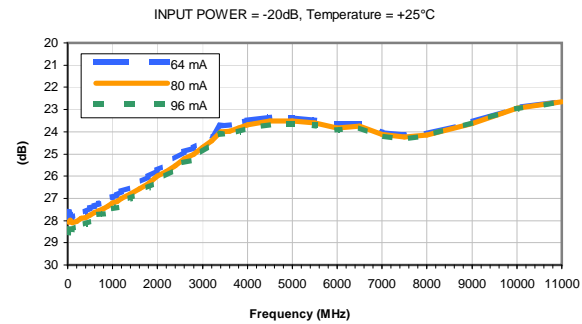


INPUT RETURN LOSS vs. TEMPERATURE

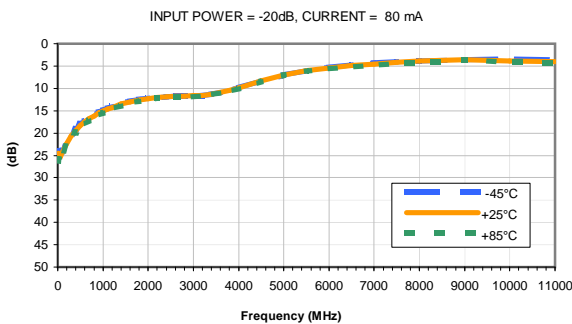


INPUT RETURN LOSS vs. CURRENT

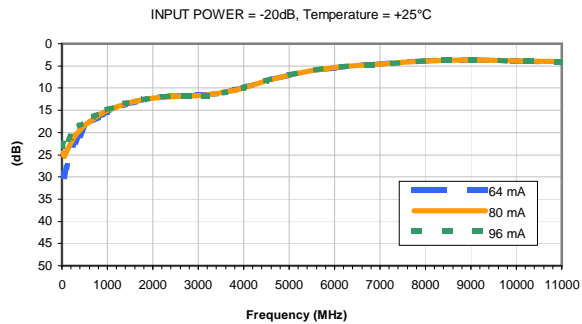

OUTPUT RETURN LOSS vs. TEMPERATURE

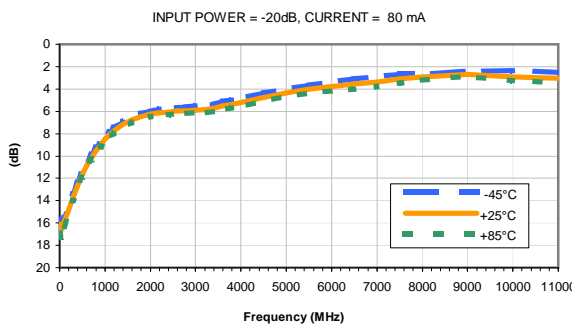


OUTPUT RETURN LOSS vs. CURRENT

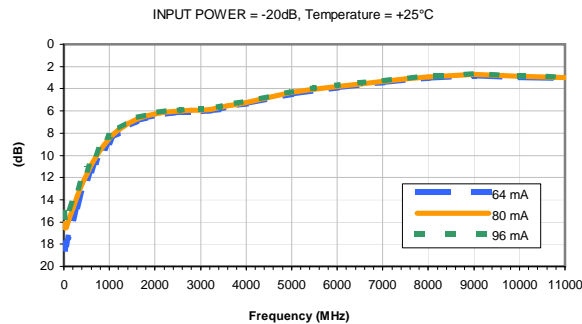

Typical Performance Curves


OUTPUT IP3 vs. TEMPERATURE

INPUT POWER = -20dB, CURRENT = 80 mA

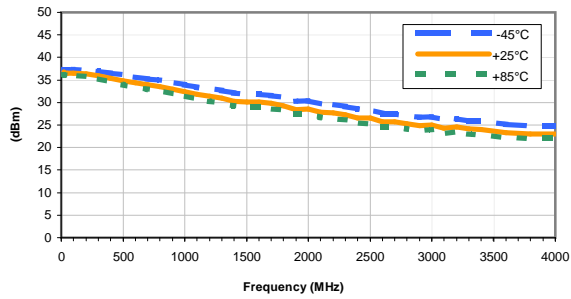


OUTPUT IP-3 vs. CURRENT

INPUT POWER = -20dB, Temperature = +25°C

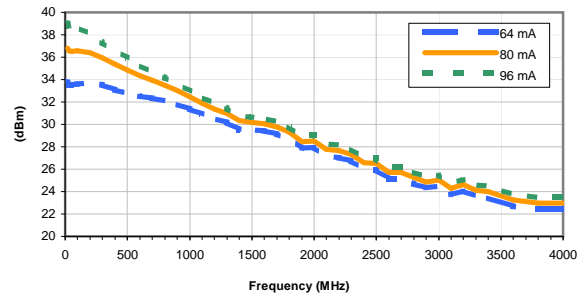


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 80 mA

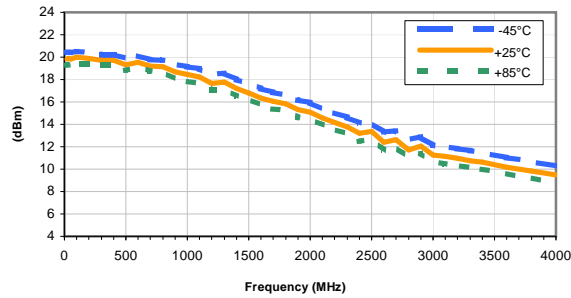


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

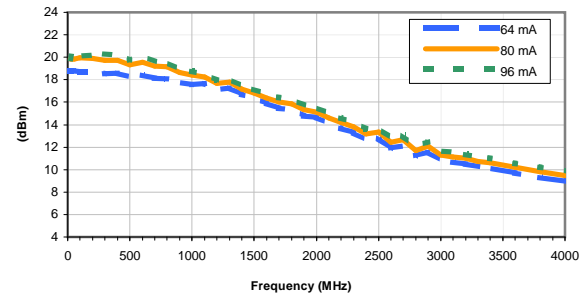

Noise Figure vs. TEMPERATURE

CURRENT = 80 mA

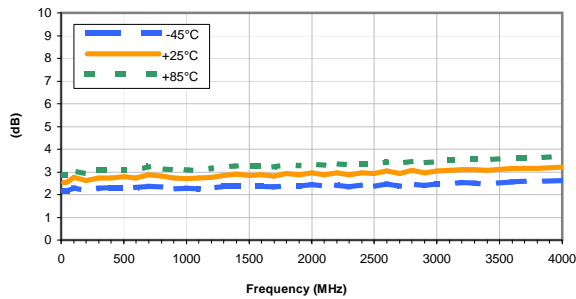

Noise Figure vs. CURRENT

Temperature = +25°C

