



## Typical Performance Curves


**GAIN vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.00V

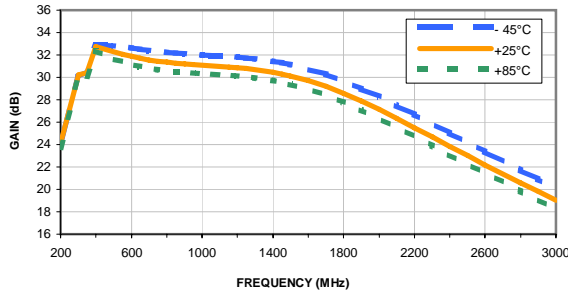


**GAIN vs. FREQUENCY & DEVICE VOLTAGE**  
INPUT POWER = -25dBm, Temperature = +25°C

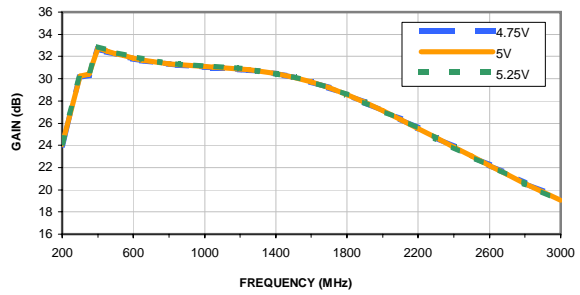


**ISOLATION vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.00V

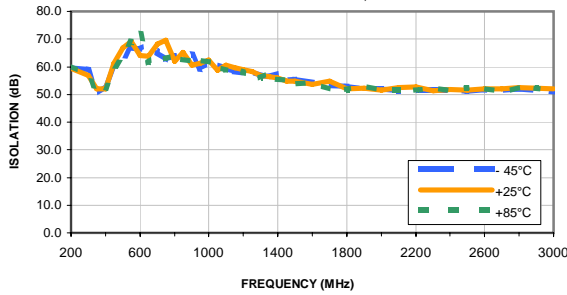


**ISOLATION vs. FREQUENCY & DEVICE VOLTAGE**  
INPUT POWER = -25dBm, Temperature = +25°C

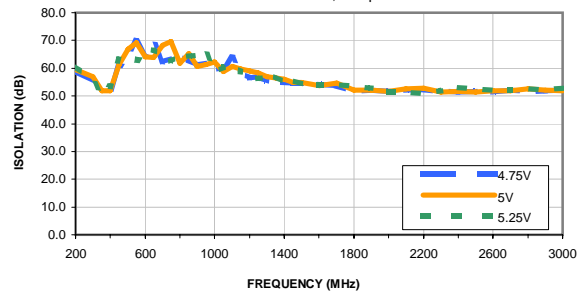


**INPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.00V

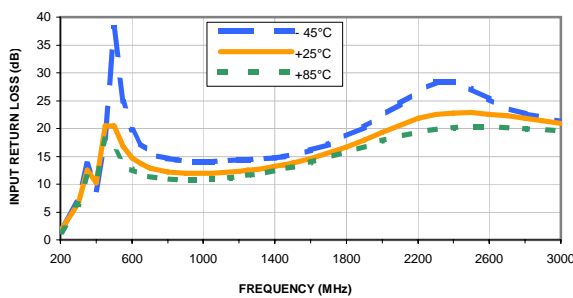


**INPUT RETURN LOSS vs. FREQUENCY & DEVICE VOLTAGE**  
INPUT POWER = -25dBm, Temperature = +25°C

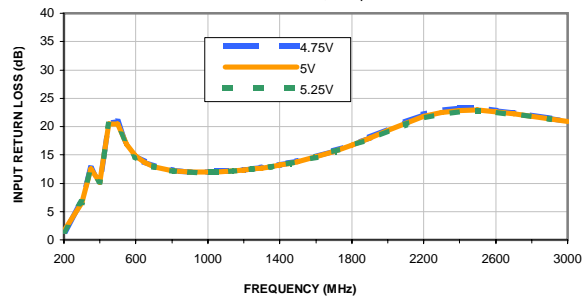

**OUTPUT RETURN LOSS vs. FREQUENCY & TEMPERATURE**  
INPUT POWER = -25dBm, Vd = 5.00V

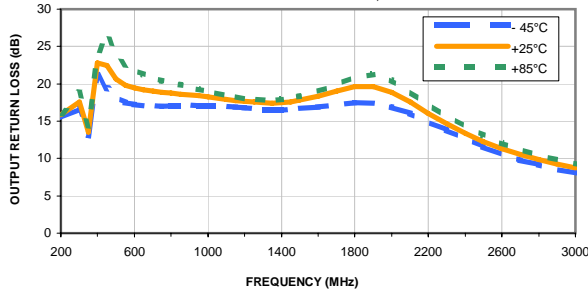

**OUTPUT RETURN LOSS vs. FREQUENCY & DEVICE VOLTAGE**  
INPUT POWER = -25dBm, Temperature = +25°C

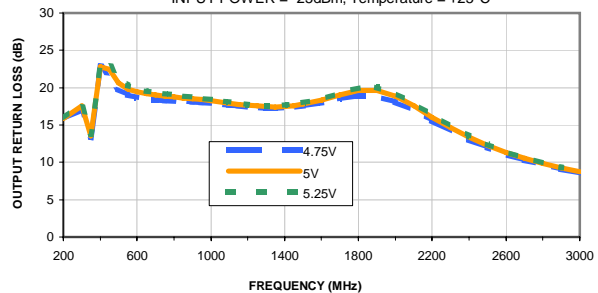

## Typical Performance Curves

