Typical Performance Curves

Attenuation @ 1000 MHz

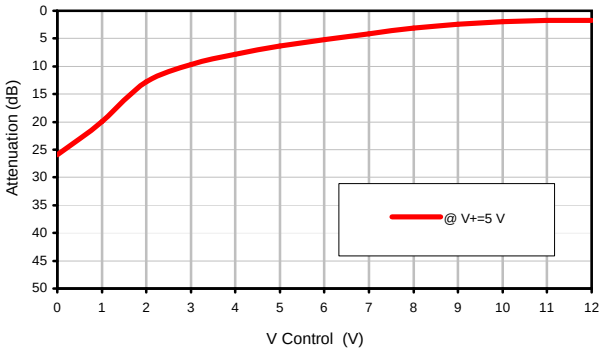

Attenuation @ V+=5 V

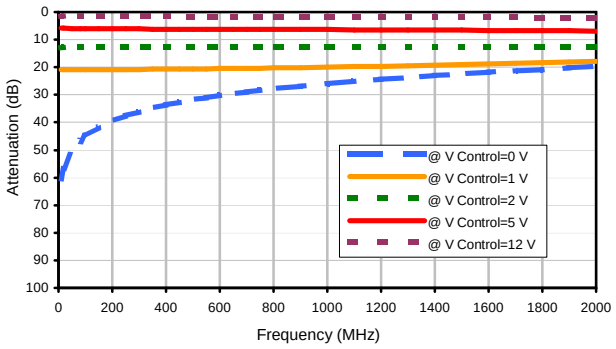

Input Return Loss @ V+=5 V

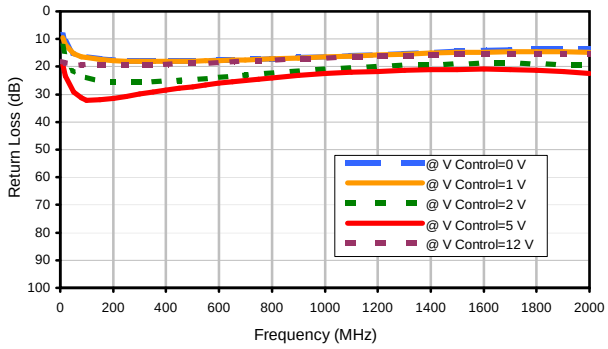

Output Return Loss @ V+=5 V

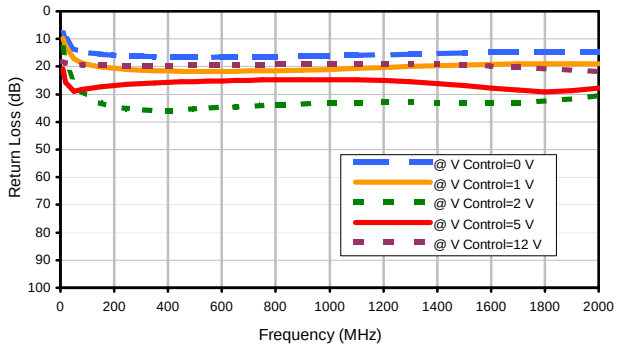

Input IP3 @ V+=5 V

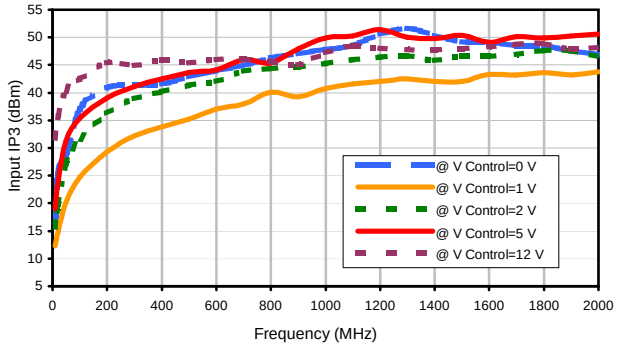

Phase Shift @ V+=5 V

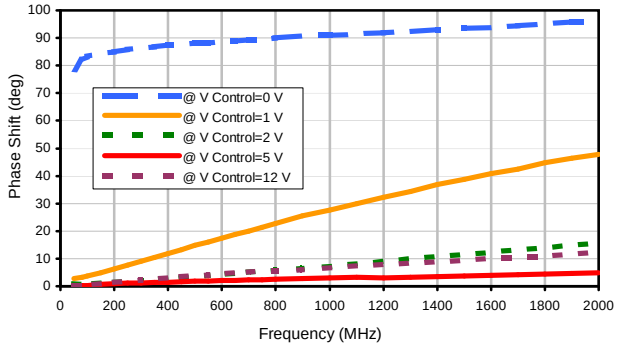

Mini-Circuits®
IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com