



Typical Performance Curves


Conversion Loss @ IF=30MHz

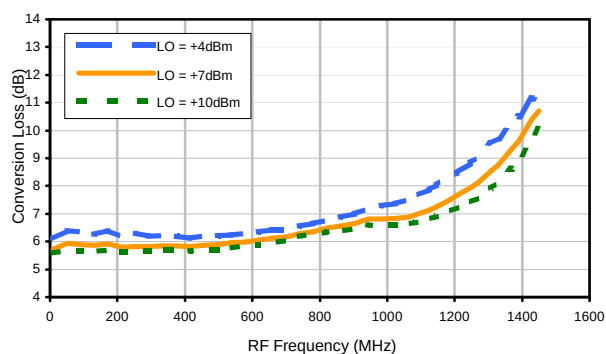


Conversion Loss vs. IF @ RF=500.1MHz

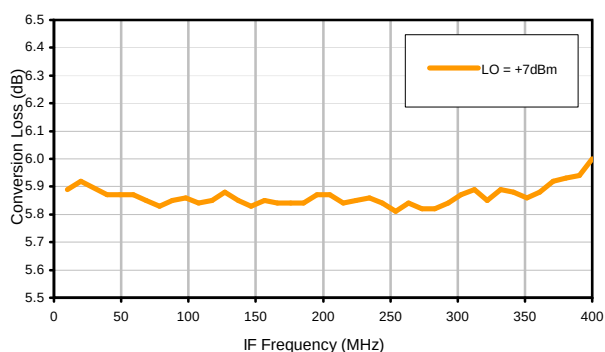


Conversion Loss vs. IF @ RF=50.1MHz

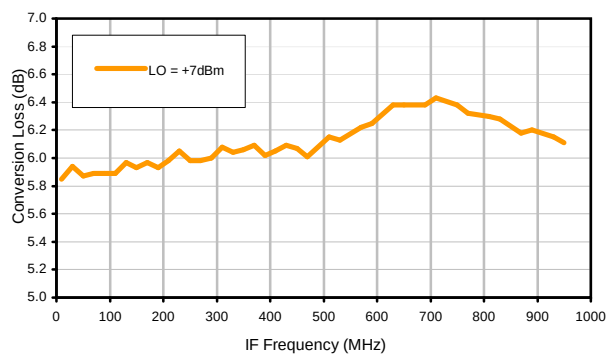


Conversion Loss vs. IF @ RF=1000.1MHz

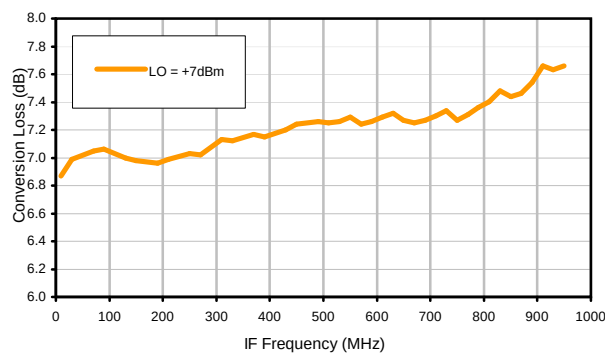

IP3 Input

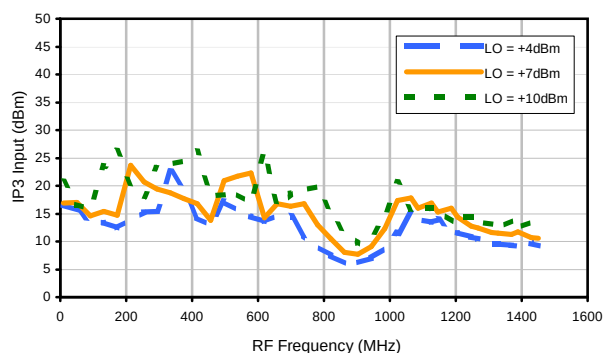


Compression @ RF IN=+1dBm

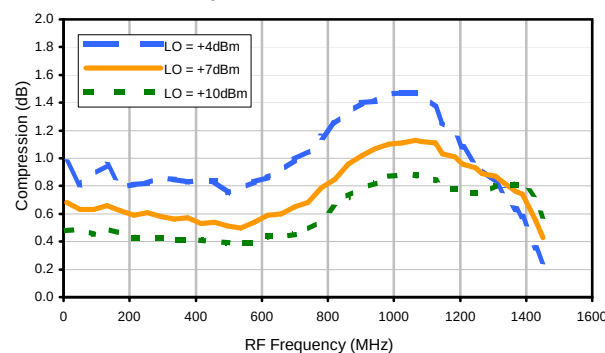


Typical Performance Curves


LO-RF Isolation

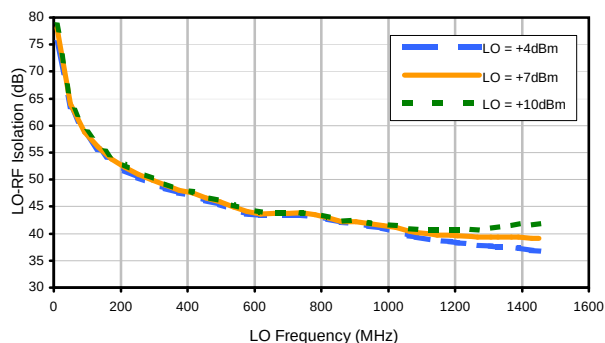


LO-IF Isolation

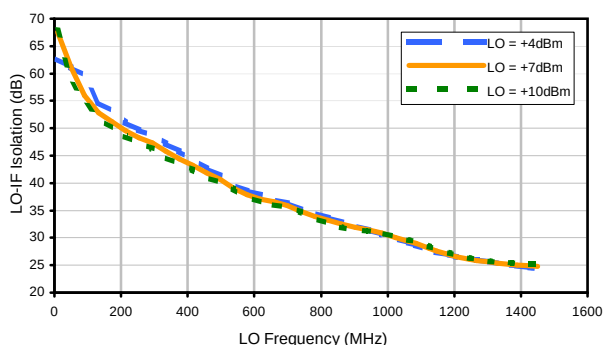


RF-IF Isolation

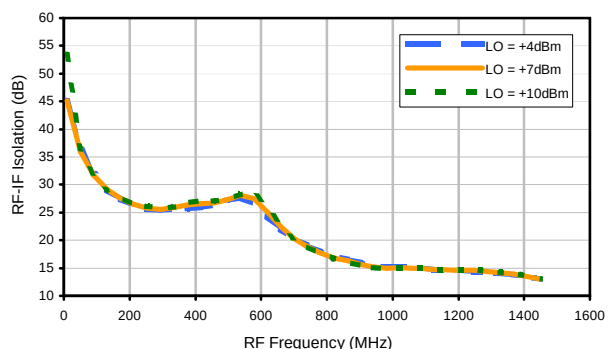


RF VSWR

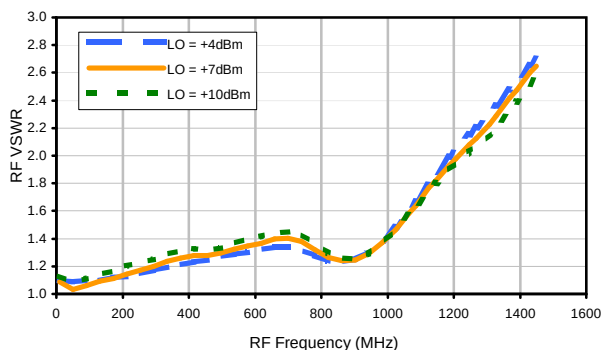

LO VSWR

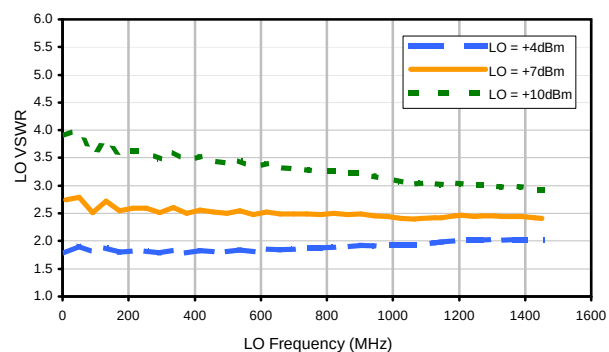

IF VSWR

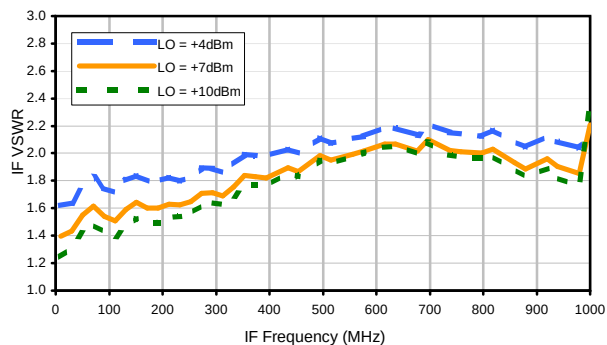

REV. X2

ZP-2+

100818

Page 2 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, instantly • For detailed performance specs & shopping online see



Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	13	25	20	40	36	45	39	38	34	52
1	-	21	+0	27	12	29	20	39	41	38	57	44
2	>100	74	58	74	59	76	57	74	70	>80	>80	68
3	>100	>80	70	>80	76	77	65	>80	>80	78	>80	71
4	>100	>80	>80	>80	>80	78	>80	>80	>80	>80	>80	>80
5	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
6	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
7	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
8	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
9	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
10	>100	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80	>80
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -14.00 dBm.
LO IN: 530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -19.97 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	22	35	32	52	47	56	51	54	51	69
1	-	21	+0	27	12	30	21	43	42	44	63	51
2	99	68	50	65	50	77	52	69	65	73	73	60
3	>100	59	46	58	48	55	41	57	47	56	63	53
4	>100	>90	79	84	70	89	67	81	63	78	76	>90
5	>100	80	69	76	60	72	58	68	58	71	65	81
6	>100	>90	>90	>90	89	>90	84	>90	84	>90	>90	>90
7	>100	88	>90	>90	80	>90	89	>90	82	86	75	>90
8	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
9	>100	>90	>90	>90	>90	>90	>90	>90	89	>90	86	>90
10	>100	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

LO HARMONICS ORDER

Test conditions: RF IN: 500.1 MHz; -4.00 dBm.
LO IN: 530.01 MHz; +7.00 dBm
IF OUT: 29.91 MHz; -10.06 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.
2. + entry denotes harmonics are in (dBc) above IF OUTPUT.
3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2
ZP-2+
100818
Page 3 of 3

