
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M94649	NEW RELEASE	10/11/04	MMG	WL
A	M102713	ADDED "WITH SMOBC"	01/14/06	GF	IL

SUGGESTED MOUNTING CONFIGURATION FOR BJ293 CASE STYLE, "hp" PIN CONNECTION.

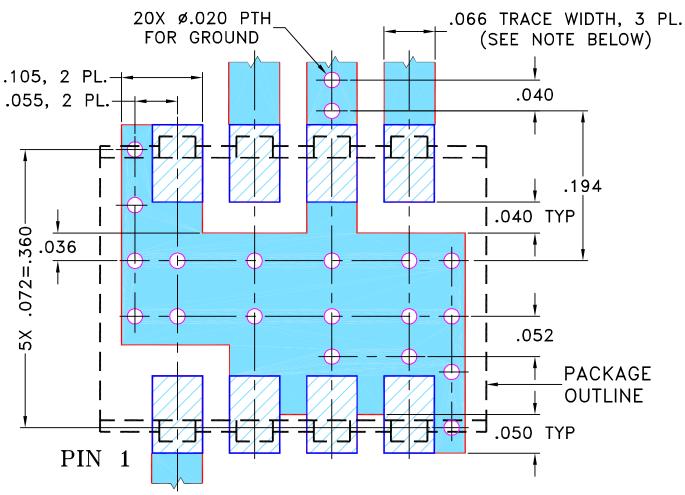

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" \pm 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE		7 3 6 .	. ~		• 4 ®			
DIMENSIONS ARE IN INCHES	DRAWN	MMG	10/04/04	Mini-Circuits 13 Neptune Aven					ne Avenue	enue	
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	AV	10/11/04						NI 11235	11235	
3 PL DECIMALS ± .005	APPROVED	WL	10/11/04								
FRACTIONS ±] PI	L, hp,	BJ2	93. J	YM.	TB-	-259	
☐ Mini-Circuits ®					, T ,,						
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				SIZE A	code ident 15542	DRAWING NO: 98-PL-080			REV:		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					8PL080	SCALE: Q	8:1	SHEET:	1	<u></u>	
					AOLTOO		0.1			Or I	