
THIRD	ANGLE	PROJECTION	
() {		

	REVISIONS							
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH			
OR	M82272	NEW RELEASE	08/06/02		DJ			
A	M102713	UPDATED NOTES, ADDED "WITH SMOBC"	01/16/06	GT	IL			

SUGGESTED MOUNTING CONFIGURATION FOR QQQ569 CASE STYLE, "cz" PIN CONNECTION

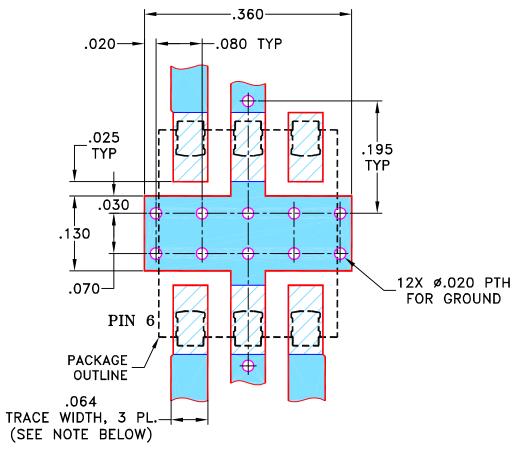

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

V/_/_								
UNLESS OTHERWISE SPECIFIED		INITIALS	DATE			·	• 4 ®	
DIMENSIONS ARE IN INCHES	DRAWN	AV	07/23/02		\perp Mini	i-Circu	1ts 13 Nep	tune Avenue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	LC	08/06/02		Τ		Brookly	NI 11235
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	DJ	08/06/02					
FRACTIONS ±] PL	cz	QQ569, LI	RDC-J.	TB-31
∭ Mini−Circuits ®					,, -,	- V -V	,	
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.					1			
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT. MINI—CIRCUITS RESERVES ALL PROPRIETARY		SIZE	CODE IDENT	DRAWING NO:		REV:		
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.			A	15542	98-PL	-087	A	
						T		
ACHEETAL DWG DEV.A DATE:01/12/05			FILE: (98PL087	SCALE: 6:1	SHEET:	OF 1	