
THIRD AND	GLE PROJECTION	

	REVISIONS					
REV	REV ECN No. DESCRIPTION			DR	AUTH	
OR	OR M82272 NEW RELEASE		08/06/02	GF	DJ	
A	A M102713 UPDATED NOTES, ADDED "WITH SMOBC"		01/16/06	GT	IL	

SUGGESTED MOUNTING CONFIGURATION FOR BL372 CASE STYLE, "kf" PIN CONNECTION

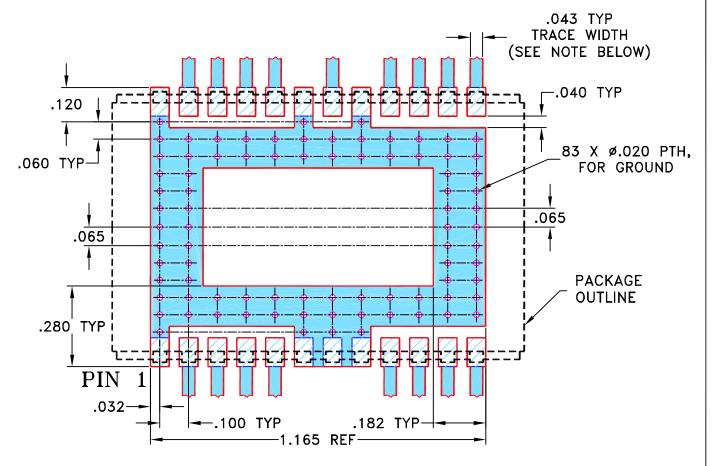

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	
DIMENSIONS ARE IN INCHES	DRAWN	GF	07/23/02	
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	HY	08/06/02	
3 PL DECIMALS ± .005	APPROVED	D1	08/06/02	
FRACTIONS ±				
☐ Mini-Circuits ®				

PL, kf, BL372, JEPS, TB-135

Mini-Circuits 13 Neptune Avenue Brooklyn NY 11235

SIZE A	code ident 15542	DRAWING NO: 98-PL-090			REV:	
FILE: 9	8PL090	SCALE:	3:1	SHEET:	1	OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE; MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95