


THIRD ANGLE PROJECTION




REVISIONS


REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M93753	NEW RELEASE	08/27/04	MMG	HY
A	M102713	ADDED "...WITH SMOBC"	01/12/06	GF	IL

**SUGGESTED MOUNTING CONFIGURATION
FOR BJ293 CASE STYLE, "qa" PIN CONNECTION.**

.065±.002 TRACE WIDTH, 3 PL.
(SEE NOTE BELOW)

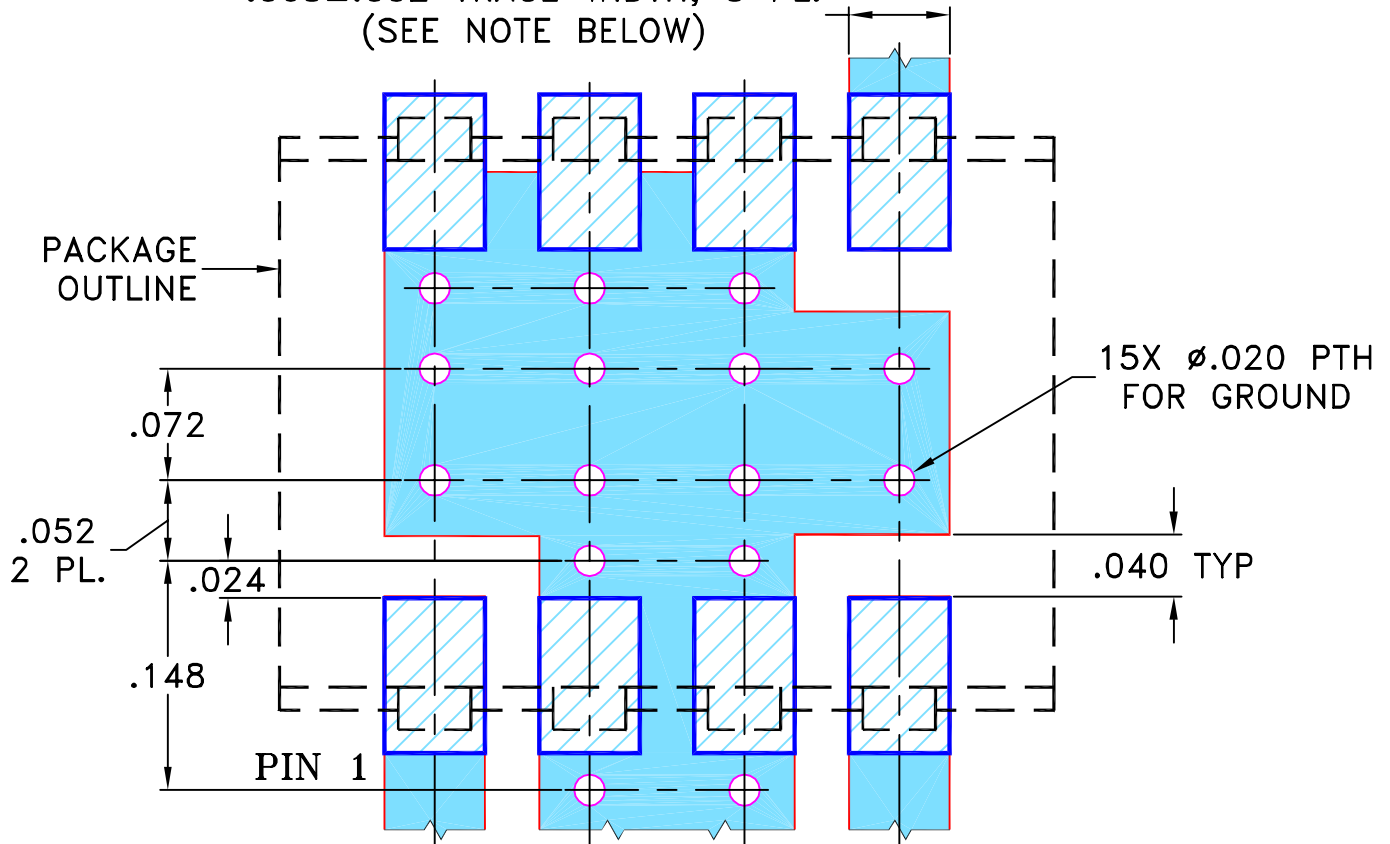

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



SOLID BLUE DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DIAGONAL HATCHING DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES
TOLERANCES ON:
2 PL DECIMALS ±
3 PL DECIMALS ± .005
ANGLES ±
FRACTIONS ±

DRAWN

MMG

08/12/04

CHECKED

AV

08/26/04

APPROVED

HY

08/27/04



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, qa, BJ293, JYPJ-2, TB-290

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-167

REV:
A

FILE: 98PL167

SCALE: 8:1

SHEET: 1 OF 1

ASHEETA1.DWG REV:A DATE:01/12/95