


REVISIONS											
REV	ECN No.	DATE	DR	AUTH							
OR	M107879	NEW RELEASE (FROM RAVON)	11/06	DK	HH						
OR	R66100	NEW RELEASE (FROM RAVON)	11/06	DK	НН						

SUGGESTED MOUNTING CONFIGURATION FOR HZ1198 CASE STYLE, "rg" PIN CONNECTION, 50 Ω

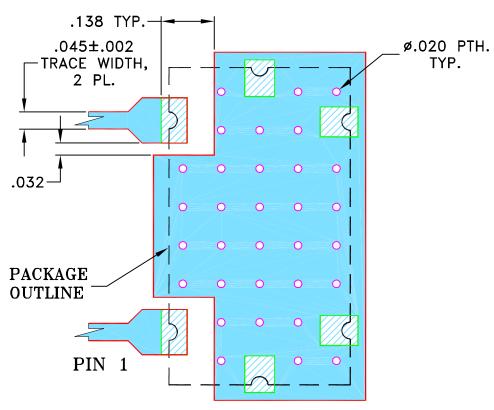

NOTES:

- 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE	J 3.6.		. a					
DIMENSIONS ARE IN INCHES	DRAWN	DK (RAVON	14 NOV 06		Mini-Circuits® 13 Neptune Aven Brooklyn NY 1123						ne Avenue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	RZ (RAVON	14 NOV 06		Brooklyn N1 11235						
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	HH (RAVON	14 NOV 06	Ι	DI wa U71100 DDIV TD 4001						
FRACTIONS ±				1	PL, rg, HZ1198, DPLX, TB-400+						
Mini-Circuits ® This document and its contents are the property of mini-circuits. Except for use expressly granted, in writing, to its vendors, vendee and the united states government, mini-circuits reserves all proprietary design, use, manufacturing and reproduction rights thereto. These contents shall not be used, duplicated or disclosed to any outside					$50~\Omega$						
						code ident 15542	DRAWING NO: 98-PL-247		REV:		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95				FILE:	98	3PL247	SCALE:	4:1	SHEET:	1	OF 1