
THIRD AN	NGLE PROJECTION
	+

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M109017	NEW RELEASE	12/29/06	MMG	WP

## SUGGESTED MOUNTING CONFIGURATION FOR JB1233 CASE STYLE, "rw" PIN CONNECTION

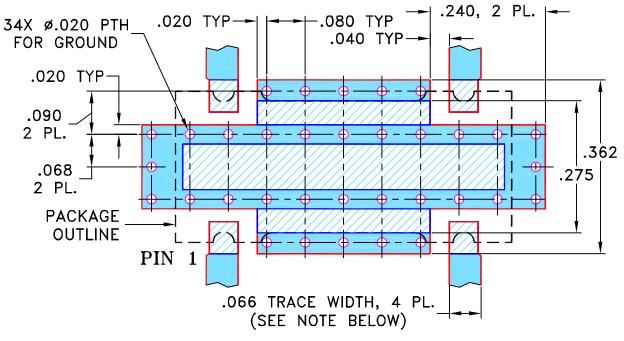

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030"  $\pm$  .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE		7 3 6 1	. ~		• 4 (R)		
DIMENSIONS ARE IN INCHES	DRAWN	MMG	12/21/06		$\sqcup$ Mini	-Circuits®			13 Neptune Avenue	
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	AV	12/29/06		T		Brooklyn NY			NI II235
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	WP	12/29/06							
FRACTIONS ±				ΙPL.	rw, J	B12	33. S	YBD	. TB	3-398
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE A	45540 00 DI 260				REV:		
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  ASHEETA1.DWG REV:A DATE:01/12/95				FILE: Q	8PL260	SCALE:	5:1	SHEET:	1	OF 1