


REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M112242	NEW RELEASE	07/05/07	MMG	HY
A	M138952	PIN CONNECTION 22SP01 WAS "sq"	10/03/12	GF	WP

SUGGESTED MOUNTING CONFIGURATION FOR
JF1258 CASE STYLE, "22SP01" PIN CONNECTION



- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE.
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

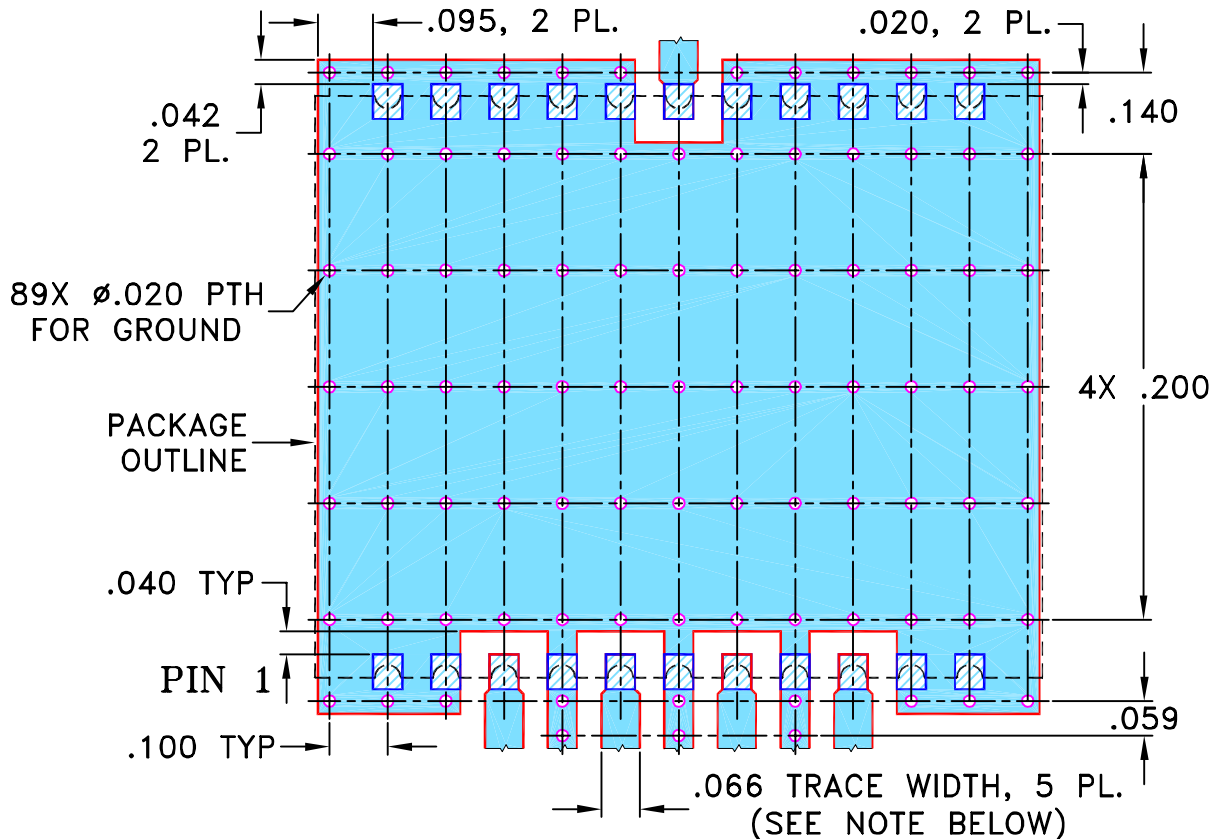

DENOTES PCB COPPER LAYOUT WITH SMOBC
 (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS $\pm$ 3 PL DECIMALS $\pm$.005 ANGLES $\pm$ FRACTIONS $\pm$	DRAWN	MMG	06/28/07
	CHECKED	AY	07/05/07
	APPROVED	HY	07/05/07



Mini-Circuits® 13 Neptune Avenue
 Brooklyn NY 11235

PL, 22SP01, JF1258, TB-441+

Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.			
ASHEETA1.DWG REV:A DATE:01/12/95			

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-273	A
FILE:	98PL273	SCALE:	SHEET:
		3:1	1 OF 1