
## THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE		AUTH
OR	M114550	NEW RELEASE	11/15/07	AV	WP

## SUGGESTED MOUNTING CONFIGURATION FOR DQ1225 CASE STYLE, "12SP02" PIN CODE

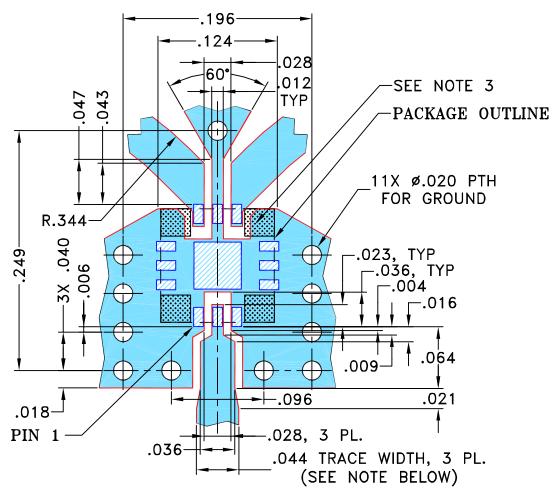

## NOTES:

- 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020"  $\pm$  .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- 3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COI

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	INITIALS DA		DATE								
DIMENSIONS ARE IN INCHES	DRAWN	AV	11/13/07	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235							
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	MMG	11/15/07							NI 11239	1235
3 PL DECIMALS ± .005	APPROVED	WP	11/15/07	1							
ANGLES ± FRACTIONS ±				] PL	, 12SP02	2. DQ	1225.	GP2.	TB	-453	+
Mini—Circuits ®  This document and its contents are the property of mini-circuits. Except for use expressly granted, in writing, to its vendors, vendee and the united states government, mini-circuits reserves all proprietary					,	-,	<b>,</b> ,	,			
						1					
					CODE IDENT	DRAWING				REV:	
DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				A	15542	98-PL-282				OR	
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.					98PL282	SCALE:	10:1	SHEET:	1	<b>∩I</b> F 1	
	ASHEFTA1 D	MC BEA-Y DY.	TF:01 /12 /95	1	301 TYON	ı	10.1	1	1	Or I	