
THIRD ANGLE PROJECTION	

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M119547	NEW RELEASE	09/17/08	AV	HY

SUGGESTED MOUNTING CONFIGURATION FOR HU1374 CASE STYLE, "14SQ05" PIN CODE

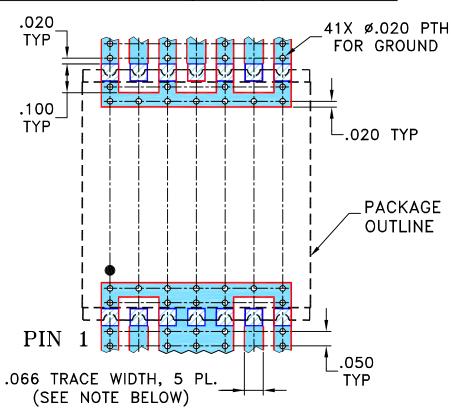

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" \pm .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED	ED INITIALS DATE			7.5							
DIMENSIONS ARE IN INCHES	DRAWN	INITIALS DATE WN AV 09/12/08 Mini-Circuits 13 Neptune Avenue Brooklyn NY 11235						1e			
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	₽₩	09/17/08	Brooklyn N					N1 11235		
3 PL DECIMALS ± .005	APPROVED	HY	09/17/08]							
FRACTIONS ±									F		
⊞ Mini−Circuits ®											
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE			SIZE	CODE IDENT	DRAWING	NO:			REV:		
			A	15542	98-PL-292 OF			R			
				FILE: O	8PL292	SCALE:	6:1	SHEET:	1	OF 1	1
ASHEETA1.DWG REV:A DATE:01/12/95				8	OLTYA	0.1			T	OI,	⊥