



THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M124738	NEW RELEASE	04/10	DK	HH
OR	R77823	NEW RELEASE	04/10	DK	HH

SUGGESTED MOUNTING CONFIGURATION

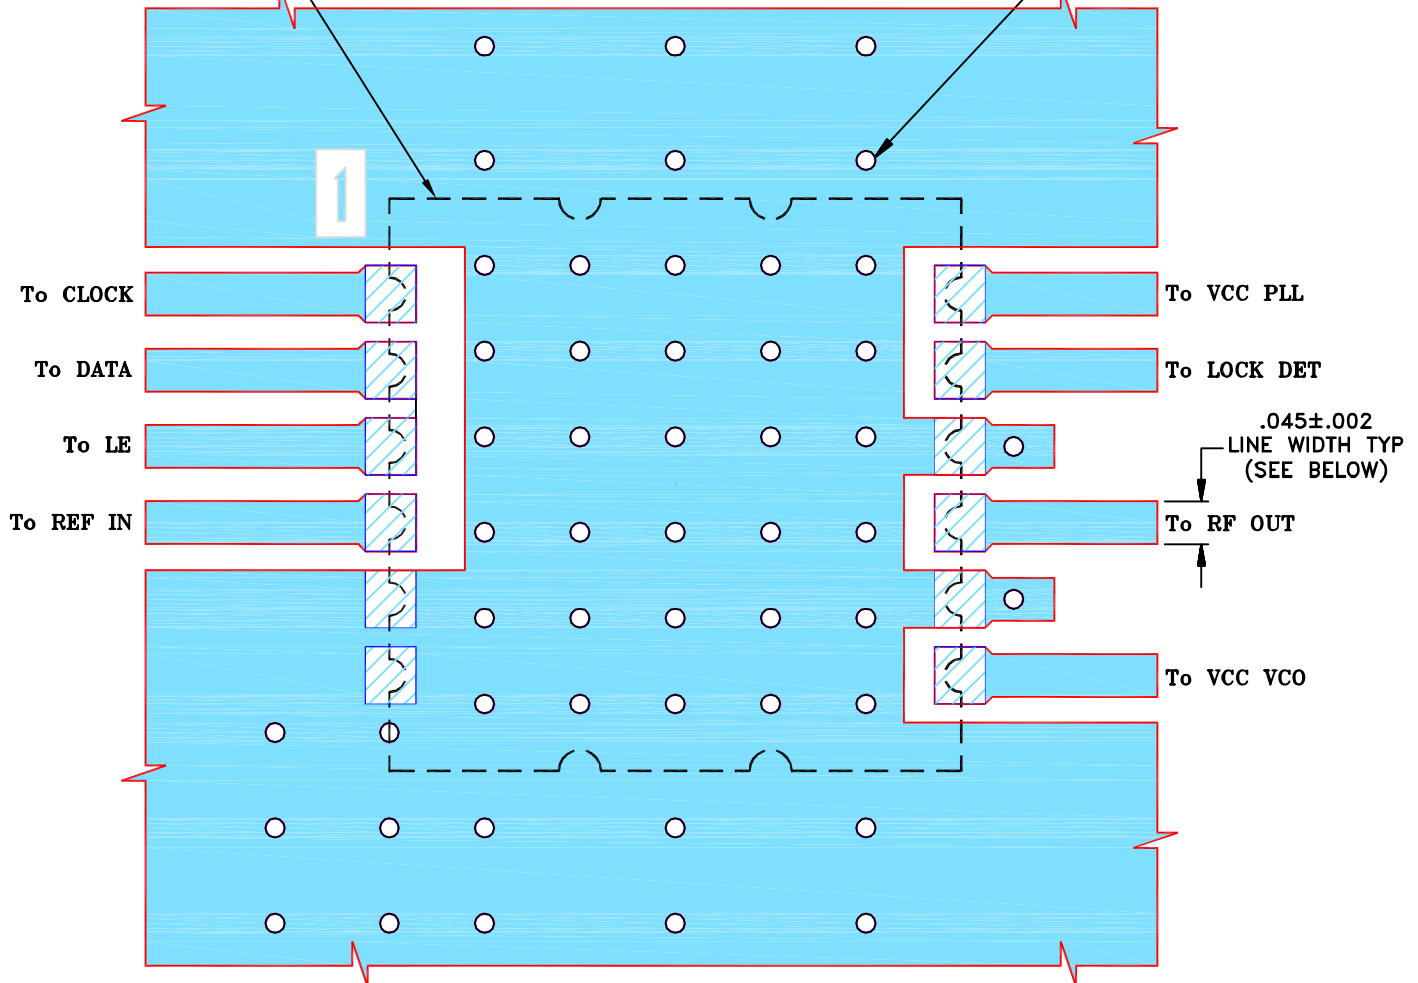FOR KJ1367 CASE STYLE, 12SY01 PIN CONNECTION, 50 Ω .Ø.020 PTH. TYP.
FOR GROUNDPACKAGE
OUTLINE

NOTES:

- TRACE WIDTH IS SHOWN FOR R04350B WITH DIELECTRIC THICKNESS.
.020"±.0015". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED

INITIALS

DATE

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
2 PL DECIMALS ±
3 PL DECIMALS ± .005
ANGLES ±
FRACTIONS ±

DRAWN

DK (RAVON)

06 APR 10

CHECKED

DH (RAVON)

07 APR 10

APPROVED

HH (RAVON)

07 APR 10



Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, 12SY01, KJ1367, SSN
TB-552+ (50 Ω)

SIZE
A

CODE IDENT
15542

DRAWING NO:
98-PL-317

REV:
OR

FILE: 98PL317

SCALE: 5:1

SHEET: 1 OF 1

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS.
EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY
DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.
THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95